



UNIVERSITAS BHAYANGKARA JAKARTA RAYA FAKULTAS TEKNIK

Kampus I: Jl. Harsono RM No.67, Ragunan, Pasar Minggu, Jakarta Selatan 12550

Telepon: (021) 27808121 - 27808882

Kampus II: Jl. Raya Perjuangan, Marga Mulya, Bekasi Utara, Jawa Barat

Telepon: (021) 88955882 Fax.: (021) 88955871

Web: www.ubharajaya.ac.id/ft/ Email: ft@ubharajaya.ac.id

SURAT TUGAS

Nomor: ST/004/I/2022/FT-UBJ

Pertimbangan : Bahwa dalam rangka Penelitian Universitas Bhayangkara Jakarta Raya sebagai penunjang Tri Dharma Perguruan Tinggi di Universitas Bhayangkara Jakarta, maka untuk itu perlu dikeluarkan Surat Tugas.

- Dasar :
1. Keputusan Mendiknas RI Nomor : 184/V/2001, tanggal 23 Nopember 2001, tentang Pedoman, Pengendalian dan Pembinaan Program Diploma, Sarjana dan Pascasarjana di Perguruan Tinggi.
 2. Keputusan Dirjen Dikti Nomor : 034/Dikti/Kep/2002, tanggal 3 Juli 2002, tentang Perubahan dan Peraturan Tambahan Pedoman Pengawasan Pengendalian dan Pembinaan Program Diploma, Sarjana dan Pascasarjana di Perguruan Tinggi.
 3. Rencana Kerja dan Anggaran Pembelanjaan Universitas Bhayangkara Jakarta Raya Tahun 2020/2021.

DITUGASKAN

No.	NAMA	NIDN
1.	Yuri Delano Regent Montororing, S.T., M.T.	0309098501
2.	Murwan Widyantoro, S.Pd., M.T.	0301048601
3.	Ir. Achmad Muhazir, M.T.	0316037002

- Untuk :
1. Bertugas untuk artikel publikasi ilmiah dengan judul "Production process improvements to minimize product defects using DMAIC six sigma statistical tool and FMEA at PT KAEF" pada ICCGANT 2021 Journal of Physics: Conference Series.
 2. Melaporkan hasil pelaksanaan kegiatan tersebut secara tertulis kepada Dekan Fakultas Teknik Universitas Bhayangkara Jakarta Raya.
 3. Melaksanakan perintah ini dengan penuh rasa tanggung jawab.

Dikeluarkan di : Bekasi

Pada Tanggal : 3 Januari 2022

Pjs. DEKAN FAKULTAS TEKNIK

Dr. TSMANIAH, S.Si., M.M.

NIP: 9604028

Paraf:

1. Ka. Prodi TID.....

Production process improvements to minimize product defects using DMAIC six sigma statistical tool and FMEA At PT. KAEF

Yuri Delano Regent Montororing¹, Murwan Widyantoro¹, and Achmad Muhazir¹

¹Departement of Industrial Engineering, Faculty of Engineering, Bhayangkara Jakarta Raya University

yuri.delano@dsn.ubharajaya.ac.id

Abstract. PT KAEF is one of the pharmaceutical manufacturing industries in Indonesia that producing various kinds of drug variants. Currently, PT KAEF is experiencing problems in the form of product defects that exceed the company's standard, which is 1%. By using the DMAIC Six Sigma Statistical tool (Define, Measure, Analyze, Improve, and Control), it is possible to evaluate the possibility of failure of the production system so that the cause of each product defect can be identified and get the right problem-solving solution and with Failure Mode Effects Mode can be known the solutions for the priority problems. From the search results, it can be seen that liquid products are the products with the most defects, with the causes of defects caused by errors in work procedures and the use of old machines. From the improvement results, it was found that the level of product defects decreased from 2,26% to 0,93% or in sigma level increase from 4,18 to 4,46.

1. Introduction

Global economic progress impacts all fields, including the pharmaceutical industry in Indonesia. Manufacturers are required to create quality, safe and valuable medicinal products. For this reason, the pharmaceutical industry in Indonesia needs to implement quality control to ensure that consumers get medicinal products of the desired quality. Quality is a dynamic condition associated with products, people or labor, processes and tasks, and environmental changes that meet or exceed consumer expectations [1] [2] [3].

PT KAEF is a pharmaceutical company in Indonesia that focuses on the pharmaceutical industry. Currently, PT KAEF is a very influential producer of prescription and non-prescription products in the national market, and at current condition is experiencing problems related to quality. Difficulties that arise in the production process need to be improved in quality to reduce product defects. Production data shows that a product defect causes the company's target not to be achieved. The production data of the number of product defects at PT KAEF are presented in table 1.

Table 1. Defect Rate Average

No	Product	Jul	Aug	Sep	Oct	Nov	Dec	Defect Rate
1	Liquid	2,82	2,50	2,23	2,18	1,76	2,07	2,26
2	Dry Syrup	0,52	0,50	0,53	0,54	0,55	0,60	0,54
3	Capsule	0,53	0,54	0,55	0,56	0,54	0,52	0,54

It can be seen in table 1 above that the percentage of defects rate more than the company standard, which is 1%. It can be described as a liquid product with a 2.26% defect, 0.54% dry syrup product, and 0.54% capsule. The level of defect will affect its competitiveness. Therefore, companies should strive to control the process and product quality as much as possible to reduce the defect rate. Quality control can be carried out in various ways, including statistical and other methods [4]. There are variations in the manufacturing process that can affect the quality of the product you make. Therefore, these fluctuations need to be reduced [5].

2. Research Methodology

This study aims to resolve the causes of quality problems that occur in PT. KAEF. The following are descriptions of the research methods in this study.

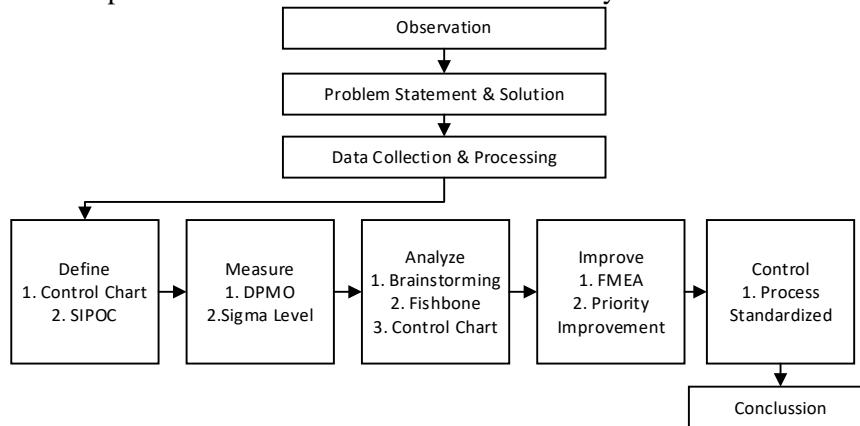


Figure 1. Research Framework

Observation is used to observe the actual conditions that occur so that the problem statement can be determined. If the cause of the problem is known, it will be easier to provide alternative solutions to the problem. Data processing to find out how to control and improve the quality of liquid products that are still below the company's standard provisions. The data processing stage will be described using the DMAIC stages, namely Define, Measure, Analyze, Improvement, and Control [6] [7] [8] [9]. The following is a description of each stage:

- a. DMAIC (Define, Measure, Analyze, Improve, Control) to optimize quality applied to the production department.
- b. FMEA (Failure Mode and Effect Analysis) to identify the causes of failure/defects thoroughly accompanied by numerical weighting to determine the effects that need to be prioritized for improvement. The analysis is used to compare the results of improvements that have been improved, namely the current condition with the company's target [10] [11] [12]. Improvements are monitored continuously to reduce product defects at PT KAEF.

Conclusions and Suggestions are the last stages of this research. Conclusions are drawn from the results of problem-solving that are in line with the research objectives. From the results of this study, this research can give suggestions that help be followed up for the benefit of the company and the improvement of further research.

3. Results And Discussion

The production process for liquid product starts from the input of raw materials to become products and is explained with an operation process chart map as follows:

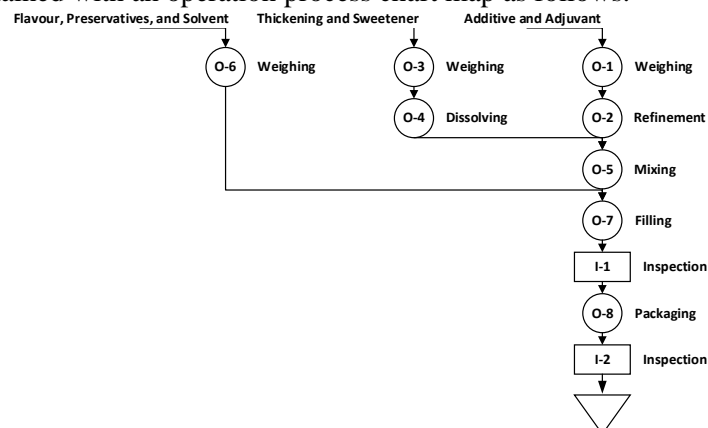


Figure 2. OPC for Liquid Products

3.1. Define Stage

Based on table 1, it can be seen that the highest percentage of defects is in liquid products. To identify critical causes of defects that occur, CTQ is used, which is a factor of the process that directly impacts achieving the desired quality. Based on observations at PT. KAEF, the CTQ factor that occurs can be seen in table 2.

Table 2. Critical To Quality

No	Defects	Number Of Defect	% Defect
1	Damaged Physical Packaging	866	59.03
2	Lack Of Completeness Of Contents	271	18.47
3	Incorrect Coding	193	13.16
4	Mix -Ups	91	6.20
5	Incorrect Labeling	37	2.52
6	Contamination	9	0.61
	Total	1467	100.00

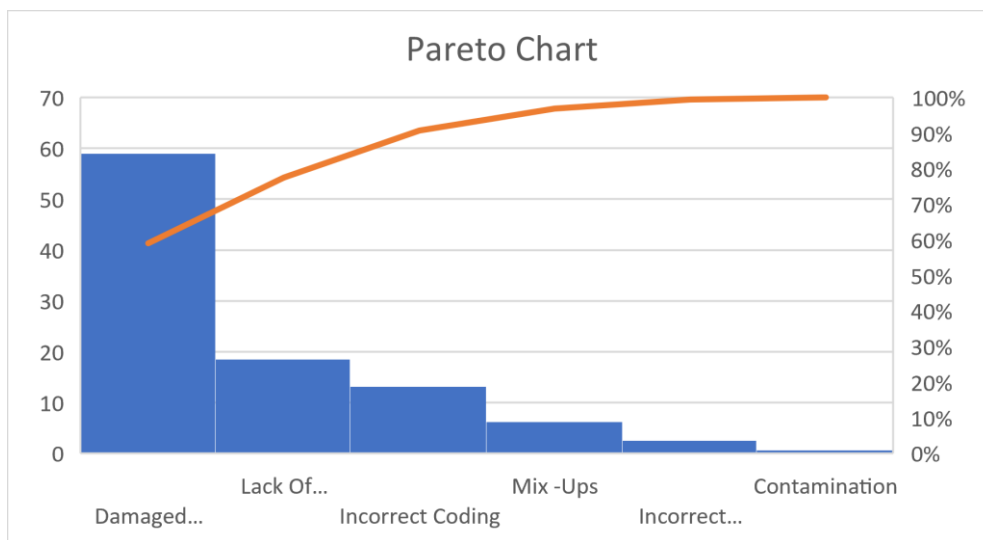


Figure 3. Pareto Diagram

Based on the Pareto chart as shown in figure 3, the biggest problem with damaged physically packaging has the highest level of product defects. Therefore, the problem taken is repairing the physical imperfections of damaged packaging.

3.1.1. SIPOC Diagram (Supplier, Input, Process, Output, Customer)

The SIPOC diagram was created better to understand the process from the supplier to the customer. The following is a SIPOC diagram for the production of liquid products.

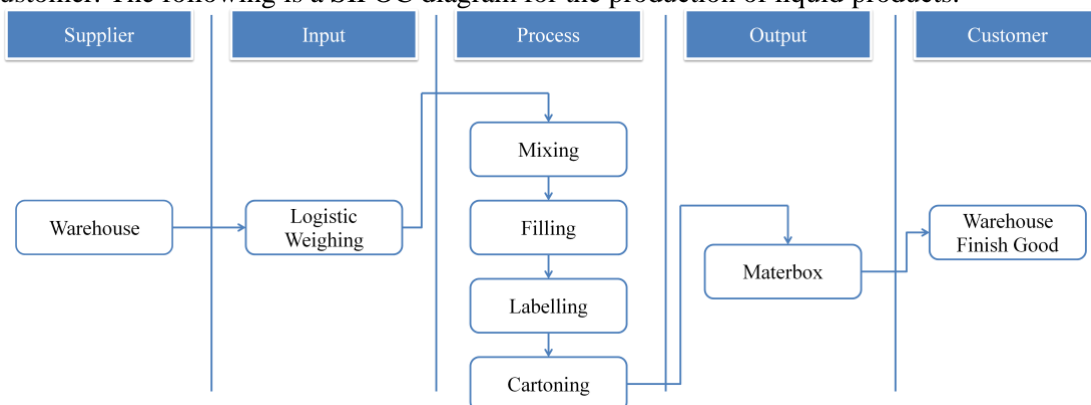


Figure 4. SIPOC Diagram

The explanation in the figure 4 is a) Suppliers provide the resources or materials needed by the company to produce goods in the form of drugs from the warehouse, b) Inputs are materials and or resources provided by suppliers to be transformed in the production process, c) Process is a series of actions and activities that convert materials (active substances and additives) into liquid drug preparations through processes, namely Mixing, Filling, Labeling, and Cartoning, d) Output in the form of drugs produced by the production process to be ready for distribution to customers in master box packaging, e) Customers (customers) or downstream processes that receive the output from the accepted process to the well-finished warehouse (finished drug warehouse), which is ready to be handed over to the distributor, namely the pharmaceutical wholesaler company.

3.2 Measure Stage

3.2.1 Process Capability Analysis

To predict how consistently the process meets the specifications determined by the company, the calculation of process analysis capability can be known. Then the calculation of production analysis capability is:

$$\bar{P} = \frac{\text{Total defect}}{\text{Total production}} \quad (1)$$

$$= \frac{1467}{65000} = 0,023 \quad (2)$$

$$Cp = 1 - \bar{P} \quad (3)$$

$$= 1 - 0,023 = 0,977 \quad (4)$$

From the calculation above, the Cp value is 0.977, which means the ability of the liquid production process to produce a standard production process is 97.7%.

3.2.2 DPMO and SQL

Defect Per Million Opportunity (DPMO) is a measure that shows defects per million opportunities, while Sigma Quality Level (SQL) offers a sigma value that describes the level of process performance. The calculation begins by finding the Defect Per Unit (DPU) value first by using the formula:

$$DPU = \frac{\text{Defect}}{\text{Sampling unit}} \quad (5)$$

$$DPO = \frac{DPU}{\text{Total CTQ}} \quad (6)$$

$$DPMO = DPU \times 1.000.000 \quad (7)$$

$$\text{Sigma Level} = (\text{NORMSINV}(1 - \text{DPMO})) + 1,5 \quad (8)$$

Table 3. Sigma Level for Liquid Products

Month	Jul	Aug	Sep	Okt	Nov	Des	Total	Average
Sampling Unit	1050	1150	1050	1100	1150	1000	65000	10833
0	0	0	0	0	0	0		
C Damaged Physical Packaging	161	174	160	144	112	115	866	144
Lack Of Completeness Of Contents	60	49	35	42	41	44	271	45
T Incorrect Coding	49	28	19	38	32	27	193	32
Q Mix -Ups	18	21	13	10	13	16	91	15
Incorrect Labeling	7	13	6	5	2	4	37	6
Contamination	1	3	1	1	2	1	9	2
Defect	296	288	234	240	202	207	1467	244,50
% Defect	2,82	2,50	2,23	2,18	1,76	2,07	13,56	2,26
DPU	0,03	0,03	0,02	0,02	0,02	0,02	0,14	0,02
DPO	0,00	0,00	0,00	0,00	0,00	0,00	0,02	0,01
DPMO	4698	4174	3714	3636	2928	3450	22600,51	3766,75
Sigma Level	4,10	4,14	4,18	4,18	4,26	4,20	25,05	4,18

Based on table 3 above, it can be seen that the average DPMO value of the liquid product is 3766,75, meaning that for every one million products produced, there are 3766,75 possible defects in the product. In comparison, the average sigma level is 4.18.

3.3. Analyze Stage

The third stage of the DMAIC concept is the analysis stage. The analysis process is carried out using Pareto diagrams and fishbone diagrams. The primary purpose of the analysis stage is to find the main focus of the repair process as well as find the root cause of several types of defects that occur in the repair process.

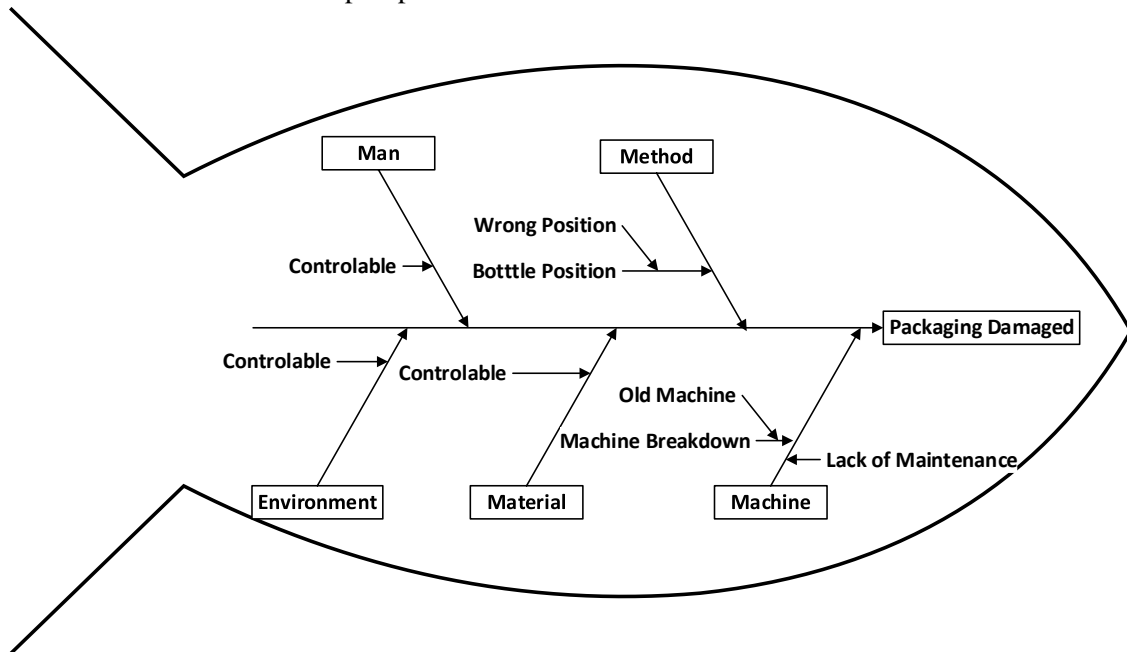


Figure 5. Fishbone Diagram

In Figure 5, there are three identifications of the causes of physical failure of damaged packaging in the method, namely not carrying out regular machine maintenance, improper placement of bottles and in the machine, namely the age of the device is old. In this case, it is necessary to improve the defect rate so that the company's target is achieved.

3..4. Improvement Stage

Failure Mode and Effect Analysis (FMEA) is used to determine the priority of repair after the cause of the error in the production process is known. Based on the data collection made, the next step is to create an FMEA table that provides value weighting using Severity, Occurrence, and Detection to generate a Risk Priority Number (RPN) value.

3.4 1 Determine the level of seriousness that occurs (Severity)

The severity of the effect is described on a scale of 1-10. The higher the ranking, the more serious the impact. The severity value of the resulting consequences can be seen in table 4.

Table 4. RPN Value of CTQ

Potential Failure Modes	Pottential Effect (S) Of Failures	SEV	OCC	DET	RPN	Rank
Packaging Damaged	Wrong Bottle Position	7	6	7	294	1
	Lack of Maintenance	7	4	8	224	3
	Obsolote Machine	6	5	8	240	2

3.4.2. FMEA Analysis

Based on data processing results using FMEA, the highest RPN value in the physical defect of damaged packaging is inappropriate bottle placement. The bottle is in the wrong position with a value of 294. This is because no supervision makes workers negligent in placing bottles in the filling machine. There are bottle placement problems shifted. Therefore, the resulting product produces failures such as physically damaged packaging. Lack of maintenance can also happen because of no preventive maintenance, so that that machine will be damaged frequently. The machine that PT. KAEF uses dominated with the old machine and needs more attention about their part. After we know the potential effect of failure, then we can make an action plan.

Action Planning for Failure Modes is made to determine the most appropriate action that has a high risk of failure. The data used are the results that have been obtained from the Failure Modes and Effects Analysis (FMEA) analysis by looking at the order of the highest RPN to be given attention. Furthermore, appropriate solutions are made to eliminate the root cause of the problem. Action Planning for Failure Modes table for dimensional defect problems can be seen in table 5.

Table 5. Action Planning for Failure Modes

Rank	Actionable Cause	Potensial Solutions	Design Validation
1	Lack of Supervision by the Head of Section	The Head of the Production Department must carry out regular supervision and create a work appraisal system for operators	Employee Work Report
2	No Sparepart	Analysis and Making of Spare Parts Every 6 Months	Sparepart Using Data
3	Lack of Maintenance Schedule	All Company Employees Perform Preventive Maintenance Every 3 Months By Cleaning And Performing Routine Inspections, Making Schedules To Perform Machine Maintenance	Maintenance Schedule Logbook Filling

Improvements made based on these solutions are expected to increase the value of process sigma, which is used as a benchmark for process quality to produce quality products. In general, the improvement of the above matters will improve the performance of the liquid preparation production process.

Table 6. Estimation Improvement Result

Month	Jul	Aug	Sep	Okt	Nov	Des	Total	Average
Sampling Unit	10500	11500	10500	11000	11500	10000	65000	10833
Damaged Physical Packaging	0	0	0	0	0	0	0	0
Lack Of Completeness Of Contents	60	49	35	42	41	44	271	45
Incorrect Coding	49	28	19	38	32	27	193	32
Mix -Ups	18	21	13	10	13	16	91	15
Incorrect Labeling	7	13	6	5	2	4	37	6
Contamination	1	3	1	1	2	1	9	2
Defect	135	114	74	96	90	92	601	100,17
% Defect	1,29	0,99	0,70	0,87	0,78	0,92	5,56	0,93
DPU	0,01	0,01	0,01	0,01	0,01	0,01	0,06	0,01
DPO	0,00	0,00	0,00	0,00	0,00	0,00	0,01	0,01
DPMO	2143	1652	1175	1455	1304	1533	9262	1543,64
Sigma Level	4,36	4,44	4,54	4,48	4,51	4,46	26,78	4,46

3.5 Comparison of current conditions with proposed conditions

Review and monitor the results of the improvement plan. Evaluation of the repair activities carried out to see how much effect the results of these improvements can be proven by comparing the results of the repairs with the results before the repairs.

Table 7. Comparison Current and Improvement Condition

Month	Jul	Aug	Sep	Okt	Nov	Des	% Defect	Sigma Level
Before Improvement	2,82	2,50	2,23	2,18	1,76	2,07	2,26	4,18
After Improvement	1,29	0,99	0,70	0,87	0,78	0,92	0,93	4,46

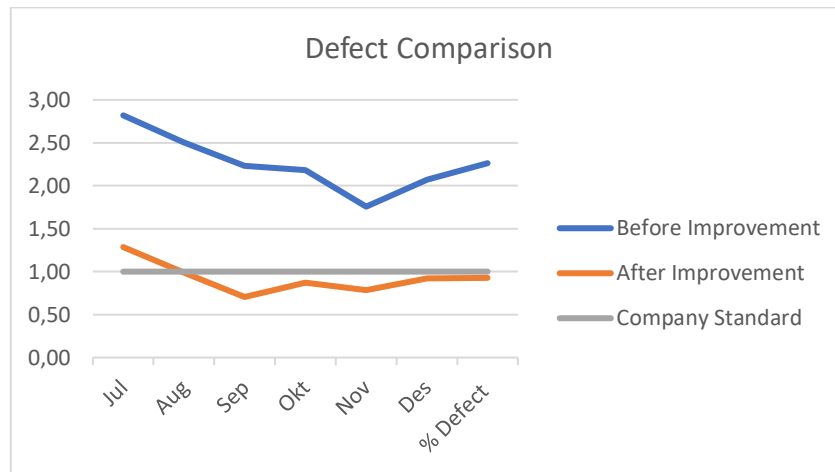


Figure 6. Defect Comparison

Comparison of current condition with repair condition. Review and monitor the results of the improvement plan. Evaluation of the repair activities carried out to see how much effect the results of these improvements can be proven by comparing the results of the repairs with the results before the repairs.

It can be seen from table 7, the comparison between the future sigma value and the current sigma value can increase the sigma value in the following way: Make employee performance reports by assessing whether the operator has followed the work instructions that have been made. There is a checklist for using spare parts data to facilitate monitoring of the availability of spare parts to be used. The machine can produce optimal performance by performing preventive maintenance, and a machine maintenance schedule logbook can prove machine monitoring. To prevent mix-ups, employees are given training and referrals scheduled by the PGA section on the characteristics of pharmaceutical preparations. SOP for attaching identity labels correctly and adequately to prevent inappropriate material taking is helpful to avoid mix-ups during the production process. Supervisors and employees care about others to improve the quality of the production process by making routine check schedules to verify each stage of the production process. With a label indicating a ready-to-use line, every employee does not feel confused or wrong in working, aiming to avoid contamination of the products to be produced.

3.6 Control Stage

At the control stage, namely monitoring the repaired processes to determine whether the improvements were correctly implemented or not, if the control remains stable within the specified limits, then the control stage is running well. The results have been made work standards by making standard operating procedures (SOP) and work instructions (WI).

The placement of the bottle is not appropriate, so that the bottle is in the wrong position, the working standard is made as follows.

Work Instructions For Placing Bottles Ready For Filling				
Document Number	Effective Date	Revision	Work Instruction	Page
SOP-1/1	1 Augustus 2021	1	Filling	1
Description				
1. Clear Bottles Are Placed In A Predetermined Area With An Identity Label Marking				
2. Insert The Clear Bottle Into The Bottle Blowing Machine In A Way That It Should Not Be Inserted In A Crossed State Or Through The Conveyor				
3. Bottle Blowing Machine Is Filled According To Predetermined Limits (Following The Predetermined Limit Line)				
4. The Operator Carefully Follows The Bottle Placement Process And Ensures The Bottle Is In Perfect Condition				
Sign:				

Figure 7. Work Instructions For Placing Bottles

The age of the machine is old, the engineering section makes a checklist of data on the use of spare parts as follows:

No.	Sparepart	Total	Remains	Taken By	Sign	PIC Sign
1	Sprocket Filling Machine	5				
2	Sprocket Mixing Machine	3				
3	Ruber	4				
4						
5						
6						

Figure 8. Checklist Of Spare Parts Usage

Periodic maintenance is not carried out, by filling out a logbook that can be verified, it will monitor machine maintenance periodically, such as the following logbook:

No.	Machine	No. Seri	Duration (hrs)	Maintenance date	Using Date	Using For Products	No. Batch	Sign
1	Filling	SN5212	4	20 July 2021	21 July 2021	123	A12	V
2	Mixing	SN6370	4	21 July 2021	22 July 2021	123	A15	V
3	Cartooning	SN7344	3	24 July 2021	25 July 2021	123	A15	V
4	Filling	SN5212	4	1 Agustus 2021	2 Agustus 2021	123	A17	V
5	Mixing	SN6370	4	2 Agustus 2021	3 Agustus 2021	123	A20	V
6	Cartooning	SN7344	3	10 Agustus 2021	11 Agustus 2021	123	A21	V
7								
8								

Figure 9. Maintenance Machine Logbook

4. Conclusion

Based on the results of data processing and analysis that has been done regarding this research, it can be concluded that:

With the improvement, the quality of liquid products increases, and the condition after modification exceeds the company's target, which can be proven by the company's sigma value of 4.18-sigma to 4.46-sigma. The causes of disability are caused by: The placement of the bottle is not appropriate, so that the bottle is in the wrong position. The machine is old. No periodic maintenance. There is no routine check schedule, so operators are negligent in their work.

Improvements made to reduce defective products include: Analysis and manufacture of spare parts need every three months. All company employees perform preventive maintenance every months to minimize engine damage. Controlling that is carried out to reduce defective products is making bottle placement work instructions, making spare parts checklists and process checking inventories, making machine usage logbooks, conducting training and refreshment for all production employees, and making ready-to-use line labels.

5. References

- [1] Morgan, J. and Liker, J. (2006). Toyota Product Development system. Productivity Press. New York.
- [2] Gaspersz, V. (2008). Total Quality Management. Jakarta: Gramedia Pustaka Utama.
- [3] Gasperz, V. (2012). All-In-One Management Toolbook. Bogor: Gramedia Pustaka Utama.
- [4] Montgomery, Douglas C. (2009). Introduction to Statistical Quality Control 6th Edition. United States: Jhon Wiley and Sons, Inc.
- [5] Gaspersz, V and Vontana, A. (2011). Lean Six Sigma for Manufacturing and Service Industries. Bogor: Vinchristo Publication.
- [6] Pande, P.S., Neuman, R.P., and Cavanagh, R.R. (2002). The Six Sigma Way. Yogyakarta: Andi.
- [7] Evan, J.R., and Lindsay, W.M. (2007). An Introduction To Six Sigma And Process Improvement. Jakarta: Salemba Empat.
- [8] Pande, S, P., Neuman, R, P., and Cavanagh, R, R.(2003). The Six sigma Way, New York: McGraw-Hill.
- [9] Afifah, (2010). Define, Measure, Analyze, Improve dan Control. Jurnal PASTI, IX(3), 248–256.
- [10] McDermott, R. E. (2009). The Basic of FMEA. 2nd Ed. USA: CRC Press.
- [11] McDermott, R. E., Mikulak, R. J. and Beauregard, M. R. (2009). The basic of FMEA.2nd Ed. New York: Taylor and Francis Group.
- [12] Chrysler. (2008). Potential Failure Mode and Effect Analysis (FMEA) Fourth Edition. Ford Motor Company and General Motors Corporation.

Acknowledgement

This work is supported by the Engineering Faculty Bhayangkara Jakarta Raya University and the Directorate of Research and Community Service. The authors also express gratitude to Departement Industrial Engineering for providing opportunities for growth through new and valuable research activities.

Production process improvements to minimize product defects using DMAIC six sigma statistical tool and FMEA at PT KAEF

by Cek Turnitin

Submission date: 13-Apr-2023 12:39PM (UTC+0800)

Submission ID: 2063202079

File name: Montororing_2022_J._Phys._Conf._Ser._2157_012032.pdf (1.33M)

Word count: 3728

Character count: 18529

PAPER · OPEN ACCESS

Production process improvements to minimize product defects using DMAIC six sigma statistical tool and FMEA at PT KAEF

To cite this article: Yuri Delano Regent Montororing ¹ et al 2022 *J. Phys.: Conf. Ser.* **2157** 012032

⁵ View the [article online](#) for updates and enhancements.

You may also like

- ⁹ - [Prioritization of Lean Six Sigma Success Factors using Pareto Analysis](#)
Anand S Patel and Kaushik M Patel
- ⁶ - [Minimization of Defective Products in The Department of Press Bridge & Rib Through Six Sigma DMAIC Phases](#)
YA Rochman and A Agustin
- ³ - [Analysis Quality Control of Carded and Combed Yarns Using Six Sigma Method](#)
H Henny, N Agnia and H Hardianto



244th Electrochemical Society Meeting

October 8 – 12, 2023 • Gothenburg, Sweden

50 symposia in electrochemistry & solid state science

▶ Deadline Extended!
Last chance to submit!

New deadline:
April 21
submit your abstract!

Production process improvements to minimize product defects using DMAIC six sigma statistical tool and FMEA at PT KAEF

Yuri Delano Regent Montororing¹, Murwan Widyantoro¹, and Achmad Muhazir¹

¹Departement of Industrial Engineering, Faculty of Engineering, Bhayangkara Jakarta Raya University

E-mail: yuri.delano@dsn.ubharajaya.ac.id

Abstract. PT KAEF is one of the pharmaceutical manufacturing industries in Indonesia that produces various kinds of drug variants. Currently, PT KAEF is experiencing problems in the form of product defects that exceed the company's standard, which is 1%. By using the DMAIC Six Sigma Statistical tool (Define, Measure, Analyze, Improve, and Control), it is possible to evaluate the possibility of failure of the production system so that the cause of each product defect can be identified and get the right problem-solving solution and with Failure Mode Effects Mode can be known the solutions for the priority problems. From the search results, it can be seen that liquid products are the products with the most defects, with the causes of defects caused by errors in work procedures and the use of old machines. From the improvement results, it was found that the level of product defects decreased from 2,26% to 0,93% or in sigma level increase from 4,18 to 4,46.

1. Introduction

Global economic progress impacts all fields, including the pharmaceutical industry in Indonesia. Manufacturers are required to create quality, safe and valuable medicinal products. For this reason, the pharmaceutical industry in Indonesia needs to implement quality control to ensure that consumers get medicinal products of the desired quality. Quality is a dynamic condition associated with products, people or labor, processes and tasks, and environmental changes that meet or exceed consumer expectations [1-4].

PT KAEF is a pharmaceutical company in Indonesia that focuses on the pharmaceutical industry. Currently, PT KAEF is a very influential producer of prescription and non-prescription products in the national market, and at current condition is experiencing problems related to quality. Difficulties that arise in the production process need to be improved in quality to reduce product defects. Production data shows that a product defect causes the company's target not to be achieved. The production data of the number defects product is presented in Table 1.

Table 1. Defect rate average.

No	Product	Jul	Aug	Sep	Oct	Nov	Dec	Defect Rate
1	Liquid	2,82	2,50	2,23	2,18	1,76	2,07	2,26
2	Dry Syrup	0,52	0,50	0,53	0,54	0,55	0,60	0,54
3	Capsule	0,53	0,54	0,55	0,56	0,54	0,52	0,54



Content from this work may be used under the terms of the Creative Commons Attribution 3.0 licence. Any further distribution of this work must maintain attribution to the author(s) and the title of the work, journal citation and DOI.

It can be seen in table 1 above that the percentage of defects is more than the company standard, which is 1%. It can be described as a liquid product with a 2.26% defect, 0.54% dry syrup product, and 0.54% capsule. The level of defect will affect its competitiveness. Therefore, companies should strive to control the process and product quality as much as possible to reduce the defect rate. Quality control can be carried out in various ways, including statistical and other methods [5]. There are variations in the manufacturing process that can affect the quality of the product you make. Therefore, these fluctuations need to be reduced [6].

2. Research Methodology

This study aims to resolve the causes of quality problems that occur in PT. KAEF. The following are descriptions of the research methods in this study.

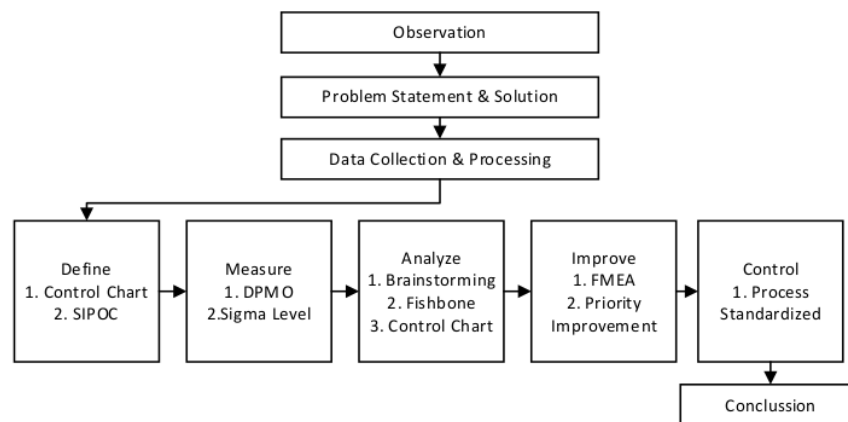


Figure 1. Research framework.

Observation is used to observe the actual conditions that occur so that the problem statement can be determined. If the cause of the problem is known, it can be easier to provide alternative solutions to the problem. Data processing to find out how to control and improve the quality of liquid products that are still below the company's standard provisions. The data processing stage described using the DMAIC stages, namely Define, Measure, Analyze, Improvement, and Control [7-10]. The following is a description of each stage:

- DMAIC (Define, Measure, Analyze, Improve, Control) to optimize quality applied to the production department.
- FMEA (Failure Mode and Effect Analysis) to identify the causes of failure/defects thoroughly accompanied by numerical weighting to determine the effects that need to be prioritized for improvement. The analysis is used to compare the results of improvements that have been improved, namely the current condition with the company's target [11-13]. Improvements are monitored continuously to reduce product defects at PT KAEF.

Conclusions and Suggestions are the last stages of this research. Conclusions are drawn from the results of problem-solving that are in line with the research objectives. From the results of this study, this research can give suggestions that help to be followed up for the benefit of the company and the improvement of further research.

3. Results and Discussion

The production process for liquid product starts from the input of raw materials to become products and is explained with an operation process chart map as follows in Figure 2.

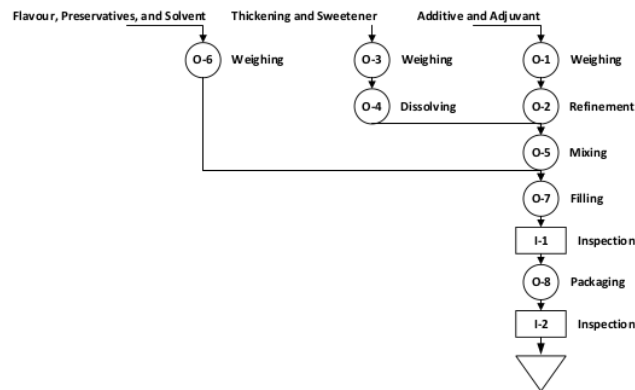


Figure 2. OPC for liquid products.

3.1. Define Stage

Based on Table 1, it can be seen that the highest percentage of defects is in liquid products. To identify critical causes of defects that occur, CTQ is used, which is a factor of the process that directly impacts achieving the desired quality. Based on observations at PT. KAEF, the CTQ factor that occurs can be seen in Table 2.

Table 2. Critical to quality.

No	Defects	Number Of Defect	% Defect
1	Damaged Physical Packaging	866	59.03
2	Lack Of Completeness Of Contents	271	18.47
3	Incorrect Coding	193	13.16
4	Mix -Ups	91	6.20
5	Incorrect Labeling	37	2.52
6	Contamination	9	0.61
	Total	1467	100.00

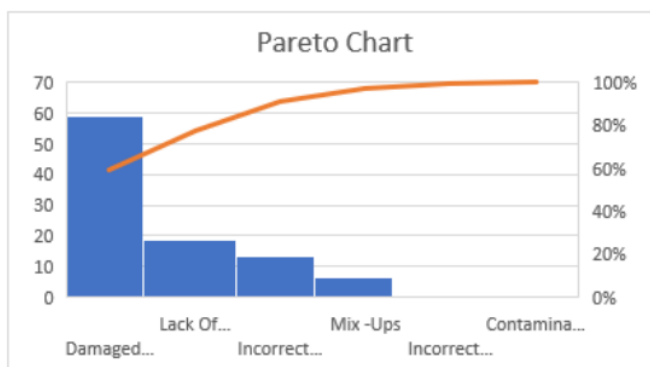


Figure 3. Pareto diagram.

Based on the Pareto chart as shown in figure 3, the biggest problem with damaged physically packaging has the highest level of product defects. Therefore, the problem taken is repairing the physical imperfections of damaged packaging.

3.1.1. SIPOC Diagram (Supplier, Input, Process, Output, Customer)

The SIPOC diagram was created better to understand the process from the supplier to the customer. The following is a SIPOC diagram for the production of liquid products.

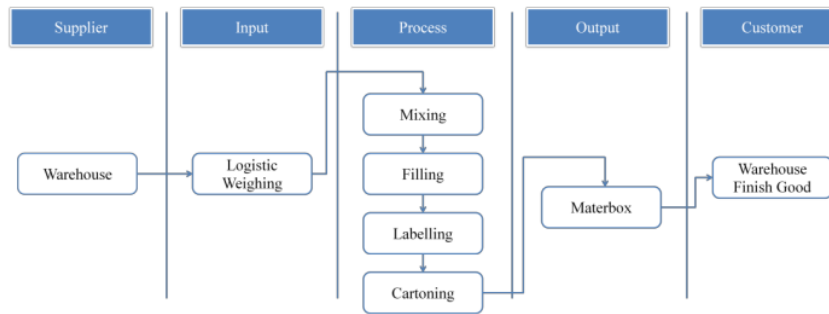


Figure 4. SIPOC diagram.

The explanation in the figure 4 is a) Suppliers provide the resources or materials needed by the company to produce goods in the form of drugs from the warehouse, b) Inputs are materials and/or resources provided by suppliers to be transformed in the production process, c) Process is a series of actions and activities that convert materials (active substances and additives) into liquid drug preparations through processes, namely Mixing, Filling, Labeling, and Cartoning, d) Output in the form of drugs produced by the production process to be ready for distribution to customers in master box packaging, e) Customers (customers) or downstream processes that receive the output from the accepted process to the well-finished warehouse (finished drug warehouse), which is ready to be handed over to the distributor, namely the pharmaceutical wholesaler company.

3.2 Measure Stage

3.2.1 Process Capability Analysis

To predict how consistently the process meets the specifications determined by the company, the calculation of process analysis capability can be known. Then the calculation of production analysis capability is:

$$\bar{P} = \frac{\text{Total defect}}{\text{Total production}} \quad (1)$$

$$= \frac{1467}{65000} = 0,023 \quad (2)$$

$$Cp = 1 - \bar{P} \quad (3)$$

$$= 1 - 0,023 = 0,977 \quad (4)$$

From the calculation above, the Cp value is 0.977, which means the ability of the liquid production process to produce a standard production process is 97.7%.

3.2.2 DPMO and SQL

Defect Per Million Opportunity (DPMO) is a measure that shows defects per million opportunities, while Sigma Quality Level (SQL) offers a sigma value that describes the level of process performance. The calculation begins by finding the Defect Per Unit (DPU) value first by using the formula:

$$DPU = \frac{\text{Defect}}{\text{Sampling unit}} \quad (5)$$

$$DPO = \frac{DPU}{\text{Total CTQ}} \quad (6)$$

$$DPMO = DPU \times 1.000.000 \quad (7)$$

$$\text{Sigma Level} = (\text{NORMSINV}(1 - \text{DPMO})) + 1,5 \tag{8}$$

Table 3. Sigma level for liquid products.

Month	Jul	Aug	Sep	Okt	Nov	Des	Total	Average
Sampling Unit	10500	11500	10500	11000	11500	10000	65000	10833
Damaged Physical Packaging Lack Of Completeness Of Contents								144
Incorrect Coding	161	174	160	144	112	115	866	
Mix -Ups	60	49	35	42	41	44	271	45
Incorrect Labeling	49	28	19	38	32	27	193	32
Contamination	18	21	13	10	13	16	91	15
Defect	7	13	6	5	2	4	37	6
% Defect	1	3	1	1	2	1	9	2
DPU	296	288	234	240	202	207	1467	244,50
DPO	2,82	2,50	2,23	2,18	1,76	2,07	13,56	2,26
DPMO	0,03	0,03	0,02	0,02	0,02	0,02	0,14	0,02
Sigma Level	0,00	0,00	0,00	0,00	0,00	0,00	0,02	0,01
	4698	4174	3714	3636	2928	3450	22600,51	3766,75
	4,10	4,14	4,18	4,18	4,26	4,20	25,05	4,18

Based on table 3 above, it can be seen that the average DPMO value of the liquid product is 3766,75, meaning that for every one million products produced, there are 3766,75 possible defects in the product. In comparison, the average sigma level is 4.18.

3.3. Analyze Stage

The third stage of the DMAIC concept is the analysis stage. The analysis process is carried out using Pareto diagrams and fishbone diagrams. The primary purpose of the analysis stage is to find the main focus of the repair process as well as find the root cause of several types of defects that occur in the repair process.

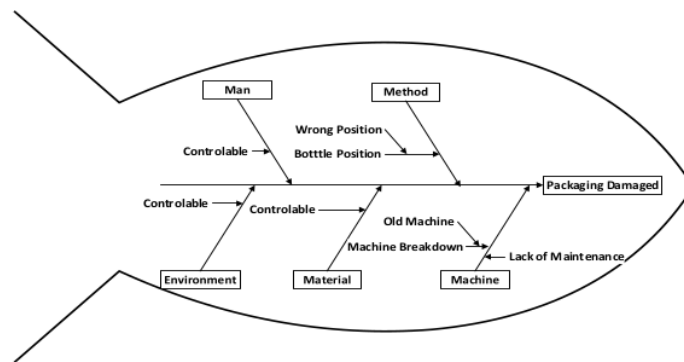


Figure 5. Fishbone diagram.

In Figure 5, there are three identifications of the causes of physical failure of damaged packaging in the method, namely not carrying out regular machine maintenance, improper placement of bottles and

in the machine, namely the age of the device is old. In this case, it is necessary to improve the defect rate so that the company's target is achieved.

3.2. Improvement Stage

Failure Mode and Effect Analysis (FMEA) is used to determine the priority of repair after the cause of the error in the production process is known. Based on the data collection made, the next step is to create an FMEA table that provides value weighting using Severity, Occurrence, and Detection to generate a Risk Priority Number (RPN) value.

3.4.1. Determine the level of seriousness that occurs (Severity)

The severity of the effect is described on a scale of 1-10. The higher the ranking, the more serious the impact. The severity value of the resulting consequences can be seen in Table 4.

Table 4. RPN value of CTQ.

Potential Failure Modes	Potential Effect (S) Of Failures	SEV	OCC	DET	RPN	Rank
Packaging Damaged	Wrong Bottle Position	7	6	7	294	1
	Lack of Maintenance	7	4	8	224	3
	Obsolote Machine	6	5	8	240	2

3.4.2. FMEA Analysis

Based on data processing results using FMEA, the highest RPN value in the physical defect of damaged packaging is inappropriate bottle placement. The bottle is in the wrong position with a value of 294. This is because no supervision makes workers negligent in placing bottles in the filling machine. There are bottle placement problems shifted. Therefore, the resulting product produces failures such as physically damaged packaging. Lack of maintenance can also happen because of no preventive maintenance, so that that machine will be damaged frequently. The machine that PT. KAEF uses dominated with the old machine and needs more attention about their part. After we know the potential effect of failure, then we can make an action plan.

Action Planning for Failure Modes is made to determine the most appropriate action that has a high risk of failure. The data used are the results that have been obtained from the Failure Modes and Effects Analysis (FMEA) analysis by looking at the order of the highest RPN to be given attention. Furthermore, appropriate solutions are made to eliminate the root cause of the problem. Action Planning for Failure Modes table for dimensional defect problems can be seen in Table 5.

Table 5. Action planning for failure modes.

Rank	Actionable Cause	Potensial Solutions	Design Validation
1	Lack of Supervision by the Head of Section	The Head of the Production Department must carry out regular supervision and create a work appraisal system for operators	Employee Work Report
2	No Sparepart	Analysis and Making of Spare Parts Every 6 Months	Sparepart Using Data
3	Lack of Maintenance Schedule	All Company Employees Perform Preventive Maintenance Every 3 Months By Cleaning And Performing Routine Inspections, Making Schedules To Perform Machine Maintenance	Maintenance Schedule Logbook Filling

Improvements made based on these solutions are expected to increase the value of process sigma, which is used as a benchmark for process quality to produce quality products. In general, the

improvement of the above matters will improve the performance of the liquid preparation production process.

Table 6. Estimation improvement result.

Month	Jul	Aug	Sep	Okt	Nov	Des	Total	Average
Sampling Unit	10500	11500	10500	11000	11500	10000	65000	10833
Damaged Physical Packaging Lack Of	0	0	0	0	0	0	0	0
Completeness Of Contents	60	49	35	42	41	44	271	45
Incorrect Coding	49	28	19	38	32	27	193	32
Mix -Ups	18	21	13	10	13	16	91	15
Incorrect Labeling	7	13	6	5	2	4	37	6
Contamination	1	3	1	1	2	1	9	2
Defect	135	114	74	96	90	92	601	100,17
% Defect	1,29	0,99	0,70	0,87	0,78	0,92	5,56	0,93
DPU	0,01	0,01	0,01	0,01	0,01	0,01	0,06	0,01
DPO	0,00	0,00	0,00	0,00	0,00	0,00	0,01	0,01
DPMO	2143	1652	1175	1455	1304	1533	9262	1543,64
Sigma Level	4,36	4,44	4,54	4,48	4,51	4,46	26,78	4,46

3.5 Comparison of current conditions with proposed conditions

Evaluation of the repair activities carried out to see how much effect the results of these improvements can be proven by comparing the results of the repairs with the results before the repairs.

Table 7. Comparison current and improvement condition.

Month	Jul	Aug	Sep	Okt	Nov	Des	% Defect	Sigma Level
Before Improvement	2,82	2,50	2,23	2,18	1,76	2,07	2,26	4,18
After Improvement	1,29	0,99	0,70	0,87	0,78	0,92	0,93	4,46

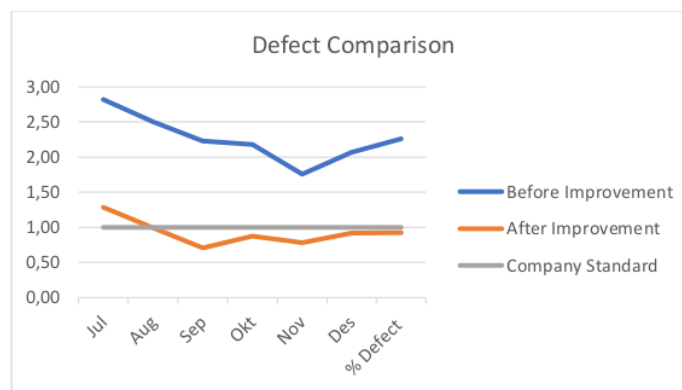


Figure 6. Defect comparison.

Figure 6 described about comparison of current condition with repair condition. Evaluation of the repair activities carried out to see how much effect the results of these improvements can be proven by comparing the results of the repairs with the results before the repairs.

It can be seen from table 7, the comparison between the future sigma value and the current sigma value can increase the sigma value in the following way: Make employee performance reports by assessing whether the operator has followed the work instructions that have been made. There is a checklist for using spare parts data to facilitate monitoring of the availability of spare parts to be used. The machine can produce optimal performance by performing preventive maintenance, and a machine maintenance schedule logbook can prove machine monitoring. To prevent mix-ups, employees are given training and referrals scheduled by the PGA section on the characteristics of pharmaceutical preparations. SOP for attaching identity labels correctly and adequately to prevent inappropriate material taking is helpful to avoid mix-ups during the production process. Supervisors and employees care about others to improve the quality of the production process by making routine check schedules to verify each stage of the production process. With a label indicating a ready-to-use line, every employee does not feel confused or wrong in working, aiming to avoid contamination of the products to be produced.

3.6 Control Stage

At the control stage, namely monitoring the repaired processes to determine whether the improvements were correctly implemented or not, if the control remains stable within the specified limits, then the control stage is running well. The results have been made work standards by making standard operating procedures (SOP) and work instructions (WI).

The placement of the bottle is not appropriate, so that the bottle is in the wrong position, the working standard is made as follows.

Work Instructions For Placing Bottles Ready For Filling				
Document Number	Effective Date	Revision	Work Instruction	Page
SOP-1/1	1 Augustus 2021		Filling	1
Description				
1. Clear Bottles Are Placed In A Predetermined Area With An Identity Label Marking				
2. Insert The Clear Bottle Into The Bottle Blowing Machine In A Way That It Should Not Be Inserted In A Crossed State Or Through The Conveyor				
3. Bottle Blowing Machine Is Filled According To Predetermined Limits (Following The Predetermined Limit Line)				
4. The Operator Carefully Follows The Bottle Placement Process And Ensures The Bottle Is In Perfect Condition				
Sign:				

Figure 7. Work instructions for placing bottles.

The age of the machine is old, the engineering section makes a checklist of data on the use of spare parts as follows:

No.	Sparepart	Total	Remains	Taken By	Sign	PIC Sign
1	Sprocket Filling Machine	5				
2	Sprocket Mixing Machine	3				
3	Ruber	4				
4						
5						
6						

Figure 8. Checklist of spare parts usage.

Periodic maintenance is not carried out, by filling out a logbook that can be verified, it will monitor machine maintenance periodically, such as the following logbook:

No.	Machine	No. Seri	Duration (hrs)	Maintenance date	Using Date	Using For Products	No. Batch	Sign
1	Filling	SN5212	4	20 July 2021	21 July 2021	123	A12	V
2	Mixing	SN6370	4	21 July 2021	22 July 2021	123	A15	V
3	Cartooning	SN7344	3	24 July 2021	25 July 2021	123	A15	V
4	Filling	SN5212	4	1 Agustus 2021	2 Agustus 2021	123	A17	V
5	Mixing	SN6370	4	2 Agustus 2021	3 Agustus 2021	123	A20	V
6	Cartooning	SN7344	3	10 Agustus 2021	11 Agustus 2021	123	A21	V
7								
8								

Figure 9. Maintenance machine logbook.

4. Conclusion

Based on the results of data processing and analysis that has been done regarding this research, it can be concluded that:

With the improvement, the quality of liquid products increases, and the condition after modification exceeds the company's target, which can be proven by the company's sigma value of 4.18-sigma to 4.46-sigma. The causes of disability are caused by the placement of the bottle is not appropriate so that the bottle is in the wrong position, the machine is old, no periodic maintenance, and no routine check schedule so operators are negligent in their work.

Suggestions for improvements to make are calculating spare parts needed every three months, preventive maintenance every month, making bottle placement work instructions, making spare parts and inventories checklists, making machine usage logbooks, conducting training and refreshment for all production employees, and making ready-to-use line labels.

Acknowledgement

This work is supported by the Engineering Faculty Bhayangkara Jakarta Raya University and the Directorate of Research and Community Service. The authors also express gratitude to Departement Industrial Engineering for providing opportunities for growth through new and valuable research activities.

References

- [1] Morgan J and Liker J 2006 Toyota Product Development System *Productivity Press. New York*
- [2] Gasparsz V 2019 Total Quality Management *Gramedia Pustaka Utama. Jakarta*

- [3] Gasperz V 2015 All-In-One Management Toolbook *Gramedia Pustaka Utama. Bogor*
- [4] Montororing Y D R & Nurprihatin F 2021 Model of Quality Control Station Allocation With Consider Work In Process, and Defect Probability Of Final Product *IOP Conference Series: Journal of Physics* vol **1811** (IOP Publishing Ltd)
- [5] Montgomery, Douglas C 2019 Introduction to Statistical Quality Control 8th Edition. *Jhon Wiley and Sons, Inc. United States.*
- [6] Gaspersz V and Vontana A 2011 Lean Six Sigma for Manufacturing and Service Industries *Vinchrsto Publication Bogor*
- [7] Pande P S, Neuman R P, and Cavanagh R R 2013 The Six Sigma Way: How to Maximize the Impact of Your Change and Improvement Efforts 2nd *Mcgraw Hill* New York
- [8] Evan J R and Lindsay W M 2015 An Introduction To Six Sigma And Process Improvement. *Cengage Learning* Australia
- [9] Pande S P, Neuman R P, and Cavanagh R R 2007 The Six sigma Way: How GE, Motorola, and other Top Companies are Honing Their Performance *McGraw-Hill* New York
- [10] Afifah 2010 Define, Measure, Analyze, Improve dan Control *Jurnal PASTI IX(3)* 248–256
- [11] McDermott R E 2009 The Basic of FMEA. 2nd Ed *CRC Press* United States
- [12] McDermott R E, Mikulak R J and Beauregard M R 2009 The basic of FMEA 2nd Ed *Taylor and Francis Group* New York
- [13] Chrysler 2008 Potential Failure Mode and Effect Analysis (FMEA) 4th Edition *Ford Motor Company and General Motors Corporation*

Production process improvements to minimize product defects using DMAIC six sigma statistical tool and FMEA at PT KAEF

ORIGINALITY REPORT

9%

SIMILARITY INDEX

8%

INTERNET SOURCES

2%

PUBLICATIONS

4%

STUDENT PAPERS

PRIMARY SOURCES

1	elib.usma.ru Internet Source	2%
2	staffnew.uny.ac.id Internet Source	1%
3	www.coursehero.com Internet Source	1%
4	Submitted to Universitas Muhammadiyah Ponorogo Student Paper	1%
5	stkippgri-situbondo.ac.id Internet Source	1%
6	Submitted to Universitas Islam Indonesia Student Paper	1%
7	www.scitepress.org Internet Source	1%
8	ndl.ethernet.edu.et Internet Source	<1%

9	openresearch.lsbu.ac.uk Internet Source	<1 %
10	media.neliti.com Internet Source	<1 %
11	Yung-Tsan Jou, Riana Magdalena Silitonga, Ming-Chang Lin, Ronald Sukwadi, Jovian Rivaldo. "Application of Six Sigma Methodology in an Automotive Manufacturing Company: A Case Study", Sustainability, 2022 Publication	<1 %
12	edoc.pub Internet Source	<1 %
13	eprints.uty.ac.id Internet Source	<1 %
14	turkjphysiotherrehabil.org Internet Source	<1 %
15	www.mdpi.com Internet Source	<1 %
16	www.scilit.net Internet Source	<1 %

Exclude quotes On

Exclude matches Off

Exclude bibliography On

[< Back to results](#) | 1 of 1[Download](#) [Print](#) [Save to PDF](#) [Save to list](#) [Create bibliography](#)

Journal of Physics: Conference Series • Open Access • Volume 2157, Issue 1 • 17 January 2022 • Article number 012032 • 5th International Conference on Combinatorics, Graph Theory, and Network Topology, ICCGANT 2021 • Jember • 21 August 2021 through 22 August 2021 • Code 176742

Document type

Conference Paper • Gold Open Access

Source type

Conference Proceedings

ISSN

17426588

DOI

10.1088/1742-6596/2157/1/012032

[View more](#)

Production process improvements to minimize product defects using DMAIC six sigma statistical tool and FMEA at PT KAEF

[Monororing, Yuri Delano Regent](#) ; [Widyantoro, Murwan](#); [Muhazir, Achmad](#)[Save all to author list](#)^a Departement of Industrial Engineering, Faculty of Engineering, Bhayangkara Jakarta Raya University, Indonesia197th percentile
Citation in Scopus3.93
FWCI 104
Views count [View all metrics](#) [View PDF](#) [Full text options](#) [Export](#) [Abstract](#)[Indexed keywords](#)[Sustainable Development Goals 2023](#)[SciVal Topics](#)[Metrics](#)[Funding details](#)**Abstract**

PT KAEF is one of the pharmaceutical manufacturing industries in Indonesia that produces various kinds of drug variants. Currently, PT KAEF is experiencing problems in the form of product defects that exceed the company's standard, which is 1%. By using the DMAIC Six Sigma Statistical tool (Define,

Cited by 1 document

MODEL OF INVENTORY PLANNING USING MONTE CARLO SIMULATION IN RETAIL SUPERMARKET WITH CONSIDER TO COMPETITORS AND STIMULUS STRATEGIES

Monororing, Y.D.R. , Widyantoro, M. (2022) *Journal of Applied Engineering and Technological Science*

[View details of this citation](#)

Inform me when this document is cited in Scopus:

[Set citation alert >](#)**Related documents**

Process redesign to reduce stocks of obsolete parts in automotive industry

Lasca, E. , Lasca, F.D. , Stinga, F. (2020) *Quality - Access to Success*

Achieving customer specifications through process improvement using Six Sigma: Case study of NutriSoil - Portugal

Baía, A.P. (2015) *Quality Management Journal*

Design of Flat Shoes Quality Control System using PDCA (Case Study at PT DAT)

Sari, D.K. , Hetharia, D. , Saraswati, D. (2019) *IOP Conference Series: Materials Science and Engineering*



[View all related documents based on references](#)

Find more related documents in Scopus based on:

[Authors](#) [Keywords](#)

Measure, Analyze, Improve, and Control), it is possible to evaluate the possibility of failure of the production system so that the cause of each product defect can be identified and get the right problem-solving solution and with Failure Mode Effects Mode can be known the solutions for the priority problems. From the search results, it can be seen that liquid products are the products with the most defects, with the causes of defects caused by errors in work procedures and the use of old machines. From the improvement results, it was found that the level of product defects decreased from 2,26% to 0,93% or in sigma level increase from 4,18 to 4,46. © 2022 Institute of Physics Publishing. All rights reserved.

Indexed keywords 

Sustainable Development Goals 2023  New 

SciVal Topics  


Metrics 

Funding details 

References (13)

[View in search results format >](#)

All

[CSV export](#)  [Print](#) [E-mail](#) [Save to PDF](#)

[Create bibliography](#)

1 Morgan, J, Liker, J
(2006) *Toyota Product Development System Productivity Press*. Cited 2 times.
New York

2 Gaspersz, V
(2019) *Total Quality Management Gramedia Pustaka Utama*
Jakarta

3 Gasperz, V
(2015) *All-In-One Management Toolbook Gramedia Pustaka Utama*
Bogor

4 Montororing, Y D R, Nurprihatin, F
Model of Quality Control Station Allocation With Consider Work In Process,
and Defect Probability Of Final Product IOP Conference Series
(2021) *Journal of Physics*, 1811.
(IOP Publishing Ltd)

5 Montgomery, Douglas C
(2019) *Introduction to Statistical Quality Control 8th Edition*. Cited 9039
times.
Jhon Wiley and Sons, Inc. United States

- 6 Gaspersz, V, Vontana, A
(2011) *Lean Six Sigma for Manufacturing and Service Industries* Vinchristo Publication Bogor

- 7 Pande, P S, Neuman, R P, Cavanagh, R R
(2013) *The Six Sigma Way: How to Maximize the Impact of Your Change and Improvement Efforts*. Cited 13 times.
2nd Mcgraw Hill New York

- 8 Evan, J R, Lindsay, W M
(2015) *An Introduction To Six Sigma And Process Improvement*. Cited 85 times.
Cengage Learning Australia

- 9 Pande, S P, Neuman, R P, Cavanagh, R R
(2007) *The Six sigma Way: How GE, Motorola, and other Top Companies are Honing Their Performance*. Cited 1050 times.
McGraw-Hill New York

- 10 Afifah
Define, Measure, Analyze
(2010) *Improve dan Control Jurnal PASTI*, IX (3), pp. 248-256.

- 11 McDermott, R E
(2009) *The Basic of FMEA*. Cited 482 times.
2nd Ed CRC Press United States

- 12 McDermott, R E, Mikulak, R J, Beauregard, M R
(2009) *The basic of FMEA 2nd Ed Taylor and Francis Group New York*

- 13 (2008) *Potential Failure Mode and Effect Analysis (FMEA) 4th Edition Ford Motor Company and General Motors Corporation*

👤 Monitoring, Y.D.R.; Departement of Industrial Engineering, Faculty of Engineering, Bhayangkara Jakarta Raya University, Indonesia;
email:yuri.delano@dsn.ubharajaya.ac.id
© Copyright 2022 Elsevier B.V., All rights reserved.

About Scopus

[What is Scopus](#)

[Content coverage](#)

[Scopus blog](#)

[Scopus API](#)

[Privacy matters](#)

Language

[日本語版を表示する](#)

[查看简体中文版本](#)

[查看繁體中文版本](#)

[Просмотр версии на русском языке](#)

Customer Service

[Help](#)

[Tutorials](#)

[Contact us](#)

ELSEVIER

[Terms and conditions](#) ↗ [Privacy policy](#) ↗

Copyright © Elsevier B.V. ↗. All rights reserved. Scopus® is a registered trademark of Elsevier B.V.

We use cookies to help provide and enhance our service and tailor content. By continuing, you agree to the use of cookies ↗.





journal of physics conference series

1 - 1 of 1

Journal of Physics: Conference Series

United Kingdom
IOP Publishing Ltd.

1 - 1 of 1

Developed by:



Powered by:



Follow us on @ScimagoJR

Scimago Lab, Copyright 2007-2022. Data Source: Scopus®

EST MODUS IN REBUS

Horatio (Satire 1, 1, 106)

Cookie settings

Cookie policy

ICCGANT 2021

The 5th International Conference on Combinatorics,
Graph Theory, and Network Topology
CGANT - UNIVERSITY OF JEMBER
21st - 22nd August 2021

REVIEW FORM CONTENT

Paper ID : 50

Paper Title : Production process improvements to minimize product defects using DMAIC six sigma statistical tool and FMEA at PT. KAEF

Clear Partially Not Clear

The title reflects the content and purpose of the research	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
The abstract contains summarize of the paper content	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
The introduction clearly explains state of the art of research	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
The purpose and objective of the work are clearly stated	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
The novelty is clearly defined	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
The methodology is clearly described	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
The data are well presented	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
The results are well presented based on the data analysis	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
The discussion are well reflected based on results and references	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
The conclusion answered the problem in the research	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Are the suggestions meaningful, valid, and based on the findings?	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Are the references adequate relevant and based on recent journals?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Is cohesion achieved throughout the article?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Is the work contributing to the field?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Evaluation

3 Strong Accept	2 Accept	1 Weak Accept	0 Borderline Paper	-1 Weak Reject	-2 Reject	-3 Strong Reject
-----------------------	-------------	---------------------	--------------------------	-------------------	--------------	------------------------

Suggestions

Title	-
Abstract	-
Introduction	<i>Page 1:</i> Please make sure that all references are cited in the introduction and make sure that introduction clearly explains state of the art of research and also define the novelty clearly.
Method	-

ICCGANT 2021

The 5th International Conference on Combinatorics,
Graph Theory, and Network Topology
CGANT - UNIVERSITY OF JEMBER
21st - 22nd August 2021

Result and Discussion	<i>Page 3:</i> Please make sure that all resulting tables or figures are explained and discussed clearly. The discussion includes answering the research problem, comparing it with relevant research results, stating the importance of the findings, and explaining the novelty.
Conclusion	<i>Page 10:</i> Please make sure the Conclusions should answer the research problem or objective and state the importance of the findings and their implications. Then state the limitations of the study conducted and state further research as the open problems.
References	-

ICCGANT 2021

The 5th International Conference on Combinatorics,
Graph Theory, and Network Topology
CGANT - UNIVERSITY OF JEMBER
21st - 22nd August 2021

REVIEW FORM ARTICLE FORMAT

Paper ID : 50

Paper Title : Production process improvements to minimize product defects using DMAIC six sigma statistical tool and FMEA At PT. KAEF

	Clear	Partially	Not Clear
Title and Abstract	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Abstract	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Introduction	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Research Methods	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Result and Discussion	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Conclusion	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Acknowledgment	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Structure of References	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Citation of all References	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Table, Figures, and Formula	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

REFEREE REPORT

Title	-
Abstract	-
Introduction	-
Research Methods	-
Conclusion	-
Acknowledgment	Please see the JOP template to make sure.
Structure of References	-
Citation of all References	-
Table, Figures, and Formula	-

ICCGANT 2021

The 5th International Conference on Combinatorics,
Graph Theory, and Network Topology
CGANT - UNIVERSITY OF JEMBER
21st - 22nd August 2021

LANGUAGE REVIEW FORM

Paper ID : paper 50

Paper Title :

Production process improvements to minimize productdefects using DMAIC six sigma statistical tool and FMEAAt PT. KAEF

Rate the paper based on these following details.

	Yes	Partially	No
Has the paper showcased effective sentence formation?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Have the sentences in this paper used correct tenses?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Has this paper showcased appropriate use of word choices?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Has this paper showcased appropriate use of discourse markers?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Have the sentences in this paper utilized proper punctuation?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Has this paper showcased smooth transitions of ideas from the beginning to the ending?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Has this paper been grammatically accurate?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Has this sentence showcased appropriate use of words or word forms?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Do the lexical and grammatical features create clear meanings?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Is the language clear and understandable?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Additional Evaluation and Additional Comments:

Most parts of this paper have been written clearly in good English. However, there are SOME grammatical inaccuracies in this paper (please check the yellow highlight and comments in your text). Please revise accordingly to improve the quality of your paper.