



[HOME](#) / [ARCHIVES](#) / [VOL. 13 NO. 3 \(2024\)](#) / [Articles](#)

Network Intrusion Detection Using Transformer Models and Natural Language Processing for Enhanced Web Application Attack Detection

Wowon Priatna

Universitas Bhayangkara Jakarta Raya

Irwan Sembiring

Universitas Kristen Satya Wacana

Adi Setiawan

Universitas Kristen Satya Wacana

Iwan Setyawan

Universitas Kristen Satya Wacana

DOI: <https://doi.org/10.23887/janapati.v13i3.82462>

Keywords: NLP, intrusion detection, transformer, machine learning, web application attack

ABSTRACT

The increasing frequency and complexity of web application attacks necessitate more advanced detection methods. This research explores integrating Transformer models and Natural Language Processing (NLP) techniques to enhance network intrusion detection systems (NIDS). Traditional NIDS often rely on predefined signatures and rules, limiting their effectiveness against new attacks. By leveraging the Transformer's ability to capture long-term dependencies and the contextual richness of NLP, this study aims to develop a more adaptive and intelligent intrusion detection framework. Utilizing the CSIC 2010 dataset, comprehensive preprocessing steps such as tokenization, stemming, lemmatization, and normalization were applied. Techniques like Word2Vec, BERT, and TF-IDF were used for text representation, followed by the application of

the Transformer architecture. Performance evaluation using accuracy, precision, recall, F1 score, and AUC demonstrated the superiority of the Transformer-NLP model over traditional machine learning methods. Statistical validation through Friedman and T-tests confirmed the model's robustness and practical significance. Despite promising results, limitations include the dataset's scope, computational complexity, and the need for further research to generalize the model to other types of network attacks. This study indicates significant improvements in detecting complex web application attacks, reducing false positives, and enhancing overall security, making it a viable solution for addressing increasingly sophisticated cybersecurity threats

REFERENCES

- A. A. Bouramdane, "Cyberattacks in Smart Grids: Challenges and Solving the Multi-Criteria Decision-Making for Cybersecurity Options, Including Ones That Incorporate Artificial Intelligence, Using an Analytical Hierarchy Process," *J. Cybersecurity Priv.*, vol. 3, no. 4, pp. 662–705, 2023, doi: 10.3390/jcp3040031.
- J. A. Dharma and Rino, "Network Attack Detection Using Intrusion Detection System Utilizing Snort Based on Telegram," *bit-Tech*, vol. 6, no. 2, pp. 118–126, 2023, doi: 10.32877/bt.v6i2.943.
- O. J. Falana, I. O. Ebo, C. O. Tinubu, O. A. Adejimi, and A. Ntuk, "Detection of Cross-Site Scripting Attacks using Dynamic Analysis and Fuzzy Inference System," 2020 Int. Conf. Math. Comput. Eng. Comput. Sci. ICMCECS 2020, 2020, doi: 10.1109/ICMCECS47690.2020.240871.
- P. Dini, A. Elhanashi, A. Begni, S. Saponara, Q. Zheng, and K. Gasmi, "Overview on Intrusion Detection Systems Design Exploiting Machine Learning for Networking Cybersecurity," *Appl. Sci.*, vol. 13, no. 13, 2023, doi: 10.3390/app13137507.
- N. Agarwal and S. Z. Hussain, "A Closer Look at Intrusion Detection System for Web Applications," *Secur. Commun. Networks*, vol. 2018, 2018, doi: 10.1155/2018/9601357.
- Y. J. Park and J. C. Park, "Web Application Intrusion Detection System for input validation attack," *Proc. - 3rd Int. Conf. Converg. Hybrid Inf. Technol. ICCIT 2008*, vol. 2, pp. 498–504, 2008, doi: 10.1109/ICCIT.2008.338.
- S. Sasipriya, L. R. Madhan Kumar, R. Raghuram Krishnan, and K. Naveen Kumar, "Intrusion Detection System in Web Applications (IDSWA)," *Proc. - 5th Int. Conf. Intell. Comput. Control Syst. ICICCS 2021*, no. Icciccs, pp. 311–314, 2021, doi: 10.1109/ICICCS51141.2021.9432086.
- M. Verkerken, L. D'hooge, T. Wauters, B. Volckaert, and F. De Turck, "Towards Model Generalization for Intrusion Detection: Unsupervised Machine Learning Techniques," *J. Netw. Syst. Manag.*, vol. 30, no. 1, pp. 1–

25, 2022, doi: 10.1007/s10922-021-09615-7.

L. Ashiku and C. Dagli, "Network Intrusion Detection System using Deep Learning," *Procedia Comput. Sci.*, vol. 185, no. June, pp. 239–247, 2021, doi: 10.1016/j.procs.2021.05.025.

R. Sudiyarno, A. Setyanto, and E. T. Luthfi, "Peningkatan Performa Pendeteksian Anomali Menggunakan Ensemble Learning dan Feature Selection Anomaly Detection Performance Improvement Using Ensemble Learning and Feature Selection," *Citec J.*, vol. 7, no. 1, pp. 1–9, 2020.

S. Das, M. Ashrafuzzaman, F. T. Sheldon, and S. Shiva, "Network Intrusion Detection using Natural Language Processing and Ensemble Machine Learning," 2020 IEEE Symp. Ser. Comput. Intell. SSCI 2020, no. MI, pp. 829–835, 2020, doi: 10.1109/SSCI47803.2020.9308268.

R. Sujatha, A. Teja, P. Naveen, and J. M. Chatterjee, "Web Application for Traffic Monitoring and Guidance," vol. 10, no. 4, pp. 1–14, 2020, doi: 10.33168/JSMS.2020.0403.

J. R. Tadhani, V. Vekariya, V. Sorathiya, S. Alshathri, and W. El Shafai, "Securing web applications against XSS and SQLi attacks using a novel deep learning approach," *Sci. Rep.*, pp. 1–17, 2024, doi: 10.1038/s41598-023-48845-4.

T. Sowmya and M. A. E. A, "Measurement : Sensors A comprehensive review of AI based intrusion detection system," *Meas. Sensors*, vol. 28, no. May, p. 100827, 2023, doi: 10.1016/j.measen.2023.100827.

J. Campino, "Unleashing the transformers : NLP models detect AI writing in education," *J. Comput. Educ.*, no. 0123456789, 2024, doi: 10.1007/s40692-024-00325-y.

N. Patwardhan, S. Marrone, and C. Sansone, "Transformers in the Real World : A Survey on NLP Applications," 2023.

Z. Long, H. Yan, G. Shen, X. Zhang, H. He, and L. Cheng, "A Transformer-based network intrusion detection approach for cloud security," *J. Cloud Comput.*, vol. 13, no. 1, 2024, doi: 10.1186/s13677-023-00574-9.

Y. Liu and L. Wu, "Intrusion Detection Model Based on Improved Transformer," *Appl. Sci.*, vol. 13, no. 10, 2023, doi: 10.3390/app13106251.

J. Kim, H. Kang, and P. Kang, "Time-series anomaly detection with stacked Transformer representations and 1D convolutional network," *Eng. Appl. Artif. Intell.*, vol. 120, no. November 2022, p. 105964, 2023, doi: 10.1016/j.engappai.2023.105964.

N. Montes, G. Betarte, R. Martínez, and A. Pardo, "Web Application Attacks Detection Using Deep Learning," *Lect. Notes Comput. Sci. (including Subser. Lect. Notes Artif. Intell. Lect. Notes Bioinformatics)*, vol. 12702

LNCS, pp. 227–236, 2021, doi: 10.1007/978-3-030-93420-0_22.

A. D. Y. SURYADI, "Pengembangan Intrusion Detection System (IDS) Berbasis Machine Learning," vol. 13, no. 3, pp. 189–195, 2022, [Online]. Available: <https://repository.mercubuana.ac.id/63488/>.

A. Nurdin, B. Anggo Seno Aji, A. Bustamin, and Z. Abidin, "Perbandingan Kinerja Word Embedding Word2Vec, Glove, Dan Fasttext Pada Klasifikasi Teks," J. Tekno Kompak, vol. 14, no. 2, p. 74, 2020, doi: 10.33365/jtk.v14i2.732.

S. R. Choi and M. Lee, "Transformer Architecture and Attention Mechanisms in Genome Data Analysis: A Comprehensive Review," Biology (Basel), vol. 12, no. 7, 2023, doi: 10.3390/biology12071033.

H. Salih Abdullah and A. Mohsin Abdulazeez, "Detection of SQL Injection Attacks Based on Supervised Machine Learning Algorithms: A Review," Int. J. Informatics, Inf. Syst. Comput. Eng., vol. 5, no. 2, pp. 152–165, 2024, doi: 10.34010/injiiscom.v5i2.12731.

H. Wang and W. Li, "DDosTC: A transformer-based network attack detection hybrid mechanism in SDN," Sensors, vol. 21, no. 15, 2021, doi: 10.3390/s21155047.

Z. Gao, Y. Shi, and S. Li, "Self-attention and long-range relationship capture network for underwater object detection," J. King Saud Univ. - Comput. Inf. Sci., vol. 36, no. 2, p. 101971, 2024, doi: 10.1016/j.jksuci.2024.101971.

H. Kheddar, "Transformers and Large Language Models for Efficient Intrusion Detection Systems : A Comprehensive Survey," pp. 1–34.

H. Zhang and M. O. Shafiq, "Survey of transformers and towards ensemble learning using transformers for natural language processing," J. Big Data, 2024, doi: 10.1186/s40537-023-00842-0.

D. E. Cahyani and I. Patasik, "Performance comparison of TF-IDF and Word2Vec models for emotion text classification," vol. 10, no. 5, pp. 2780–2788, 2021, doi: 10.11591/eei.v10i5.3157.

G. Zachos, I. Essop, G. Mantas, K. Porfyraakis, J. C. Ribeiro, and J. Rodriguez, "An Anomaly-Based Intrusion Detection System for Internet of Medical Things Networks," Electronics, no. June, pp. 1–25, 2021.

A. Aldallal, "Toward Efficient Intrusion Detection System Using Hybrid Deep Learning Approach," Sysmmetry, 2022.

A. Chandra, L. Tünnermann, T. Löfstedt, and R. Gratz, "Transformer-based deep learning for predicting protein properties in the life sciences," Elife, vol. 12, pp. 1–25, 2023, doi: 10.7554/eLife.82819.


T. Lin, Y. Wang, X. Liu, and X. Qiu, "A survey of transformers," *AI Open*, vol. 3, no. October, pp. 111–132, 2022, doi: 10.1016/j.aiopen.2022.10.001.

R. Cao, J. Wang, M. Mao, G. Liu, and C. Jiang, "Feature-wise attention based boosting ensemble method for fraud detection," *Eng. Appl. Artif. Intell.*, vol. 126, no. PC, p. 106975, 2023, doi: 10.1016/j.engappai.2023.106975.

T. S. Lestari, I. Ismaniah, and W. Priatna, "Particle Swarm Optimization for Optimizing Public Service Satisfaction Level Classification," *J. Nas. Pendidik. Tek. Inform.*, vol. 13, no. 1, pp. 147–155, 2024, doi: 10.23887/janapati.v13i1.69612.

J. Liu and Y. Xu, "T-Friedman Test: A New Statistical Test for Multiple Comparison with an Adjustable Conservativeness Measure," *Int. J. Comput. Intell. Syst.*, vol. 15, no. 1, pp. 1–19, 2022, doi: 10.1007/s44196-022-00083-8.

W. Priatna, H. Dwi Purnomo, A. Iriani, I. Sembiring, and T. Wellem, "Optimizing Multilayer Perceptron with Cost-Sensitive Learning for Addressing Class Imbalance in Credit Card Fraud Detection," *Resti*, vol. 8, no. 4, pp. 19–25, 2024.

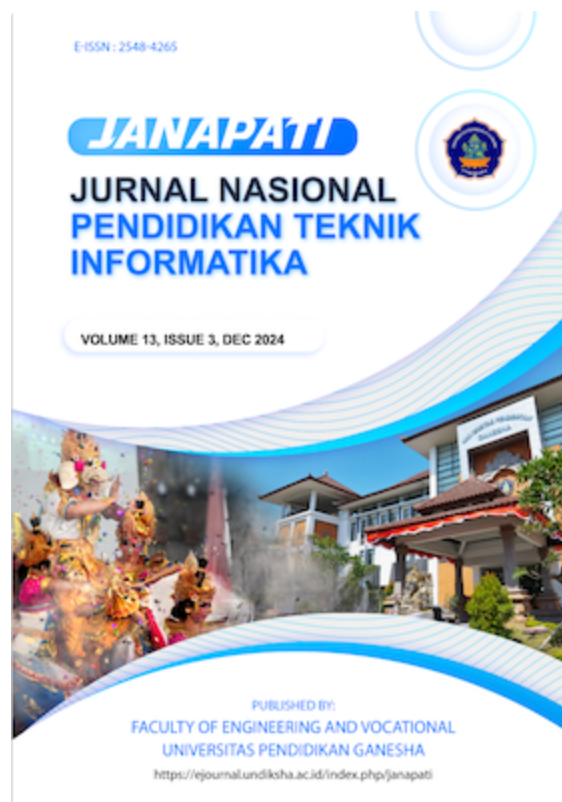

PUBLISHED

2024-12-01

HOW TO CITE

Priatna, W., Sembiring, I. ., Setiawan, A., & Setyawan, I. (2024). Network Intrusion Detection Using Transformer Models and Natural Language Processing for Enhanced Web Application Attack Detection. *Jurnal Nasional Pendidikan Teknik Informatika: JANAPATI*, 13(3), 482–493. <https://doi.org/10.23887/janapati.v13i3.82462>

More Citation Formats

ISSUE

[Vol. 13 No. 3 \(2024\)](#)

SECTION

Articles

LICENSE

Copyright (c) 2024 Wowon Priatna, Irwan Sembiring, Adi Setiawan, Iwan Iwan Setyawan



This work is licensed under a [Creative Commons Attribution-ShareAlike 4.0 International License](#).

Authors who publish with Janapati **agree** to the following terms:

1. Authors retain copyright and grant the journal the right of first publication with the work simultaneously licensed under a [Creative Commons Attribution License \(CC BY-SA 4.0\)](#) that allows others to share the work with an acknowledgment of the work's authorship and initial publication in this journal
2. Authors are able to enter into separate, additional contractual arrangements for the non-exclusive distribution of the journal's published version of the work (e.g., post it to an institutional repository or publish it in a book), with an acknowledgment of its initial publication in this journal.
3. Authors are permitted and encouraged to post their work online (e.g., in institutional repositories or on their website) prior to and during the submission process, as it can lead to productive exchanges, as well as earlier

 Home
 Focus and Scope
 Publication Ethics
 Editorial Team
 Reviewer
 Peer Review Process
 Author Guidelines
 Contact Us
 Open Access Policy
 Copyright Notice
 Author Fees
 Citedness in Scopus

JOURNAL INSIGHT

Submission Received:
632 Articles (Last 3 Years)

Acceptance Rate:
24% (Last 3 Years)

Submission to Acceptance:
79 Days (Median in Last 3 Years)

Citations:
4302

Sinta IMPACT Score:

1.52

Scopus Citedness:

60 Articles

(updated: 21/04/2025)



[Accreditation Certificate]



TEMPLATE



VISITORS COUNTER



[View JANAPATI Stats](#)

RECOMMENDATION TOOLS



PLAGIARISM CHECKER

**Published By:**

**JURUSAN TEKNIK INFORMATIKA
FAKULTAS TEKNIK DAN KEJURUAN
UNIVERSITAS PENDIDIKAN GANESHA**



[Janapati](#) is licensed under a [Creative Commons Attribution-ShareAlike 4.0 International License](#).

[View JANAPATI Stats](#)

Platform &
workflow by
OJS / PKP



[HOME](#) / Editorial Team

Editorial Team

EDITOR IN CHIEF

Gede Aditra Pradnyana ([Scopus](#), [Google Scholar](#), [Sinta](#))

Universitas Pendidikan Ganesha, Bali, Indonesia

EDITORS

I Made Dendi Maysanjaya, ([Scopus](#), [Google Scholar](#), [Sinta](#))

Universitas Pendidikan Ganesha, Bali, Indonesia

Nova Eka Budiyantha, ([Scopus](#), [Google Scholar](#), [Sinta](#))

Universitas Katolik Indonesia Atma Jaya, Jakarta, Indonesia

Ida Bagus Ary Indra Iswara, ([Scopus](#), [Google Scholar](#), [Sinta](#))

Institut Bisnis dan Teknologi Indonesia, Bali, Indonesia

I Nyoman Rudy Hendrawan, ([Scopus](#), [Google Scholar](#), [Sinta](#)),

Institut Teknologi dan Bisnis STIKOM Bali, Bali, Indonesia

Gede Saindra Santyadiputra, ([Scopus](#), [Google Scholar](#), [Sinta](#))

Universitas Pendidikan Ganesha, Bali, Indonesia

Fayruz Rahma, ([Scopus](#), [Google Scholar](#), [Sinta](#))

Universitas Islam Indonesia, Yogyakarta, Indonesia

I Komang Ari Mogi, ([Scopus](#), [Google Scholar](#), [Sinta](#))

Universitas Udayana, Bali, Indonesia

Gede Arna Jude Saskara, ([Scopus](#), [Google Scholar](#), [Sinta](#))

Universitas Pendidikan Ganesha, Bali, Indonesia

Luh Putu Eka Damayanthi, ([Scopus](#), [Google Scholar](#), [Sinta](#))

Universitas Pendidikan Ganesha, Bali, Indonesia

Bagus Gede Krishna Yudistira, ([Scopus](#), [Google Scholar](#), [Sinta](#))

Universitas Pendidikan Ganesha, Bali, Indonesia

I Nengah Eka Mertayasa, ([Scopus](#), [Google Scholar](#), [Sinta](#))

Universitas Pendidikan Ganesha, Bali, Indonesia

I Nyoman Saputra Wahyu Wijaya, ([Scopus](#), [Google Scholar](#), [Sinta](#))

Universitas Pendidikan Ganesha, Bali, Indonesia

I Gusti Ayu Agung Diatri Indradewi, ([Scopus](#), [Google Scholar](#), [Sinta](#))

Universitas Pendidikan Ganesha, Bali, Indonesia


Kadek Teguh Dermawan, ([Scopus](#), [Google Scholar](#), [Sinta](#))

Universitas Pendidikan Ganesha, Bali, Indonesia

I Nyoman Tri Anindia Putra, ([Scopus](#), [Google Scholar](#), [Sinta](#))

Universitas Pendidikan Ganesha, Bali, Indonesia

 Home

 Focus and Scope

 Publication Ethics

 Editorial Team

 Reviewer

 Peer Review Process

 Author Guidelines

 Contact Us

 Open Access Policy

 Copyright Notice



Author Fees



Citedness in Scopus

JOURNAL INSIGHT

Submission Received:

632 Articles (Last 3 Years)

Acceptance Rate:

24% (Last 3 Years)

Submission to Acceptance:

79 Days (Median in Last 3 Years)

Citations:

4302

Sinta IMPACT Score:

1.52

Scopus Citedness:

60 Articles

(updated: 21/04/2025)



[Accreditation Certificate]



TEMPLATE



VISITORS COUNTER



[View JANAPATI Stats](#)

RECOMMENDATION TOOLS



PLAGIARISM CHECKER



Published By:

**JURUSAN TEKNIK INFORMATIKA
FAKULTAS TEKNIK DAN KEJURUAN
UNIVERSITAS PENDIDIKAN GANESHA**



[Janapati](#) is licensed under a [Creative Commons Attribution-ShareAlike 4.0 International License](#).

[View JANAPATI Stats](#)

Platform &
workflow by
OJS / PKP

[HOME](#) / [ARCHIVES](#) / Vol. 13 No. 3 (2024)

Vol. 13 No. 3 (2024)



Volume 13 Issue 3 of the Jurnal Nasional Pendidikan Teknik Informatika (Janapati) consists of 28 articles from 2 country, namely Indonesia, Malaysia and comes from 28 author affiliations, namely Institut Teknologi Bandung, Universitas Sebelas Maret, Universitas Gadjah Mada, Universitas Terbuka, ITB Stikom Bali, Institut Teknologi Sepuluh Nopember, Universitas Udayana, Institut Teknologi Telkom Purwokerto, Universitas Bhayangkara Jakarta Raya, Universitas Kristen Satya Wacana, Sanata Dharma University, Ministry of Industry RI, University of Science and Computer Technology, Universitas Negeri Makassar, INSTIKI Indonesia, Universitas Negeri Manado, Universitas Negeri Malang, Tanjungpura University, Universitas Pendidikan Ganesha, Universitas Dian Nusantara, Universitas Dinamika Bangsa, Universitas Teknologi Yogyakarta, Universitas Pendidikan Nasional, Badan Narkotika Nasional Indonesia, Telkom University, Universiti Kebangsaan Malaysia, and Universitas Indonesia.

[Download Cover, Editorial Page, and Table of Contents](#)

DOI: <https://doi.org/10.23887/janapati.v13i3>

PUBLISHED: 2024-12-01

ARTICLES

The Implementation of Bayesian Optimization for Automatic Parameter Selection in Convolutional Neural Network for Lung Nodule Classification

DOI: <https://doi.org/10.23887/janapati.v13i3.82467>

Kadek Eka Sapta Wijaya, Gede Angga Pradipta, Dadang Hermawan

438-449



Deep Learning for Karolinska Sleepiness Scale Classification Based On Eye Aspect Ratio with SMOTE-Enhanced Data Balancing

DOI: <https://doi.org/10.23887/janapati.v13i3.84962>

Ahmad Zaini, Eko Mulyanto Yuniarno, Yoyon K Suprpto, Annida Miftakhul Farodisa

450-459



The Implementation of Enterprise Resource Planning During the Product Design Process Through the Process of Design Thinking

DOI: <https://doi.org/10.23887/janapati.v13i3.80691>

I Gusti Bagus Budi Dharma, I Gusti Bagus Baskara Nugraha

460-470



Detection of UDP Flooding DDoS Attacks on IoT Networks Using Recurrent Neural Network

DOI: <https://doi.org/10.23887/janapati.v13i3.79601>

Warcita, Kurniabudi; Eko Arip Winanto

471-481



Network Intrusion Detection Using Transformer Models and Natural Language Processing for Enhanced Web Application Attack Detection

DOI: <https://doi.org/10.23887/janapati.v13i3.82462>

Wowon Priatna, Irwan Sembiring, Adi Setiawan, Iwan Setyawan

482-493



Classification of Lung Diseases in X-Ray Images Using Transformer-Based Deep Learning Models

DOI: <https://doi.org/10.23887/janapati.v13i3.81425>

Nyoman Sarasuartha Mahajaya, Putu Desiana Wulaning Ayu, Roy Rudolf Huizen

494-505



Data Mining Analysis of Moodle Learning Data and Student Perceptions During and After the Covid-19 Pandemic

DOI: <https://doi.org/10.23887/janapati.v13i3.84005>

Chatarina Enny Murwaningtyas, Maria Fatima Dineri De Jesus

506-519



The Data-Driven Approach in Transitioning Organizational Strategies and Capabilities: Insights from Indonesia's National Narcotics Agency

DOI: <https://doi.org/10.23887/janapati.v13i3.84864>

Komang Ari Widani, Abdullah Hasan, Benny Ranti, Muhammad Rifki Shihab, Widha Utami Putri, Syam Fikry Mardiansyah

520-531



Optimizing Healthcare Performance Through Electronic Medical Records: An Efficiency Analysis

DOI: <https://doi.org/10.23887/janapati.v13i3.85783>

Ni Kadek Tika Purniari, Nilna Muna

532-545



Facial Expression Detection System for Students in Classroom Learning Process Using YoloV7

DOI: <https://doi.org/10.23887/janapati.v13i3.83978>

Alifya Nuraisyar Aglaia, Mukhlisah Afdhaliyah, Fhatiah Adiba, Andi Baso Kaswar, Muhammad Fajar B, Dyah Darma Andayani, Muhammad Yahya

546-560



Banana and Orange Classification Detection Using Convolutional Neural Network

DOI: <https://doi.org/10.23887/janapati.v13i3.80032>

Benedict Evan Lumban Batu Lumban Batu, Wahyu Andi Saputra, Aminatus Sa'adah

561-570



Analysis of Field Work Practice Information System Service Quality Using The Webqual 4.0 Method and Importance Performance Analysis

DOI: <https://doi.org/10.23887/janapati.v13i3.79182>

Dian Nurdiana, Muhamad Riyan Maulana, Dwi Astuti Aprijani, Fitria Amastini

571-583



Developing a Marker-Based AR Application to Introduce Temples and Cultural Heritage to Younger Generations

DOI: <https://doi.org/10.23887/janapati.v13i3.76126>

Oka Sudana, Ngurah Adi, Agung Cahyawan

584-596



Correlation Analysis Approach Between Features and Motor Movement Stimulus for Stroke Severity Classification of EEG Signal Based on Time Domain, Frequency Domain, and Signal Decomposition Domain

DOI: <https://doi.org/10.23887/janapati.v13i3.85550>

Marcelinus Yosep Teguh Sulistyono, Evi Septiana Pane, Eko Mulyanto Yuniarno, Mauridhi Hery Purnomo

597-611



Enhancement of Internal Business Process Using Artificial Intelligence

DOI: <https://doi.org/10.23887/janapati.v13i3.79242>

Joseph Teguh Santoso, Agus Wibowo, Budi Raharjo

612-620



Optimizing The User Interface of Waste Bank Application Using UCD and UEQ

DOI: <https://doi.org/10.23887/janapati.v13i3.83998>

Retno Prihatini, Rianto

621-632



PDF

Model GHT-SVM for Traffic Sign Detection Using Support Vector Machine Algorithm Based On Gabor Filter and Top-Black Hat Transform

DOI: <https://doi.org/10.23887/janapati.v13i3.75778>

Handrie Noprisson, Vina Ayumi, Erwin Dwika Putra, Marissa Utami, Nur Ani

633-641



PDF

Early Detection Depression Based On Action Unit and Eye Gaze Features Using a Multi-Input CNN-WoPL Framework

DOI: <https://doi.org/10.23887/janapati.v13i3.84674>

Sugiyanto Sugiyanto, I Ketut Eddy Purnama, Eko Mulyanto Yuniarno, Mauridhi Hery Purnomo

642-657



PDF

Semantic Approach for Digital Restoration of Balinese Lontar Manuscripts

DOI: <https://doi.org/10.23887/janapati.v13i3.84916>

Ida Bagus Gede Sarasvananda, I Gde Eka Dharsika, I Wayan Kelvin Widana Saputra, Welda Welda

658-669



PDF

Systematic Literature Review: Use of Augmented Reality as A Learning Media: Trends, Applications, Challenges, and Future Potential

DOI: <https://doi.org/10.23887/janapati.v13i3.78825>

Charnila Heydemans, Hakkun Elmunsyah

670-680



PDF

Optimizing Diabetic Neuropathy Severity Classification Using Electromyography Signals Through Synthetic Oversampling Techniques

DOI: <https://doi.org/10.23887/janapati.v13i3.85675>

I Ketut Adi Purnawan, Adhi Dharma Wibawa, Arik Kurniawati, Mauridhi Hery Purnomo
681-690



Real Time Automated Speech Recognition Transcription and Sign Language Character Animation on Learning Media

DOI: <https://doi.org/10.23887/janapati.v13i3.85065>

Komang Kurniawan Widiartha, Ketut Agustini, I Made Tegeh, I Wayan Sukra Warpala
691-701



Implementation of a Web-Based Master-Slave Architecture for Greenhouse Monitoring Systems in Grape Cultivation

DOI: <https://doi.org/10.23887/janapati.v13i3.84105>

Hirzen Hasfani, Uray Ristian, Uray Syaziman Kesuma Wijaya
702-711



Synthesis of Kantil Tone Using The Frequency Modulation Method

DOI: <https://doi.org/10.23887/janapati.v13i3.84874>

I Ketut Gede Suhartana, Ni Kadek Yulia Dewi, Gst Ayu Vida Mastrika Giri
712-721



Optimization of Sales Data Forecasting Computation Process Using Parallel Computing in Cloud Environment

DOI: <https://doi.org/10.23887/janapati.v13i3.85278>

I Kadek Susila Satwika, I Putu Susila Handika
722-731



Usability and Performance Comparison: Implementation of Tiberio and Oracle Databases in the Context of CAMS Software Development

DOI: <https://doi.org/10.23887/janapati.v13i3.82519>

Komang Yuli Santika, Dandy Pramana Hostiadi, Putu Desiana Wulaning Ayu
732-747



Smart Home for Supporting Elderly Based On Ultrawideband Positioning System

DOI: <https://doi.org/10.23887/janapati.v13i3.84186>

Muhtadin, Ahmad Ricky Nazarrudin, I Ketut Eddy Purnama, Chastine Fatichah, Mauridhi Hery Purnomo
748-759



The Influence of Educational Robotics in STEM Integrated Learning and the Development of Computational Thinking Abilities

DOI: <https://doi.org/10.23887/janapati.v13i3.81608>

Muhammad Aqil Sadik, Cucuk Wawan Budiyanto, Rosihan Ari Yuana
760-768







Optimization of XGBoost Algorithm Using Parameter Tunning in Retail Sales Prediction

DOI: <https://doi.org/10.23887/janapati.v13i3.82214>

Hendra Wijaya, Dandy Pramana Hostiadi, Evi Triandini
769-786



Home
Focus and Scope
Publication Ethics
Editorial Team
Reviewer
Peer Review Process
Author Guidelines
Contact Us

-  Open Access Policy
-  Copyright Notice
-  Author Fees
-  Citedness in Scopus

JOURNAL INSIGHT

Submission Received:

632 Articles (Last 3 Years)

Acceptance Rate:

24% (Last 3 Years)

Submission to Acceptance:

79 Days (Median in Last 3 Years)

Citations:

4302

Sinta IMPACT Score:

1.52

Scopus Citedness:

60 Articles

(updated: 21/04/2025)



[Accreditation Certificate]



TEMPLATE



VISITORS COUNTER



[View JANAPATI Stats](#)

RECOMMENDATION TOOLS



PLAGIARISM CHECKER



Published By:

**JURUSAN TEKNIK INFORMATIKA
FAKULTAS TEKNIK DAN KEJURUAN
UNIVERSITAS PENDIDIKAN GANESHA**




[Janapati](#) is licensed under a [Creative Commons Attribution-ShareAlike 4.0 International License](#).

[View JANAPATI Stats](#)

Platform &
workflow by
OJS / PKP

WS Similarity Check

5+INTRUSION+DETECTION+FOR+WEB+APPLICATIONS+USING+TR (7)

 Sand_102 -- No Repository 019

Document Details

Submission ID**trn:oid::3117:483612742****Submission Date****Aug 15, 2025, 9:58 AM GMT+7****Download Date****Aug 15, 2025, 10:01 AM GMT+7****File Name****5+INTRUSION+DETECTION+FOR+WEB+APPLICATIONS+USING+TRANSFORMER+MODELS+AND+NL.....pdf****File Size****496.7 KB****12 Pages****6,915 Words****39,963 Characters**





22% Overall Similarity

The combined total of all matches, including overlapping sources, for each database.




Filtered from the Report

- Bibliography
- Quoted Text
- Cited Text

Match Groups

-  **112** Not Cited or Quoted 22%
Matches with neither in-text citation nor quotation marks
-  **0** Missing Quotations 0%
Matches that are still very similar to source material
-  **0** Missing Citation 0%
Matches that have quotation marks, but no in-text citation
-  **0** Cited and Quoted 0%
Matches with in-text citation present, but no quotation marks

Top Sources

- 15%  Internet sources
- 11%  Publications
- 14%  Submitted works (Student Papers)

Match Groups

- 112** Not Cited or Quoted 22%
Matches with neither in-text citation nor quotation marks
- 0** Missing Quotations 0%
Matches that are still very similar to source material
- 0** Missing Citation 0%
Matches that have quotation marks, but no in-text citation
- 0** Cited and Quoted 0%
Matches with in-text citation present, but no quotation marks

Top Sources

- 15% Internet sources
- 11% Publications
- 14% Submitted works (Student Papers)

Top Sources

The sources with the highest number of matches within the submission. Overlapping sources will not be displayed.

1	Student papers	Udayana University on 2025-01-26	4%
2	Internet	ejournal.undiksha.ac.id	2%
3	Internet	www.jurnal.iaii.or.id	2%
4	Internet	ntnuopen.ntnu.no	<1%
5	Publication	Hyeon gy Shon, Yoonho Lee, MyungKeun Yoon. "Semi-Supervised Alert Filtering f...	<1%
6	Publication	Ruihao Cao, Junli Wang, Mingze Mao, Guanjun Liu, Changjun Jiang. "Feature-wise ...	<1%
7	Student papers	Istanbul Aydin University on 2025-06-24	<1%
8	Student papers	British University in Egypt on 2024-12-07	<1%
9	Publication	Sai Kiran Oruganti, Dimitrios A Karras, Srinesh Singh Thakur, Janapati Krishna Ch...	<1%
10	Internet	arxiv.org	<1%

11	Internet	sistemasi.ftik.unisi.ac.id	<1%
12	Internet	www.diva-portal.org	<1%
13	Internet	www.mdpi.com	<1%
14	Internet	www.modelop.com	<1%
15	Publication	"Future Data and Security Engineering. Big Data, Security and Privacy, Smart City ...	<1%
16	Student papers	University of Nottingham on 2024-09-05	<1%
17	Student papers	Curtin University of Technology on 2025-05-23	<1%
18	Internet	deepai.org	<1%
19	Student papers	Addis Ababa University on 2025-06-23	<1%
20	Internet	www.ijrte.org	<1%
21	Publication	"Neural Information Processing", Springer Science and Business Media LLC, 2017	<1%
22	Publication	Niha Ansari. "Machine Learning in Forensic Evidence Examination - A New Era", C...	<1%
23	Internet	thesai.org	<1%
24	Publication	"Cyberspace Safety and Security", Springer Science and Business Media LLC, 2019	<1%

25	Publication	Jorge Maldonado-Correa, Joel Torres-Cabrera, Sergio Martín-Martínez, Estefanía A...	<1%
26	Internet	ijsra.net	<1%
27	Internet	www.frontiersin.org	<1%
28	Internet	www.springerprofessional.de	<1%
29	Internet	www.theseus.fi	<1%
30	Internet	www.utupub.fi	<1%
31	Publication	Alaa A. Qaffas. "Reinforcement Learning Driven Self-Adaptation in Hypervisor-Ba...	<1%
32	Student papers	University of Adelaide on 2025-07-18	<1%
33	Student papers	University of Huddersfield on 2024-01-08	<1%
34	Student papers	University of Huddersfield on 2024-03-04	<1%
35	Internet	arxiv-export-lb.library.cornell.edu	<1%
36	Internet	www.ijraset.com	<1%
37	Student papers	Accra Institute of Technology on 2025-08-03	<1%
38	Student papers	Higher Education Commission Pakistan on 2023-10-30	<1%

39	Student papers	Liverpool John Moores University on 2025-02-27	<1%
40	Student papers	The University of Manchester on 2016-07-29	<1%
41	Student papers	UPN Veteran Jawa Timur on 2025-03-30	<1%
42	Student papers	University of Reading on 2024-09-13	<1%
43	Internet	ijeecs.iaescore.com	<1%
44	Internet	mdpi-res.com	<1%
45	Internet	www.packtpub.com	<1%
46	Publication	Ahmad Hashemi, Wei Shi, Jean-Pierre Corriveau. "AI-generated or AI touch-up? Id...	<1%
47	Student papers	Al-Iraqia University on 2025-01-24	<1%
48	Student papers	Asia Pacific University College of Technology and Innovation (UCTI) on 2022-01-10	<1%
49	Publication	Budi Juarto. "Classification of Hoax News Using Machine Learning and Neural Net...	<1%
50	Student papers	London School of Economics and Political Science on 2025-08-06	<1%
51	Student papers	Udayana University on 2025-01-27	<1%
52	Student papers	University of Derby on 2025-05-16	<1%

53	Student papers	University of Greenwich on 2023-12-04	<1%
54	Student papers	University of Wollongong on 2024-05-29	<1%
55	Internet	airconline.com	<1%
56	Internet	fastercapital.com	<1%
57	Internet	file.techscience.com	<1%
58	Internet	journalofcloudcomputing.springeropen.com	<1%
59	Internet	www.joiv.org	<1%
60	Publication	Hamza Kheddar. "Transformers and large language models for efficient intrusion..."	<1%
61	Student papers	Liverpool John Moores University on 2024-04-24	<1%
62	Student papers	The University of the West of Scotland on 2024-08-07	<1%
63	Student papers	University of Glamorgan on 2024-02-15	<1%
64	Publication	Baraa Ismael Farhan, Ammar D. Jasim. "Performance analysis of intrusion detecti..."	<1%
65	Publication	José Campino. "Unleashing the transformers: NLP models detect AI writing in ed..."	<1%
66	Student papers	Liverpool John Moores University on 2024-06-12	<1%

67

Publication

Md Shakil Siddique, Md. Ashikur Rahman Khan, Ishtiaq Ahammad, Nishu Nath, Jo... <1%

68

Publication

Thinagaran Perumal, Norwati Mustapha, Raihani Mohamed, Farhad MortezaPour... <1%

69

Student papers

University of Lay Adventists of Kigali on 2025-02-27 <1%



NETWORK INTRUSION DETECTION USING TRANSFORMER MODELS AND NATURAL LANGUAGE PROCESSING FOR ENHANCED WEB APPLICATION ATTACK DETECTION

Wowon Priatna¹, Irwan Sembiring², Adi Setiawan³, Iwan Setyawan⁴,
Joni Warta⁵, Tyastuti Sri Lestari⁶

^{1,5,6}Informatika, Universitas Bhayangkara Jakarta Raya
^{2,3,4}Doktor Ilmu Komputer, Universitas Kristen Satya Wacana

email: wowon.priatna@dsn.ubharajaya.ac.id¹, irwan@uksw.edu², adi.setiawan@uksw.edu³, iwan@uksw.edu⁴,
joniwarta@dsn.ubharajaya.ac.id⁵, tyas@ubharajaya.ac.id⁶

Abstract

The increasing complexity and frequency of web application attacks demand more advanced detection methods than traditional network intrusion detection systems (NIDS), which rely heavily on predefined signatures and rules, limiting their effectiveness against novel threats. This study proposes a novel approach by integrating Transformer models with Natural Language Processing (NLP) techniques to develop an adaptive and intelligent intrusion detection framework. Leveraging the Transformer's capacity to capture long-term dependencies and NLP's ability to process contextual information, the model effectively addresses the dynamic and diverse nature of web application traffic. Using the CSIC 2010 dataset, this study applied comprehensive preprocessing, including tokenization, stemming, lemmatization, and normalization, followed by text representation techniques such as Word2Vec, BERT, and TF-IDF. The Transformer-NLP architecture significantly improved detection performance, achieving 85% accuracy, 95% precision, 83% recall, 84% F1 score, and an AUC of 0.95. Friedman and t-test validations confirmed the robustness and practical significance of the model. Despite these promising results, challenges related to computational complexity, dataset scope, and generalizability to broader network attacks remain. Future research should focus on expanding the dataset, optimizing the model, and exploring broader cybersecurity applications. This study demonstrates a significant advancement in detecting complex web application attacks, reducing false positives, and improving overall security, offering a viable solution to growing cybersecurity challenges.

Keywords: NLP, Intrusion Detection, Transformer, Web Application Attack, Machine Learning

Received: 10-07-2024 | Revised: 05-10-2024 | Accepted: 09-11-2024
DOI: <https://doi.org/10.23887/janapati.v13i3.82462>

INTRODUCTION

The security of web applications has become a paramount concern in the current digital era, especially with the rise of attacks targeting vulnerabilities in web applications[1]. As technology evolves and internet usage grows, web applications become more vulnerable to attacks like SQL injection, Cross-Site Scripting (XSS), and Denial of Service (DoS). These attacks compromise data integrity, confidentiality, and service availability, with rising frequency and complexity over time [2].

Web applications are often the first point of entry for attackers, exploiting vulnerabilities like SQL injection and Cross-Site Scripting (XSS) to gain unauthorized access or inject malicious scripts. These vulnerabilities highlight the need for robust detection mechanisms

specifically tailored to web applications. Therefore, this study focuses on detecting attacks targeting web applications, recognizing this as a critical aspect of maintaining overall network security[3]. Research on network intrusion detection systems (NIDS) has explored various methodologies to counteract these threats[4]. For instance, Research [5] provides a comprehensive overview of existing detection systems specifically designed to monitor web traffic, comparing the capabilities of systems like AppSensor, PHPIDS, ModSecurity, Shadow Daemon, and AQTRONIX WebKnight. Other studies have focused on input validation techniques to prevent intrusions, such as the approach detailed in Research [6], which emphasizes input validation against web application attacks. Additionally, Research [7]



has developed an intrusion detection model to mitigate cyber-attacks, data breaches, and identity theft, aiding in effective risk management.

Traditional approaches to network intrusion detection rely heavily on predefined signatures and rules, which limits their effectiveness in detecting new or unknown variants of attacks[8]. This rigidity necessitates more adaptive solutions. A popular approach to overcoming these limitations involves the use of machine learning (ML) and artificial intelligence (AI) to create more intelligent and flexible intrusion detection systems [9]. Machine learning models, such as Random Forest and Support Vector Machines, have been successfully employed to detect anomalies in network traffic[10]. Some studies have advanced this further by combining ensemble learning with NLP-based methods, as indicated in Research [11], to enhance the detection models' effectiveness. However, even these sophisticated methods face challenges in handling the highly dynamic and diverse data generated by web applications. The complexity of web application traffic stems from frequent updates, varying user inputs, and increasingly sophisticated attack vectors, making it difficult for traditional models to adapt in real time[12]. For example, studies have shown that vulnerabilities such as SQL injection and Cross-Site Scripting (XSS) are among the most common attack types, with SQL injection accounting for approximately 65% of web application attacks in 2022, according to OWASP reports[13]. The evolving nature of these vulnerabilities, along with their high frequency, underscores the critical need for more adaptive detection systems capable of handling the sheer volume and variety of data produced by modern web applications.

For instance, research [14] utilizing traditional ML models demonstrated moderate success in detecting known intrusions, but performance degraded significantly when applied to unknown or zero-day attacks. Moreover, approaches based on signature detection or anomaly detection often suffer from high false positive rates, making them impractical for real-world applications. To address these challenges, this study proposes a novel approach that integrates advanced Transformer models with NLP techniques to better capture the complex patterns and contextual information inherent in web application data[15]. While NLP techniques have been widely adopted, the deep integration of NLP with Transformer architectures for web application intrusion detection is a relatively

unexplored area, offering a more nuanced detection of web attacks. This combination allows for the detection of complex[16], evolving web threats that are often missed by traditional machine-learning models.

Recent advancements in deep learning, particularly the development of the Transformer model by Vaswani et al., offer a promising solution[17]. The Transformer's ability to capture long-range dependencies in sequential data and process this information efficiently through an attention-based architecture provides a robust framework for addressing the complexities of web application data. The application of Transformer models in network intrusion detection presents new opportunities for developing more adaptive and sophisticated systems capable of identifying a wide range of web attacks[18]. Research has shown that Transformers are particularly effective in analyzing patterns and anomalies within network data, leading to improved detection rates of complex attacks that are often missed by conventional methods[19].

Unlike previous models that focus on static or homogeneous data sets, the proposed research utilizes both Transformer models and NLP techniques to handle the diverse and ever-evolving nature of web application data. This approach differs significantly from existing studies, which often rely on traditional machine learning models or shallow integration of NLP techniques. Our research leverages the Transformer's ability to handle intricate patterns within the data, providing a significant advancement over existing methods. By combining the strengths of NLP in text representation and the deep learning capabilities of Transformers, this study introduces a unique framework that significantly enhances detection performance, particularly for sophisticated web attacks. While earlier studies [11][20][21] employed NLP for enhancing feature extraction in intrusion detection, this research integrates these methods more deeply within a Transformer-based architecture, representing a novel approach to the field.

The novelty of this study lies in its dual integration of NLP techniques and Transformer models for web application intrusion detection, which has not been fully explored in prior research. This combination not only provides a more nuanced approach to understanding the data but also significantly enhances the model's ability to detect sophisticated web attacks. This research contributes to the field by presenting a novel framework that leverages advanced NLP and deep learning techniques to build more resilient intrusion detection systems, potentially



reducing false positives and improving overall security[22]. The findings from this study are expected to offer valuable insights and practical implications for future research in cybersecurity, particularly in applying NLP and deep learning to enhance network security.

METHOD

This study aims to develop and analyze a network intrusion detection model based on Transformer methods and Natural Language Processing (NLP) techniques to enhance the security of web applications.

Dataset

The CSIC 2010 dataset, developed by the Spanish Research National Council, contains 61,065 records with 17 attributes, including both normal and malicious web traffic such as SQL injection, Cross-Site Scripting (XSS), and Path Traversal attacks. This dataset's diversity is crucial for training models to recognize both attack patterns and normal behaviors in web traffic, ensuring a robust evaluation of the model's ability to handle real-world scenarios[17]. The dataset's size is sufficient for training deep learning models like Transformers, which require large and diverse datasets to capture complex relationships and generalize well without overfitting. NLP techniques are essential for analyzing the textual nature of web-based attacks. Many attacks, such as SQL injection and XSS, exploit text-based inputs within HTTP requests, making them difficult to detect using traditional methods. NLP allows for deeper analysis of textual data, such as URL parameters and HTTP headers, enabling the model to identify subtle anomalies. The Transformer architecture excels at capturing long-range dependencies, making it adaptable to both known and evolving attack patterns, which is vital for detecting emerging threats in web applications.

Algorithm Selection: Transformer Architecture

In this study, we selected the Transformer architecture due to its ability to effectively process sequential data and capture long-range dependencies[23], which are critical for analyzing web application traffic. Traditional machine learning models, such as Random Forest and Support Vector Machines (SVM), often struggle with the dynamic and unstructured nature of web-based attacks, particularly when analyzing text-based HTTP requests that can be manipulated through attacks like SQL injection or Cross-Site Scripting (XSS)[24]. These conventional algorithms rely heavily on

predefined features, making them less effective in detecting new and evolving attack patterns.

The Transformer model addresses these limitations through a self-attention mechanism that highlights key parts of an input sequence, like HTTP headers and URL parameters. This feature enables it to capture extensive dependencies and complex relationships within data, enhancing its ability to identify intricate patterns beyond the reach of traditional models[25][26].

Moreover, Transformers offer significant computational advantages over recurrent models like LSTMs and GRUs, especially in large-scale datasets[27]. Their ability to process data in parallel allows for more efficient training on large-scale datasets, such as the CSIC 2010 dataset, without sacrificing accuracy. This makes Transformers not only faster but also more scalable for real-world applications that involve large and diverse data.

In addition, the integration of NLP techniques with the Transformer model enhances its ability to extract meaningful features from web traffic data[28]. Techniques such as Word2Vec, BERT, and TF-IDF enable the model to better understand textual data and context[29], facilitating more accurate detection of web application attacks that exploit text-based inputs.

Network Intrusion Detection

Network Intrusion Detection Systems (NIDS) are crucial for identifying and mitigating security threats to web applications. Traditional NIDS relies on signature-based and anomaly-based methods. Signature-based systems are adequate for known threats but struggle to detect new attacks, while anomaly-based systems can identify unknown attacks but often have high false favorable rates[30]. Advances in machine learning (ML) and deep learning (DL) have enhanced NIDS capabilities, with convolutional neural networks (CNN) and recurrent neural networks (RNN) demonstrating improved accuracy[31]. However, these models often fail to capture network logs' temporal and contextual dependencies, which is essential for detecting sophisticated web application attacks. Transformer models and Natural Language Processing (NLP) techniques have been introduced to address this. Transformers excel in capturing long-term dependencies and contextual relationships in sequential data[18], while NLP enables effective preprocessing and representation of network logs[11]. This study develops a more robust NIDS for detecting web application attacks by combining Transformer models and NLP, aiming to reduce false positives and improve detection accuracy.



Transformer

The Transformer is an architectural model that has revolutionized the landscape of natural language processing (NLP) and various other applications. As introduced in "Attention is All You Need," the Transformer relies on the self-attention mechanism to capture relationships between elements in sequential data[17]. The self-attention mechanism allows the model to efficiently consider the entire input context without processing the data sequentially, unlike traditional approaches such as RNNs and LSTM[32]. The core formula in self-attention is shown in equation (1):

$$\text{Attention}(Q, K, V) = \text{softmax}\left(\frac{QK^T}{\sqrt{DK}}\right)V \quad (1)$$

The Transformer model consists of multiple encoders and decoders, with each encoder layer comprising a self-attention mechanism and a feed-forward neural network[33]. The encoder generates contextual representations of the input, which are then used by the decoder to produce the output. This approach enables the Transformer to capture long-term dependencies and complex relationships within the data[34].

Transformers have demonstrated their superiority in various NLP tasks, including machine translation, text classification, and language modeling, outperforming previous approaches[17]. Their application in network intrusion detection leverages Transformers and NLP techniques to preprocess network logs and detect attack patterns with high efficiency and improved accuracy. This study will implement the Transformer model to enhance the detection capabilities of web application attacks, utilizing the power of self-attention to capture complex relationships in network data.

Natural Language Processing

Natural Language Processing (NLP) is a branch of artificial intelligence that enables computers to understand and generate human-like text. NLP encompasses sentiment analysis, machine translation, and network log analysis applications. Fundamental NLP techniques include tokenization (breaking text into smaller units), stemming, and lemmatization.

Recent advancements in NLP, such as BERT, use Transformer architecture to capture the bidirectional context in text, significantly improving the performance of NLP tasks. These models have been successfully applied in various domains, including cybersecurity, to process and analyze network logs for anomaly detection. This

research leverages NLP techniques to process network logs, converting them into vector representations, and employs Transformer models to detect web application attacks with greater accuracy. Recent advancements in NLP, such as BERT, utilize transformer architecture to capture bidirectional context in text, thereby enhancing the performance of NLP tasks. These models have been successfully applied across various domains, including cybersecurity, to process and analyze network logs for anomaly detection. This study leverages NLP techniques to process network logs, converting them into vector representations, and employs transformer models to more accurately detect web application attacks.

Integration of Transformer models with NLP

This study proposes the integration of Transformer models with NLP techniques to detect attacks on web applications through a Network NIDS. The proposed model in this research is illustrated in Figure 1.



Figure 1. Intrusion Detection Architecture

Based on Figure 1, the steps for intrusion detection are further detailed in Algorithm 1. The initial stage involves initializing parameters for the Transformer and the DistilBERT tokenizer. The NLP preprocessing phase includes case folding, tokenization, stemming, and normalization to ensure that the text data is consistent and formatted



adequately for analysis. The DistilBERT tokenizer then converts the preprocessed text into appropriate tokens. The following equations are used in the process: Equation (5) for converting logs, including URLs, into lowercase (case folding). Equation (6) for tokenization. Equation (7) for stemming. Equation (8) for normalization

$$\text{lower}(T) = \text{map}(\lambda x: x \rightarrow \text{lowercase}(x)) \quad (5)$$

$$\text{Token}d = \text{Tokenize}(T, \text{delimiter}) \quad (6)$$

$$\text{Stem} = \text{StemmingAlgorithm}(T) \quad (7)$$

$$\text{text} \rightarrow \text{normalized text} \quad (8)$$

Next, the tokenized data is converted into tensors, enabling processing by the Transformer model. The training phase of the Transformer model involves several critical steps, including Multi-Head Attention to capture various aspects of relationships between words, Add & Norm for normalization and residual addition, and Feed Forward layers for further data transformation. After training, the model's performance is evaluated using metrics such as accuracy, recall, F1 score, and AUC to assess its effectiveness in detecting intrusions.

$$\text{output}_{\text{residual}} = \text{input} + \text{Sublayer}(\text{input}) \quad (9)$$

$$\text{output}_{\text{norm}} = \frac{\text{output}_{\text{residual}} - \mu}{\sigma} \cdot \gamma + \beta \quad (10)$$

$$\text{FFN}_1(x) = \text{ReLU}(W_1 x + b_1) \quad (11)$$

Algorithm 1: Transformer NLP Integration

Input: Input: Dataset $D = \{(x_i, y_i)\}$

Output: Final model intrusion detection

1. Initialization:
 - Parameters for the Transformer and DistilBERT tokenizer are initialized.
2. NLP Preprocessing:
 - Case Folding
 - Tokenization
 - Steaming
 - Normalization
3. Tokenization
 - The DistilBERT Tokenizer is used to convert text into appropriate tokens:
4. Conversion to Tensors
 - The tokenized data is converted into tensors that the Transformer model can process
5. Train Transformer
 - The Transformer model is trained with the processed data

- a. Multi-Head Attention: use equation (1)
- b. Add & Norm: Normalization and residual addition. Use equations (9) and (10)
- c. Feed Forward. Use equation (11)

6. Model Evaluation

- The model has evaluated the use of equations (12), (13), (14), (15), (16).

7. Final Model

- The final model is returned for intrusion detection

Evaluation

The next step in this research is to evaluate the performance of the developed intrusion detection model. The objective of this performance testing is to determine the extent to which the model is suitable for practical use. Several evaluation parameters are utilized, including Accuracy (Ac), Recall (Re), Precision (Pr), F1 Score (F1), and Area Under the Curve (AUC)[21][35]. These parameters provide a comprehensive assessment of the model's effectiveness and reliability in classification. The formulas for each parameter are given in equations (12), (13), (14), (15), and (16)[18]. Table 1 illustrates the prediction of target labels. The next step involves reporting the model's performance using the Receiver Operating Characteristic (ROC) curve to assess the intrusion detection model.

$$\text{Accuracy} = \frac{TP+TN}{TP+FP+TN+PN} \quad (12)$$

$$\text{Precision} = \frac{TP}{TP+TF} \quad (13)$$

$$\text{Recall} = \frac{TP}{TP+FN} \quad (14)$$

$$\text{F1 Score} = \frac{2 \times \text{Precision} \times \text{recall}}{\text{precision} + \text{recall}} \quad (15)$$

$$\text{AUC} = \int_0^1 \text{TPR}(\text{FPR})d(\text{FPR}) \quad (16)$$

Table1. Confusion Matrix

	True Normal	True Anomalous
Predict Normal	TP	FP
Predict Anomalous	TN	TN

Statistical Validation

In this study, statistical validation is performed using the Friedman Test and the



Paired T-test. The Friedman Test, a non-parametric test, is used to compare the performance of multiple classification models on the same dataset[36]. This test examines the null hypothesis that there is no significant difference in the performance of these models. If the Friedman Test results indicate a significant difference, further analysis is conducted using the Paired T-test to identify which pairs of models have significantly different performances[37]. The combination of these two tests provides comprehensive validation, ensuring that the developed model is not only statistically superior but also has practical significance in its application[34].

RESULT AND DISCUSSION

The proposed Transformer-NLP method demonstrates that the Transformer model excels in capturing contextual relationships in network logs, enhancing its ability to detect web application attacks. This success can be attributed to the Transformer's self-attention mechanism, which enables the model to identify intricate attack patterns by focusing on relevant sections of the input data, making it highly effective in distinguishing between normal and anomalous traffic.

Data Processing

At this stage, data cleaning was performed, where three records with missing data were removed, reducing the dataset from 61,065 to 61,062 records. The following process involved reducing the number of variables from 17 to 2, which were relevant to the context of the research. Table 1 shows the dataset after data preprocessing. Table 2 defines the target or label for classification, where 0 represents normal, and 1 represents anomalous.

Table 2. Pre-processing Result Dataset

	URL	Label
1	<s> http :// localhost : 8080 / tienda 1 / publico / vaciar . jsp ? b 2 = vac iar + carr ito http / 1 . 1 </s>	0
2	http://localhost:8080/?OpenServer HTTP/1.1	0
610	http://localhost:80	1
62	80/tienda1/miembros.Inc HTTP/1.1	

Text Representation Formation

In this stage, processing is conducted using NLP techniques, including tokenizing, case folding, stemming, and stop word normalization. First, tokenizing: The results of tokenization demonstrate how URLs are broken down into smaller parts that the transformer model can process. This process involves adding unique tokens, handling special characters and symbols, and sub-word tokenization to address words not present in the model's overall vocabulary. Table 3 provides a clear overview of how raw data is transformed into a format suitable for NLP modelling.

Table 3. Tokenization Results

Input Process	Output Process
http://localhost:8080/tienda1/publico/vaciar.jsp?B2=Vaciar+carrito HTTP/1.1	<s> http :// localhost : 8080 / tienda 1 / publico / vaciar . jsp ? B 2 = Vac iar + carr ito HTTP / 1 . 1 </s>

Next, all characters in the URL are converted to lowercase before tokenization using case folding. Table 4 shows the results of tokenization, demonstrating that all elements in the URL have been converted to lowercase and broken down into smaller tokens. This helps ensure consistency in text processing and makes the model more robust against variations in capitalization.

Table 4. Case Folding Results

Input Process	Output Process
<s> http :// localhost : 8080 / tienda 1 / publico / vaciar . jsp ? B 2 = Vac iar + carr ito HTTP / 1 . 1 </s>	<s> http :// localhost : 8080 / tienda 1 / publico / vaciar . jsp ? b 2 = vac iar + carr ito http / 1 . 1 </s>

Table 5. Stemming Results

Input Process	Output Process
<s> http :// localhost : 8080 / tienda 1 / publico / vaciar . jsp ? b 2 = vac iar + carr ito http / 1 . 1 </s>	<s> http :// localhost : 8080 / tienda 1 / publico / vaciar . jsp ? b 2 = vac iar + carr ito http / 1 . 1 </s>

The steaming process does not significantly alter the text in this case because most tokens are part of URLs or symbols. However, words like "vaciar" and "carr" will be processed if there are suffixes that can be removed. Table 5 presents the final results,

showing that tokenization and stemming have been applied, although minimal changes occurred due to the specific characteristics of the input text (URLs and symbols).

The stop word removal stage is omitted since most tokens are part of URLs. The normalization process at this stage includes converting all text to lowercase, removing punctuation, and eliminating numbers. Lowercasing ensures consistency, allowing 'HTTP' and 'http' to be treated identically. Punctuation marks, such as periods, slashes, and question marks, are removed to streamline the text. Table 6 presents the results of applying these normalization steps to the sample input.

Table 6. Normalization Results

Input Process	Output Process
<s> http :// localhost : 8080 / tienda 1 / publico / vaciar . jsp ? b 2 = vac iar + carr ito http / 1 . 1 </s>	<s> http :// localhost : 8080 / tienda 1 / publico / vaciar . jsp ? b 2 = vac iar + carr ito http / 1 . 1 </s>

Model Implementation

In this study, the implementation of the Transformer model with the integration of Natural Language Processing (NLP) for network intrusion detection is conducted through several key stages. The first stage is data processing, which includes normalization, batch processing, and splitting the data into training and testing sets with ratios of 70/30, 80/20, and 90/10. In the NLP processing, steps such as case folding, text normalization, tokenization, and stemming are performed to ensure the text is in a consistent format. Tokenization uses the DistilBERT Tokenizer to convert the text into tokens that the Transformer model can process.

As shown in Figure 1, the architecture for network intrusion detection with Transformer and NLP integration is implemented according to Algorithm 1. In the model training stage, DistilBERT, initialized with default parameters, is used to handle the Multi-Head Attention, Add & Norm, and Feed Forward layers. The model is trained using the Adam optimizer with a learning rate of 2e-5 and the Cross-Entropy loss function. Training is conducted over three epochs with a batch size of 8. Model evaluation is performed by measuring metrics such as accuracy, recall, F1 score, and ROC-AUC to ensure the model's performance in detecting network intrusion categories classified as "Normal" and "Anomalous." Evaluation results indicate that the integration of the Transformer model and NLP is effective in detecting web application attacks and significantly contributes to the improvement of

the network intrusion detection system's accuracy. The parameters of the Transformer model integrated with NLP are shown in Table 7.

Table 7. Parameter Model

Parameter	Value
Input Shape	Input_dim
NLP Pre-processing	Case Folding, Normalization, Tokenization, Stemming
Tokenization	DistilBERTTokenizer
Multi-Head Attention	Num_heads=8, dim_model=512
Add & Norm	Layer Normalization
Feed Forward	Dense (2048, Activation='ReLU')
Linear Layer	Dense (256, activation='softmax')
Softmax Layer	Dense(num_classes, activation='softmax')
Optimizer	AdamW (learning_rate=2e-5)
Loss Function	Cross-Entropy Loss
Training Parameter	Epoch=3, Batch Size=8
Evaluation Matrix	Accuracy, Recall, F1 Score, AUC

Evaluation

The implemented model is then evaluated to test its performance. Compared to traditional algorithms such as DNN, Random Forest, and SVM, the Transformer-NLP model showed marked improvements in accuracy and AUC. Previous studies using conventional methods often struggled to maintain high detection rates across varied datasets, while the Transformer model's adaptive architecture proved effective in handling diverse attack types, as evidenced by its consistently higher AUC scores across multiple data splits. The evaluation uses equations (12), (14), (15), and (16). The results are shown in Tables 8, 9, and 10. Subsequently, the model's performance is tested using the ROC curves, which are displayed in Figures 2, 3, and 4.

Table 8. Evaluation Using 80-20 Training Split

Algorithm	A _c	R _e	F ₁	AUC
DNN	0.76	0.78	0.74	0.83
RF	0.83	0.98	0.82	0.92
DT	0.82	0.93	0.80	0.88
SVM	0.80	0.89	0.72	0.82
KNN	0.81	0.94	0.80	0.90
XGBoost	0.83	0.96	0.82	0.93
NB	0.63	0.33	0.42	0.59
Trans+NLP	0.85	0.95	0.83	0.94

Table 9. Evaluation Using 70-30 Training Split

Algorithm	A _c	R _c	F ₁	AUC
DNN	0.79	0.78	0.74	0.83
RF	0.83	0.98	0.82	0.88
DT	0.82	0.93	0.80	0.88
SVM	0.73	0.89	0.72	0.82
KNN	0.81	0.94	0.72	0.90
XGBoost	0.83	0.96	0.82	0.93
NB	0.64	0.33	0.42	0.59
Trans+NLP	0.85	0.95	0.83	0.94

Table 10. Evaluation Using 90-10 Training Split

Algorithm	A _c	R _c	F ₁	AUC
DNN	0.77	0.52	0.65	0.85
RF	0.83	0.99	0.83	0.93
DT	0.83	0.94	0.82	0.90
SVM	0.72	0.86	0.72	0.84
KNN	0.80	0.87	0.78	0.89
XGBoost	0.83	0.94	0.82	0.92
NB	0.63	0.30	0.40	0.85
Trans+NLP	0.85	0.95	0.84	0.94

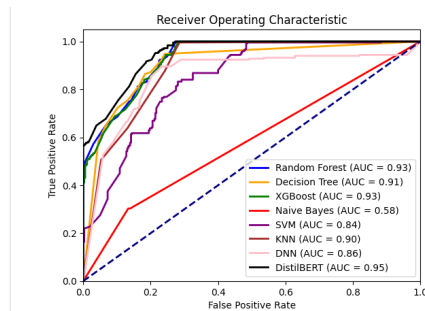


Figure 2. ROC for 90-10 Model

Statistical Validation

To test the reliability of the built model, we conducted evaluations using the Friedman test and t-test to compare its performance with other models[36]. We designated the proposed model as the control method in this experiment, and the significance level α for the statistical tests was set at 0.05. Generally, a smaller p-value indicates a significant difference between comparison methods. The results of the Friedman test and t-test are shown in Table 11.

Table 11. Friedman Test and T-test Results

	DNN	DT	XB	NB	SVM	KNN	RF
Friedman	0.0009	0.005	0.019	2.159	0.0001	0.006	0.04
T-Test	8.705	5.35	3.765	40.785	13.19	5.244	2.99

Table 12. Impact of Hyperparameter λ on Model Performance

λ	A _c	R _c	F ₁	Auc
1e-05	0.856	0.944	0.843	0.948
2e-05	0.852	0.944	0.840	0.950
3e-05	0.851	0.906	0.841	0.946
5e-05	0.849	0.952	0.838	0.946

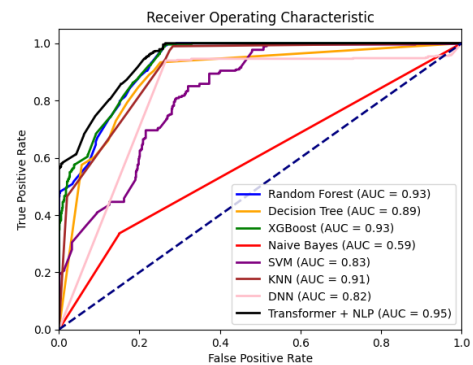


Figure 3. ROC for 80-20 Model

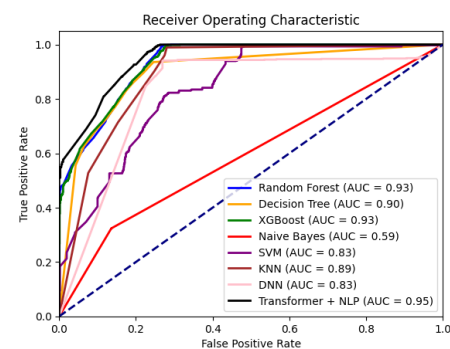


Figure 4. ROC for the 70-30 Model

Parameter Sensitivity

In this section, we examine the impact of the hyperparameter, denoted by λ , on the proposed detection model. This analysis aims to understand how variations in λ influence the model's performance and effectiveness. The study involves adjusting the λ values and observing changes in key performance metrics, such as accuracy, recall, F1 score, and ROC-AUC. The results of this hyperparameter tuning are presented in Table 12, illustrating the relationship between different λ values and the corresponding performance metrics. This detailed evaluation helps in identifying the optimal λ setting for achieving the best detection results.



Based on Table 12, although the AUC value remains the same (0.95) for several learning rate values, other metrics such as Accuracy, Recall, and F1 Score vary. The model with a learning rate of $2e-05$ shows the highest AUC of 0.9505, indicating slightly better performance compared to other learning rates. Models with learning rates of $1e-05$ and $3e-05$ exhibit nearly the same AUC values (around 0.9490) but with variations in Accuracy and Recall. The ROC curve, illustrating sensitivity, is shown in Figure 5.

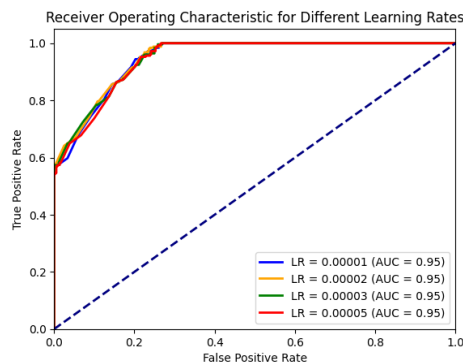


Figure 5. ROC Curve for Sensitivity Analysis of Parameters

Discussion

This study demonstrates that integrating the Transformer model with NLP techniques significantly enhances the performance of NIDS for web applications. The use of the Transformer model, with its self-attention mechanism, allows for capturing complex dependencies in sequential data, such as HTTP requests, which is crucial for detecting intricate attack patterns within dynamic and diverse web traffic. The CSIC 2010 dataset used in this study was processed through several pre-processing steps, including tokenization, stemming, lemmatization, and normalization, to ensure data consistency. Text representation techniques such as Word2Vec, BERT, and TF-IDF were employed to enable the Transformer model to effectively capture contextual relationships in network log data.

The model's performance evaluation demonstrated superior results compared to traditional algorithms like Deep Neural Network (DNN), Random Forest (RF), Decision Tree (DT), Support Vector Machine (SVM), k-nearest Neighbor (KNN), XGBoost, and Naive Bayes (NB). The Transformer-NLP model achieved higher accuracy (up to 85%), recall (95%), F1 score (83%), and AUC (0.95) across training/testing splits of 80/20, 70/30, and 90/10. This performance is especially significant when compared to traditional models, which showed

lower AUC values, indicating that the Transformer-NLP approach provides a more robust framework for intrusion detection across various scenarios, with the best AUC value of 0.9505 at a learning rate of $2e-05$, demonstrating its ability to adapt to different training scenarios. The ROC curve further illustrated the model's superior capability in distinguishing between normal and anomalous traffic, proving more reliable than the other models tested.

Statistical validation using the Friedman test and t-test confirmed the reliability and practical significance of the proposed model. Hyperparameter sensitivity analysis indicated that variations in the λ value impacted the model's performance, with a learning rate of $2e-05$ providing the optimal results. These findings suggest that the proposed Transformer-NLP model is not only effective in improving detection accuracy but also offers a robust framework for reducing false positives, enhancing the overall security posture of web applications in response to increasingly sophisticated cyber threats.

Additionally, the model effectively detects complex attack patterns, especially in text-based inputs like SQL injection and XSS, enhancing web application security, and preventing unauthorized access and malicious data manipulation. The Transformer-NLP model's unique integration of NLP for preprocessing and the self-attention mechanism significantly reduces false positive rates. This reduction enhances both efficiency and reliability in real-world scenarios, as it minimizes unnecessary alerts and focuses security resources on genuine threats. By improving precision and recall, this model presents a more reliable solution for continuous, real-time web application monitoring, minimizing unnecessary alerts and enabling security teams to focus on genuine threats. This improvement in detection accuracy directly bolsters the resilience of web applications against evolving attack methods, helping to maintain data integrity, confidentiality, and availability.

However, this study has certain limitations. First, the CSIC 2010 dataset, while useful for evaluating web application security, may not fully capture the range of modern web application attack techniques, potentially limiting the model's applicability to newer or more varied threats. Second, the computational demands of both Transformer models and NLP preprocessing may pose challenges for practical deployment, particularly in environments with constrained resources. Additionally, while this study focused on optimizing performance metrics such as accuracy and AUC, it did not extensively address potential overfitting, which can be a



concern with complex models trained on relatively limited datasets. Future research should explore the use of larger, more diverse datasets and further refine the model to balance computational efficiency with detection capability.

CONCLUSION

This study demonstrates that integrating the Transformer model with NLP techniques significantly improves NIDS performance for web applications by capturing complex contextual relationships in network log data. The Transformer-NLP model outperformed traditional algorithms, including DNN, RF, DT, SVM, KNN, XGBoost, and NB, across key metrics (accuracy, recall, F1 score, and AUC), addressing a crucial gap in current NIDS methods. Statistical validation using the Friedman and t-tests further supports the model's robustness and practical effectiveness, especially in handling the dynamic nature of web traffic.

However, limitations remain. The CSIC 2010 dataset may not fully reflect modern web application threats, which could affect generalizability. Additionally, the model's high computational demands pose challenges for real-world deployment. This study also did not deeply explore overfitting, which could impact performance given the dataset size. Future work should examine strategies such as regularization and cross-validation to enhance model robustness, along with architectural optimizations to improve computational efficiency for practical deployment in constrained environments.

REFERENCES

- [1] A. A. Bouramdane, "Cyberattacks in Smart Grids: Challenges and Solving the Multi-Criteria Decision-Making for Cybersecurity Options, Including Ones That Incorporate Artificial Intelligence, Using an Analytical Hierarchy Process," *J. Cybersecurity Priv.*, vol. 3, no. 4, pp. 662–705, 2023, doi: 10.3390/jcp3040031.
- [2] J. A. Dharma and Rino, "Network Attack Detection Using Intrusion Detection System Utilizing Snort Based on Telegram," *bit-Tech*, vol. 6, no. 2, pp. 118–126, 2023, doi: 10.32877/bt.v6i2.943.
- [3] O. J. Falana, I. O. Ebo, C. O. Tinubu, O. A. Adejimi, and A. Ntuk, "Detection of Cross-Site Scripting Attacks using Dynamic Analysis and Fuzzy Inference System," *2020 Int. Conf. Math. Comput. Eng. Comput. Sci. ICMCECS 2020*, 2020,

doi:

10.1109/ICMCECS47690.2020.240871.

- [4] P. Dini, A. Elhanashi, A. Begni, S. Saponara, Q. Zheng, and K. Gasmi, "Overview on Intrusion Detection Systems Design Exploiting Machine Learning for Networking Cybersecurity," *Appl. Sci.*, vol. 13, no. 13, 2023, doi: 10.3390/app13137507.
- [5] N. Agarwal and S. Z. Hussain, "A Closer Look at Intrusion Detection System for Web Applications," *Secur. Commun. Networks*, vol. 2018, 2018, doi: 10.1155/2018/9601357.
- [6] Y. J. Park and J. C. Park, "Web Application Intrusion Detection System for input validation attack," *Proc. - 3rd Int. Conf. Conver. Hybrid Inf. Technol. ICCIT 2008*, vol. 2, pp. 498–504, 2008, doi: 10.1109/ICCIT.2008.338.
- [7] S. Sasipriya, L. R. Madhan Kumar, R. Raghuram Krishnan, and K. Naveen Kumar, "Intrusion Detection System in Web Applications (IDSWA)," *Proc. - 5th Int. Conf. Intell. Comput. Control Syst. ICICCS 2021*, no. Iciccs, pp. 311–314, 2021, doi: 10.1109/ICICCS51141.2021.9432086.
- [8] M. Verkerken, L. D'hooge, T. Wauters, B. Volckaert, and F. De Turck, "Towards Model Generalization for Intrusion Detection: Unsupervised Machine Learning Techniques," *J. Netw. Syst. Manag.*, vol. 30, no. 1, pp. 1–25, 2022, doi: 10.1007/s10922-021-09615-7.
- [9] L. Ashiku and C. Dagli, "Network Intrusion Detection System using Deep Learning," *Procedia Comput. Sci.*, vol. 185, no. June, pp. 239–247, 2021, doi: 10.1016/j.procs.2021.05.025.
- [10] R. Sudiyarno, A. Setyanto, and E. T. Luthfi, "Peningkatan Performa Pendeteksian Anomali Menggunakan Ensemble Learning dan Feature Selection Anomaly Detection Performance Improvement Using Ensemble Learning and Feature Selection," *Citec J.*, vol. 7, no. 1, pp. 1–9, 2020.
- [11] S. Das, M. Ashrafuzzaman, F. T. Sheldon, and S. Shiva, "Network Intrusion Detection using Natural Language Processing and Ensemble Machine Learning," *2020 IEEE Symp. Ser. Comput. Intell. SSCI 2020*, no. M1, pp. 829–835, 2020, doi: 10.1109/SSCI47803.2020.9308268.
- [12] R. Sujatha, A. Teja, P. Naveen, and J. M. Chatterjee, "Web Application for Traffic

- Monitoring and Guidance,” vol. 10, no. 4, pp. 1–14, 2020, doi: 10.33168/JSMS.2020.0403.
- [13] J. R. Tadhani, V. Vekariya, V. Sorathiya, S. Alshathri, and W. El Shafai, “Securing web applications against XSS and SQLi attacks using a novel deep learning approach,” *Sci. Rep.*, pp. 1–17, 2024, doi: 10.1038/s41598-023-48845-4.
- [14] T. Sowmya and M. A. E. A., “Measurement : Sensors A comprehensive review of AI based intrusion detection system,” *Meas. Sensors*, vol. 28, no. May, p. 100827, 2023, doi: 10.1016/j.measen.2023.100827.
- [15] J. Campino, “Unleashing the transformers: NLP models detect AI writing in education,” *J. Comput. Educ.*, no. 0123456789, 2024, doi: 10.1007/s40692-024-00325-y.
- [16] N. Patwardhan, S. Marrone, and C. Sansone, “Transformers in the Real World: A Survey on NLP Applications,” 2023.
- [17] Z. Long, H. Yan, G. Shen, X. Zhang, H. He, and L. Cheng, “A Transformer-based network intrusion detection approach for cloud security,” *J. Cloud Comput.*, vol. 13, no. 1, 2024, doi: 10.1186/s13677-023-00574-9.
- [18] Y. Liu and L. Wu, “Intrusion Detection Model Based on Improved Transformer,” *Appl. Sci.*, vol. 13, no. 10, 2023, doi: 10.3390/app13106251.
- [19] J. Kim, H. Kang, and P. Kang, “Time-series anomaly detection with stacked Transformer representations and 1D convolutional network,” *Eng. Appl. Artif. Intell.*, vol. 120, no. November 2022, p. 105964, 2023, doi: 10.1016/j.engappai.2023.105964.
- [20] N. Montes, G. Betarte, R. Martínez, and A. Pardo, “Web Application Attacks Detection Using Deep Learning,” *Lect. Notes Comput. Sci. (including Subser. Lect. Notes Artif. Intell. Lect. Notes Bioinformatics)*, vol. 12702 LNCS, pp. 227–236, 2021, doi: 10.1007/978-3-030-93420-0_22.
- [21] A. D. Y. SURYADI, “Pengembangan Intrusion Detection System (IDS) Berbasis Machine Learning,” vol. 13, no. 3, pp. 189–195, 2022, [Online]. Available: <https://repository.mercubuana.ac.id/63488/>.
- [22] A. Nurdin, B. Anggo Seno Aji, A. Bustamin, and Z. Abidin, “Perbandingan Kinerja Word Embedding Word2Vec, Glove, Dan Fasttext Pada Klasifikasi Teks,” *J. Tekno Kompak*, vol. 14, no. 2, p. 74, 2020, doi: 10.33365/jtk.v14i2.732.
- [23] S. R. Choi and M. Lee, “Transformer Architecture and Attention Mechanisms in Genome Data Analysis: A Comprehensive Review,” *Biology (Basel)*, vol. 12, no. 7, 2023, doi: 10.3390/biology12071033.
- [24] H. Salih Abdullah and A. Mohsin Abdulazeez, “Detection of SQL Injection Attacks Based on Supervised Machine Learning Algorithms: A Review,” *Int. J. Informatics, Inf. Syst. Comput. Eng.*, vol. 5, no. 2, pp. 152–165, 2024, doi: 10.34010/injiiscom.v5i2.12731.
- [25] H. Wang and W. Li, “DDosTC: A transformer-based network attack detection hybrid mechanism in SDN,” *Sensors*, vol. 21, no. 15, 2021, doi: 10.3390/s21155047.
- [26] Z. Gao, Y. Shi, and S. Li, “Self-attention and long-range relationship capture network for underwater object detection,” *J. King Saud Univ. - Comput. Inf. Sci.*, vol. 36, no. 2, p. 101971, 2024, doi: 10.1016/j.jksuci.2024.101971.
- [27] H. Kheddar, “Transformers and Large Language Models for Efficient Intrusion Detection Systems: A Comprehensive Survey,” pp. 1–34.
- [28] H. Zhang and M. O. Shafiq, “Survey of transformers and towards ensemble learning using transformers for natural language processing,” *J. Big Data*, 2024, doi: 10.1186/s40537-023-00842-0.
- [29] D. E. Cahyani and I. Patasik, “Performance comparison of TF-IDF and Word2Vec models for emotion text classification,” vol. 10, no. 5, pp. 2780–2788, 2021, doi: 10.11591/eei.v10i5.3157.
- [30] G. Zachos, I. Essop, G. Mantas, K. Porfyraakis, J. C. Ribeiro, and J. Rodriguez, “Anomaly-Based Intrusion Detection System for Internet of Medical Things Networks,” *Electronics*, no. June, pp. 1–25, 2021.
- [31] A. Aldallal, “Toward Efficient Intrusion Detection System Using Hybrid Deep Learning Approach,” *Symmetry*, 2022.
- [32] A. Chandra, L. Tünnermann, T. Löfstedt, and R. Gratz, “Transformer-based deep learning for predicting protein properties in the life sciences,” *Elife*, vol. 12, pp. 1–25, 2023, doi: 10.7554/eLife.82819.
- [33] T. Lin, Y. Wang, X. Liu, and X. Qiu, “A survey of transformers,” *AI Open*, vol. 3, no. October, pp. 111–132, 2022, doi:



- 10.1016/j.aiopen.2022.10.001.
- [34] R. Cao, J. Wang, M. Mao, G. Liu, and C. Jiang, "Feature-wise attention based boosting ensemble method for fraud detection," *Eng. Appl. Artif. Intell.*, vol. 126, no. PC, p. 106975, 2023, doi: 10.1016/j.engappai.2023.106975.
- [35] T. S. Lestari, I. Ismaniah, and W. Priatna, "Particle Swarm Optimization for Optimizing Public Service Satisfaction Level Classification," *J. Nas. Pendidik. Tek. Inform.*, vol. 13, no. 1, pp. 147–155, 2024, doi: 10.23887/janapati.v13i1.69612.
- [36] J. Liu and Y. Xu, "T-Friedman Test: A New Statistical Test for Multiple Comparison with an Adjustable Conservativeness Measure," *Int. J. Comput. Intell. Syst.*, vol. 15, no. 1, pp. 1–19, 2022, doi: 10.1007/s44196-022-00083-8.
- [37] W. Priatna, H. Dwi Purnomo, A. Iriani, I. Sembiring, and T. Wellem, "Optimizing Multilayer Perceptron with Cost-Sensitive Learning for Addressing Class Imbalance in Credit Card Fraud Detection," *Resti*, vol. 8, no. 4, pp. 19–25, 2024.

← → ↺ 🏠 🔍

https://mail.google.com/mail/u/1/#search/janapati/FMfcgzQVxbfwzGVFHwKHmHktgsBdWMQc

🔍 ☆ ⬇️ 👤 ⋮

☰ Gmail

🔍 janapati

Aktif ? ⚙️ ⋮ 👤

99%
Mail

Tulis

Chat

Meet

Kotak Masuk 8,705

Berbintang

Ditunda

Terkirim

Draf 21

Selengkapnya

Label +

← 📧 ⌚ 🗑️ 📧 ⌚ 🔄 📧 🗑️ ⋮

19 dari 26 < > ✎

[JANAPATI] Submission Acknowledgement Eksternal Kotak Masuk x

G

Gede Arna Jude Saskara <ejournal@undiksha.ac.id>

kepada saya ▾

Rab, 10 Jul 2024, 14:29 ☆ ↶ ⋮

Wowon Priatna:

Thank you for submitting the manuscript, "Network Intrusion Detection Using Transformer Models and Natural Language Processing for Enhanced Web Application Attack Detection" to Jurnal Nasional Pendidikan Teknik Informatika : **JANAPATI**. With the online journal management system that we are using, you will be able to track its progress through the editorial process by logging in to the journal web site:

Manuscript URL: <https://ejournal.undiksha.ac.id/index.php/janapati/authorDashboard/submission/92452>

Username: wo2ntea

If you have any questions, please contact me. Thank you for considering this journal as a venue for your work.

Gede Arna Jude Saskara

Jurnal Nasional Pendidikan Teknik Informatika: **JANAPATI**

Terereditasi SINTA 2

↶ Balas

➦ Teruskan

82462 / Priatna et al. / Network Intrusion Detection Using Transformer Models and Natura

Library

Workflow

Publication

Submission

Review

Copyediting

Production

Round 1

Round 2

Round 3

Jurnal Nasional Pendidikan Teknik Informatika: JANAPATI



← Back to Submissions

Submission accepted.

Notifications

[JANAPATI] Editor Decision	2024-08-29 01:44 AM
[JANAPATI] Editor Decision	2024-10-04 02:55 AM
[JANAPATI] Editor Decision	2024-10-24 03:20 AM
[JANAPATI] Acceptance of Your Manuscript for ...	2024-11-07 12:29 PM
[JANAPATI] Acceptance of Your Manuscript for ...	2024-11-09 03:32 AM
[JANAPATI] Acceptance of Your Manuscript for ...	2024-11-09 03:37 AM

Reviewer's Attachments

Search

No Files

Revisions

Search


Upload File

▶		243599	82462_REV2_janapati.docx	October 28, 2024	Article Text
---	--	--------	--------------------------	------------------	--------------

Review Discussions

Add discussion

Name	From	Last Reply	Replies	Closed
No Items				





Universitas
Bhayangkara
Jakarta Raya

Wowon Priatna, S.T., M.Ti <wowon.priatna@dsn.ubharajaya.ac.id>

[JANAPATI] Editor Decision

1 pesan

Gede Saindra Santyadiputra <ejournal@undiksha.ac.id> 29 Agustus 2024 pukul 08.44
Kepada: Wowon Priatna <wowon.priatna@dsn.ubharajaya.ac.id>, Irwan Sembiring <irwan@uksw.edu>, Adi Setiawan <adi.setiawan@uksw.edu>, Iwan Iwan Setyawan <iwan@uksw.edu>

Wowon Priatna, Irwan Sembiring, Adi Setiawan, Iwan Iwan Setyawan:

We have reached a decision regarding your submission to Jurnal Nasional Pendidikan Teknik Informatika : JANAPATI, "Network Intrusion Detection Using Transformer Models and Natural Language Processing for Enhanced Web Application Attack Detection".

Our decision is to: **Resubmit for Review, no later than 12/09/2024.**

Reviewer A:
Recommendation: Resubmit for Review

Content consistency with the title of the article

Good

Scientific quality

Poor

Clarity of writing and grammar

Poor

Novelty and originality of ideas

Poor

The accuracy and clarity of the methodology

Poor

Clarity of results and conclusions

Poor

Notes/Review Comments

- 1. Specific results (include certain score) should be declared in the Abstract.
- 2. How the authors ensure that no similar research performing same solution as the authors had implemented.
- 3. "...However, these approaches have limitations in handling highly dynamic and diverse data in web applications". How can NLP solve those limitations?
- 4. Figure 1 should be improved to be more readable and specifically distinguish activities and objects (check standard for notation visualization).
- 5. The authors should narrate the suitability of used dataset. Did they fulfill the criteria following the situation in the Background? The authors should expose the sample from these datasets to prove their eligibility.
- 6. "Kemajuan terbaru dalam NLP, seperti BERT, menggunakan arsitektur transformer untuk menangkap konteks dari kedua arah dalam teks, meningkatkan kinerja tugas-tugas NLP. Model-model ini telah berhasil diterapkan dalam berbagai domain, termasuk keamanan siber, untuk memproses dan menganalisis log jaringan guna deteksi anomali. Penelitian ini memanfaatkan teknik NLP untuk memproses log jaringan, mengonversinya menjadi representasi vektor, dan menggunakan model transformer untuk mendeteksi serangan aplikasi web dengan lebih akurat." There are many Indonesian language showed in the

manuscript. Check entire manuscript.

- 7. Figure 2 cannot be read well at all.
- 8. The results did not reveal how the experiments solve the highly dynamic and diverse data in web applications (check the Introduction). Explain it more.
- 9. The article had a lack of results analysis. The authors should narrate much more about causative factors on generated results and their impacts. They also should compare the generated results with the related literature to obtain final positioning and novelty.

Jurnal Nasional Pendidikan Teknik Informatika: JANAPATI
Terekreditasi SINTA 2



Universitas
Bhayangkara
Jakarta Raya

Wowon Priatna, S.T., M.Ti <wowon.priatna@dsn.ubharajaya.ac.id>

[JANAPATI] Editor Decision

1 pesan

Gede Saindra Santyadiputra <ejournal@undiksha.ac.id> 4 Oktober 2024 pukul 09.55
Kepada: Wowon Priatna <wowon.priatna@dsn.ubharajaya.ac.id>, Irwan Sembiring <irwan@uksw.edu>, Adi Setiawan <adi.setiawan@uksw.edu>, Iwan Iwan Setyawan <iwan@uksw.edu>

Wowon Priatna, Irwan Sembiring, Adi Setiawan, Iwan Iwan Setyawan:

We have reached a decision regarding your submission to Jurnal Nasional Pendidikan Teknik Informatika : JANAPATI, "Network Intrusion Detection Using Transformer Models and Natural Language Processing for Enhanced Web Application Attack Detection".

Our decision is to: **RESUBMIT FOR REVIEW**

Please resubmit no later than **18/10/2024**.

Reviewer A:
Recommendation: Resubmit for Review

Content consistency with the title of the article

Very Good

Scientific quality

Poor

Clarity of writing and grammar

Poor

Novelty and originality of ideas

Poor

The accuracy and clarity of the methodology

Poor

Clarity of results and conclusions

Good

Notes/Review Comments

- 1. The Abstract was relatively complete following the important components as scientific writing.
- 2. How to proof nobody had performed similar idea to handle the same problems? More, "NLP" became trending in AI adoption so that maybe many researchers think to leverage it in detecting the intrusion.
- 3. "However, even these sophisticated methods face challenges in handling the highly dynamic and diverse data generated by web applications" -> How much/big this vulnerability? Was it had frequent cases?
- 4. The authors should detail why previous research were not solve the problems.
- 5. Notation as workflow in Figure 1 had many mistakes.
- 6. How about the dataset eligibility? Did the dataset have adequate divergence? Why should the authors perform NLP? Was it suitable? How about the size appropriateness.
- 7. The authors should deliver argumentation on selected algorithm much more.
- 8. The authors should argue whether the problems solved, especially from ability to protect the website.

Jurnal Nasional Pendidikan Teknik Informatika: JANAPATI

Terekreditasi SINTA 2



Universitas
Bhayangkara
Jakarta Raya

Wowon Priatna, S.T., M.Ti <wowon.priatna@dsn.ubharajaya.ac.id>

[JANAPATI] Editor Decision

1 pesan

Gede Saindra Santyadiputra <ejournal@undiksha.ac.id> 24 Oktober 2024 pukul 10.20
Kepada: Wowon Priatna <wowon.priatna@dsn.ubharajaya.ac.id>, Irwan Sembiring <irwan@uksw.edu>, Adi Setiawan <adi.setiawan@uksw.edu>, Iwan Iwan Setyawan <iwan@uksw.edu>

Dear Wowon Priatna, Irwan Sembiring, Adi Setiawan, Iwan Iwan Setyawan,

Thank you for submitting your manuscript titled "Network Intrusion Detection Using Transformer Models and Natural Language Processing for Enhanced Web Application Attack Detection" to Jurnal Nasional Pendidikan Teknik Informatika (JANAPATI).

After careful consideration and thorough review by our esteemed panel of reviewers, we are pleased to inform you that your manuscript has been **ACCEPTED WITH MINOR REVISIONS**. We believe that your research holds significant value and, with the suggested revisions, will make an important contribution to our journal and the wider academic community.

Action Required:

- 1. **Revise Your Manuscript:** Below this email, you will find detailed comments from our reviewers. Please carefully address the reviewers' comments and make the necessary revisions to your manuscript. We ask that you highlight or clearly indicate the revised sections in your document to facilitate the review of your changes. If needed, alongside your revised manuscript, you may provide a response letter detailing how you have addressed each comment. If you disagree with any reviewer suggestions, please provide a clear rationale for your decision.
- 2. **Use the JANAPATI Template:** Ensure that your revised manuscript adheres to our formatting guidelines. You can download the latest JANAPATI article template from our website if you have not already done so.
- 3. **Submission Deadline:** The revised version of your manuscript should be submitted **no later than 31/10/2024**. This timeline is crucial to maintain the publication schedule.

We appreciate your dedication to enhancing your manuscript and look forward to receiving your revisions. Should you have any questions or require further clarification on the reviewers' feedback, please do not hesitate to contact us.

Thank you for choosing JANAPATI for your research. We are committed to supporting you through the publication process and ensuring your work reaches a wide audience.

Warm Regards,

Reviewer A:
Recommendation: Accept Submission

Content consistency with the title of the article

Good

Scientific quality

Good

Clarity of writing and grammar

Poor

Novelty and originality of ideas

Good

The accuracy and clarity of the methodology

Good

Clarity of results and conclusions

Poor

Notes/Review Comments

- 1. Issues no.1, 3, 4, 5, 6, 7, 8, and 9 are solved.
- 2. The authors should check much more about Indonesian language, such as "arsitektur".
- 3. Issues no.2 was not specified the location for revision. However, the reviewer believes that it has been followed up in last two paragraph in the Introduction.

- 4. In Discussion, the authors can put their interpretation about generated results. More, they also can compare the results with related literature to clarify whether any alignment or may be contrast among them.

Jurnal Nasional Pendidikan Teknik Informatika: JANAPATI

Terekreditasi SINTA 2



Universitas
Bhayangkara
Jakarta Raya

Wowon Priatna, S.T., M.Ti <wowon.priatna@dsn.ubharajaya.ac.id>

[JANAPATI] Acceptance of Your Manuscript for Publication in JANAPATI

2 pesan

Gede Saindra Santyadiputra <ejournal@undiksha.ac.id> 7 November 2024 pukul 19.29
Kepada: Wowon Priatna <wowon.priatna@dsn.ubharajaya.ac.id>, Irwan Sembiring <irwan@uksw.edu>, Adi Setiawan <adi.setiawan@uksw.edu>, Iwan Iwan Setyawan <iwan@uksw.edu>

Dear Wowon Priatna, Irwan Sembiring, Adi Setiawan, Iwan Iwan Setyawan:

Congratulations! It is with great pleasure that we inform you that your manuscript titled "Network Intrusion Detection Using Transformer Models and Natural Language Processing for Enhanced Web Application Attack Detection" has been **accepted for publication** in the Jurnal Nasional Pendidikan Teknik Informatika : JANAPATI.

Your contribution is a valuable addition to our journal, and we are excited to share your findings with our readership. Before your article can be published in **JANAPATI Volume 13, Number 3, 2024**, it will undergo a final editing process to ensure it meets our publication standards.

Publication Fee

As part of the publication process, there is a required publication fee detailed on our website [here](#). Please arrange for the payment to be transferred to the following account details **no later than November 10, 2024 23:00:00**,

- **Bank Name:** Bank Rakyat Indonesia (BRI) - BRIVA
- **Virtual Account Number:** 103
- **Account Holder:** Wowon Priatna
- **Amount Due:** IDR 2,000,000

Payment Confirmation

After completing the payment, kindly confirm your payment by filling out the form available at the following link: [Payment Confirmation Form](#).

Should you have any questions or require further assistance, please do not hesitate to contact us. We look forward to your prompt action to facilitate the smooth publication of your article.

Thank you for choosing JANAPATI as the platform to publish your research. We are committed to disseminating high-quality research and are delighted to include your work in our journal.

Warm regards,

JANAPATI Editorial Team

Universitas Pendidikan Ganesha

Jurnal Nasional Pendidikan Teknik Informatika: JANAPATI

Terekreditasi SINTA 2

Wowon Priatna, S.T., M.Ti <wowon.priatna@dsn.ubharajaya.ac.id> 8 November 2024 pukul 14.27
Kepada: Gede Saindra Santyadiputra <ejournal@undiksha.ac.id>

Dear Gede Saindra Santyadiputra and JANAPATI Editorial Team,

Thank you very much for the acceptance of our manuscript, "*Network Intrusion Detection Using Transformer Models and Natural Language Processing for Enhanced Web Application Attack Detection*." We are honored to have our work included in the upcoming JANAPATI Volume 13, Number 3, 2024.

Regarding the publication fee payment, I would like to request confirmation of the complete BRIVA details, including the full BRIVA virtual account number, as it appears the BRIVA number provided is incomplete. Could you kindly provide the correct BRIVA details so that we can proceed with the payment promptly?

Thank you once again for your guidance and assistance throughout this process. We look forward to contributing to JANAPATI's readership with this publication.

Warm regards,
Wowon Priatna

[Kutipan teks disembunyikan]



Universitas
Bhayangkara
Jakarta Raya

Wowon Priatna, S.T., M.Ti <wowon.priatna@dsn.ubharajaya.ac.id>

[JANAPATI] Acceptance of Your Manuscript for Publication in JANAPATI

2 pesan

Gede Saindra Santyadiputra <ejournal@undiksha.ac.id>9 November 2024 pukul 10.32

Kepada: Wowon Priatna <wowon.priatna@dsn.ubharajaya.ac.id>, Irwan Sembiring <irwan@uksw.edu>, Adi Setiawan <adi.setiawan@uksw.edu>, Iwan Iwan Setyawan <iwan@uksw.edu>

Dear Wowon Priatna, Irwan Sembiring, Adi Setiawan, Iwan Iwan Setyawan:

Congratulations! It is with great pleasure that we inform you that your manuscript titled "Network Intrusion Detection Using Transformer Models and Natural Language Processing for Enhanced Web Application Attack Detection" has been **accepted for publication** in the Jurnal Nasional Pendidikan Teknik Informatika : JANAPATI.

Your contribution is a valuable addition to our journal, and we are excited to share your findings with our readership. Before your article can be published in **JANAPATI Volume 13, Number 3, 2024**, it will undergo a final editing process to ensure it meets our publication standards.

Publication Fee

As part of the publication process, there is a required publication fee detailed on our website [here](#). Please arrange for the payment to be transferred to the following account details **no later than [Month Date, Year hh:mm:ss]**:

- **Bank Name:** Bank Rakyat Indonesia (BRI) - BRIVA
- **Virtual Account Number:** 7237682462
- **Account Holder:** 103 Wowon Priatna
- **Amount Due:** IDR 2,000,000

Payment Confirmation

After completing the payment, kindly confirm your payment by filling out the form available at the following link: [Payment Confirmation Form](#).

Should you have any questions or require further assistance, please do not hesitate to contact us. We look forward to your prompt action to facilitate the smooth publication of your article.

Thank you for choosing JANAPATI as the platform to publish your research. We are committed to disseminating high-quality research and are delighted to include your work in our journal.

Warm regards,

JANAPATI Editorial Team

Universitas Pendidikan Ganesha

Jurnal Nasional Pendidikan Teknik Informatika: JANAPATI

Terekreditasi SINTA 2

Gede Saindra Santyadiputra <ejournal@undiksha.ac.id>9 November 2024 pukul 10.37

Kepada: Wowon Priatna <wowon.priatna@dsn.ubharajaya.ac.id>, Irwan Sembiring <irwan@uksw.edu>, Adi Setiawan <adi.setiawan@uksw.edu>, Iwan Iwan Setyawan <iwan@uksw.edu>

Dear Wowon Priatna, Irwan Sembiring, Adi Setiawan, Iwan Iwan Setyawan:

Congratulations! It is with great pleasure that we inform you that your manuscript titled "Network Intrusion Detection Using Transformer Models and Natural Language Processing for Enhanced Web Application Attack Detection" has been **accepted for publication** in the Jurnal Nasional Pendidikan Teknik Informatika : JANAPATI.

Your contribution is a valuable addition to our journal, and we are excited to share your findings with our readership. Before your article can be published in **JANAPATI Volume 13, Number 3, 2024**, it will undergo a final editing process to ensure it meets our publication standards.

Publication Fee

As part of the publication process, there is a required publication fee detailed on our website [here](#). Please arrange for the payment to be transferred to the following account details **no later than November 10, 2024 23:00:00**:

[Kutipan teks disembunyikan]

NETWORK INTRUSION DETECTION USING TRANSFORMER MODELS AND NATURAL LANGUAGE PROCESSING FOR ENHANCED WEB APPLICATION ATTACK DETECTION

Wowon Priatna¹, Irwan Sembiring², Adi Setiawan³, Iwan Setyawan⁴,
Joni Warta⁵, Tyastuti Sri Lestari⁶

^{1,5,6}Informatika, Universitas Bhayangkara Jakarta Raya
^{2,3,4}Doktor Ilmu Komputer, Universitas Kristen Satya Wacana

email: wowon.priatna@dsn.ubharajaya.ac.id¹, irwan@uksw.edu², adi.setiawan@uksw.edu³, iwan@uksw.edu⁴,
joniwarta@dsn.ubharajaya.ac.id⁵, tyas@ubharajaya.ac.id⁶

Abstract

The increasing complexity and frequency of web application attacks demand more advanced detection methods than traditional network intrusion detection systems (NIDS), which rely heavily on predefined signatures and rules, limiting their effectiveness against novel threats. This study proposes a novel approach by integrating Transformer models with Natural Language Processing (NLP) techniques to develop an adaptive and intelligent intrusion detection framework. Leveraging the Transformer's capacity to capture long-term dependencies and NLP's ability to process contextual information, the model effectively addresses the dynamic and diverse nature of web application traffic. Using the CSIC 2010 dataset, this study applied comprehensive preprocessing, including tokenization, stemming, lemmatization, and normalization, followed by text representation techniques such as Word2Vec, BERT, and TF-IDF. The Transformer-NLP architecture significantly improved detection performance, achieving 85% accuracy, 95% precision, 83% recall, 84% F1 score, and an AUC of 0.95. Friedman and t-test validations confirmed the robustness and practical significance of the model. Despite these promising results, challenges related to computational complexity, dataset scope, and generalizability to broader network attacks remain. Future research should focus on expanding the dataset, optimizing the model, and exploring broader cybersecurity applications. This study demonstrates a significant advancement in detecting complex web application attacks, reducing false positives, and improving overall security, offering a viable solution to growing cybersecurity challenges.

Keywords: NLP, Intrusion Detection, Transformer, Web Application Attack, Machine Learning

Received: 10-07-2024 | **Revised:** 05-10-2024 | **Accepted:** 09-11-2024
DOI: <https://doi.org/10.23887/janapati.v13i3.82462>

INTRODUCTION

The security of web applications has become a paramount concern in the current digital era, especially with the rise of attacks targeting vulnerabilities in web applications[1]. As technology evolves and internet usage grows, web applications become more vulnerable to attacks like SQL injection, Cross-Site Scripting (XSS), and Denial of Service (DoS). These attacks compromise data integrity, confidentiality, and service availability, with rising frequency and complexity over time [2].

Web applications are often the first point of entry for attackers, exploiting vulnerabilities like SQL injection and Cross-Site Scripting (XSS) to gain unauthorized access or inject malicious scripts. These vulnerabilities highlight the need for robust detection mechanisms

specifically tailored to web applications. Therefore, this study focuses on detecting attacks targeting web applications, recognizing this as a critical aspect of maintaining overall network security[3]. Research on network intrusion detection systems (NIDS) has explored various methodologies to counteract these threats[4]. For instance, Research [5] provides a comprehensive overview of existing detection systems specifically designed to monitor web traffic, comparing the capabilities of systems like AppSensor, PHPIDS, ModSecurity, Shadow Daemon, and AQTRONIX WebKnight. Other studies have focused on input validation techniques to prevent intrusions, such as the approach detailed in Research [6], which emphasizes input validation against web application attacks. Additionally, Research [7]

has developed an intrusion detection model to mitigate cyber-attacks, data breaches, and identity theft, aiding in effective risk management.

Traditional approaches to network intrusion detection rely heavily on predefined signatures and rules, which limits their effectiveness in detecting new or unknown variants of attacks[8]. This rigidity necessitates more adaptive solutions. A popular approach to overcoming these limitations involves the use of machine learning (ML) and artificial intelligence (AI) to create more intelligent and flexible intrusion detection systems [9]. Machine learning models, such as Random Forest and Support Vector Machines, have been successfully employed to detect anomalies in network traffic[10]. Some studies have advanced this further by combining ensemble learning with NLP-based methods, as indicated in Research [11], to enhance the detection models' effectiveness. However, even these sophisticated methods face challenges in handling the highly dynamic and diverse data generated by web applications. The complexity of web application traffic stems from frequent updates, varying user inputs, and increasingly sophisticated attack vectors, making it difficult for traditional models to adapt in real time[12]. For example, studies have shown that vulnerabilities such as SQL injection and Cross-Site Scripting (XSS) are among the most common attack types, with SQL injection accounting for approximately 65% of web application attacks in 2022, according to OWASP reports[13]. The evolving nature of these vulnerabilities, along with their high frequency, underscores the critical need for more adaptive detection systems capable of handling the sheer volume and variety of data produced by modern web applications.

For instance, research [14] utilizing traditional ML models demonstrated moderate success in detecting known intrusions, but performance degraded significantly when applied to unknown or zero-day attacks. Moreover, approaches based on signature detection or anomaly detection often suffer from high false positive rates, making them impractical for real-world applications. To address these challenges, this study proposes a novel approach that integrates advanced Transformer models with NLP techniques to better capture the complex patterns and contextual information inherent in web application data[15]. While NLP techniques have been widely adopted, the deep integration of NLP with Transformer architectures for web application intrusion detection is a relatively

unexplored area, offering a more nuanced detection of web attacks. This combination allows for the detection of complex[16], evolving web threats that are often missed by traditional machine-learning models.

Recent advancements in deep learning, particularly the development of the Transformer model by Vaswani et al., offer a promising solution[17]. The Transformer's ability to capture long-range dependencies in sequential data and process this information efficiently through an attention-based architecture provides a robust framework for addressing the complexities of web application data. The application of Transformer models in network intrusion detection presents new opportunities for developing more adaptive and sophisticated systems capable of identifying a wide range of web attacks[18]. Research has shown that Transformers are particularly effective in analyzing patterns and anomalies within network data, leading to improved detection rates of complex attacks that are often missed by conventional methods[19].

Unlike previous models that focus on static or homogeneous data sets, the proposed research utilizes both Transformer models and NLP techniques to handle the diverse and ever-evolving nature of web application data. This approach differs significantly from existing studies, which often rely on traditional machine learning models or shallow integration of NLP techniques. Our research leverages the Transformer's ability to handle intricate patterns within the data, providing a significant advancement over existing methods. By combining the strengths of NLP in text representation and the deep learning capabilities of Transformers, this study introduces a unique framework that significantly enhances detection performance, particularly for sophisticated web attacks. While earlier studies [11][20][21] employed NLP for enhancing feature extraction in intrusion detection, this research integrates these methods more deeply within a Transformer-based architecture, representing a novel approach to the field.

The novelty of this study lies in its dual integration of NLP techniques and Transformer models for web application intrusion detection, which has not been fully explored in prior research. This combination not only provides a more nuanced approach to understanding the data but also significantly enhances the model's ability to detect sophisticated web attacks. This research contributes to the field by presenting a novel framework that leverages advanced NLP and deep learning techniques to build more resilient intrusion detection systems, potentially

reducing false positives and improving overall security[22]. The findings from this study are expected to offer valuable insights and practical implications for future research in cybersecurity, particularly in applying NLP and deep learning to enhance network security.

METHOD

This study aims to develop and analyze a network intrusion detection model based on Transformer methods and Natural Language Processing (NLP) techniques to enhance the security of web applications.

Dataset

The CSIC 2010 dataset, developed by the Spanish Research National Council, contains 61,065 records with 17 attributes, including both normal and malicious web traffic such as SQL injection, Cross-Site Scripting (XSS), and Path Traversal attacks. This dataset's diversity is crucial for training models to recognize both attack patterns and normal behaviors in web traffic, ensuring a robust evaluation of the model's ability to handle real-world scenarios[17]. The dataset's size is sufficient for training deep learning models like Transformers, which require large and diverse datasets to capture complex relationships and generalize well without overfitting. NLP techniques are essential for analyzing the textual nature of web-based attacks. Many attacks, such as SQL injection and XSS, exploit text-based inputs within HTTP requests, making them difficult to detect using traditional methods. NLP allows for deeper analysis of textual data, such as URL parameters and HTTP headers, enabling the model to identify subtle anomalies. The Transformer architecture excels at capturing long-range dependencies, making it adaptable to both known and evolving attack patterns, which is vital for detecting emerging threats in web applications.

Algorithm Selection: Transformer Architecture

In this study, we selected the Transformer architecture due to its ability to effectively process sequential data and capture long-range dependencies[23], which are critical for analyzing web application traffic. Traditional machine learning models, such as Random Forest and Support Vector Machines (SVM), often struggle with the dynamic and unstructured nature of web-based attacks, particularly when analyzing text-based HTTP requests that can be manipulated through attacks like SQL injection or Cross-Site Scripting (XSS)[24]. These conventional algorithms rely heavily on

predefined features, making them less effective in detecting new and evolving attack patterns.

The Transformer model addresses these limitations through a self-attention mechanism that highlights key parts of an input sequence, like HTTP headers and URL parameters. This feature enables it to capture extensive dependencies and complex relationships within data, enhancing its ability to identify intricate patterns beyond the reach of traditional models[25][26].

Moreover, Transformers offer significant computational advantages over recurrent models like LSTMs and GRUs, especially in large-scale datasets[27]. Their ability to process data in parallel allows for more efficient training on large-scale datasets, such as the CSIC 2010 dataset, without sacrificing accuracy. This makes Transformers not only faster but also more scalable for real-world applications that involve large and diverse data.

In addition, the integration of NLP techniques with the Transformer model enhances its ability to extract meaningful features from web traffic data[28]. Techniques such as Word2Vec, BERT, and TF-IDF enable the model to better understand textual data and context[29], facilitating more accurate detection of web application attacks that exploit text-based inputs.

Network Intrusion Detection

Network Intrusion Detection Systems (NIDS) are crucial for identifying and mitigating security threats to web applications. Traditional NIDS relies on signature-based and anomaly-based methods. Signature-based systems are adequate for known threats but struggle to detect new attacks, while anomaly-based systems can identify unknown attacks but often have high false favorable rates[30]. Advances in machine learning (ML) and deep learning (DL) have enhanced NIDS capabilities, with convolutional neural networks (CNN) and recurrent neural networks (RNN) demonstrating improved accuracy[31]. However, these models often fail to capture network logs' temporal and contextual dependencies, which is essential for detecting sophisticated web application attacks. Transformer models and Natural Language Processing (NLP) techniques have been introduced to address this. Transformers excel in capturing long-term dependencies and contextual relationships in sequential data[18], while NLP enables effective preprocessing and representation of network logs[11]. This study develops a more robust NIDS for detecting web application attacks by combining Transformer models and NLP, aiming to reduce false positives and improve detection accuracy.

Transformer

The Transformer is an architectural model that has revolutionized the landscape of natural language processing (NLP) and various other applications. As introduced in "Attention is All You Need," the Transformer relies on the self-attention mechanism to capture relationships between elements in sequential data[17]. The self-attention mechanism allows the model to efficiently consider the entire input context without processing the data sequentially, unlike traditional approaches such as RNNs and LSTM[32]. The core formula in self-attention is shown in equation (1):

$$\text{Attention}(Q, K, V) = \text{softmax}\left(\frac{QK^T}{\sqrt{DK}}\right)V \quad (1)$$

The Transformer model consists of multiple encoders and decoders, with each encoder layer comprising a self-attention mechanism and a feed-forward neural network[33]. The encoder generates contextual representations of the input, which are then used by the decoder to produce the output. This approach enables the Transformer to capture long-term dependencies and complex relationships within the data[34].

Transformers have demonstrated their superiority in various NLP tasks, including machine translation, text classification, and language modeling, outperforming previous approaches[17]. Their application in network intrusion detection leverages Transformers and NLP techniques to preprocess network logs and detect attack patterns with high efficiency and improved accuracy. This study will implement the Transformer model to enhance the detection capabilities of web application attacks, utilizing the power of self-attention to capture complex relationships in network data.

Natural Language Processing

Natural Language Processing (NLP) is a branch of artificial intelligence that enables computers to understand and generate human-like text. NLP encompasses sentiment analysis, machine translation, and network log analysis applications. Fundamental NLP techniques include tokenization (breaking text into smaller units), stemming, and lemmatization.

Recent advancements in NLP, such as BERT, use Transformer architecture to capture the bidirectional context in text, significantly improving the performance of NLP tasks. These models have been successfully applied in various domains, including cybersecurity, to process and analyze network logs for anomaly detection. This

research leverages NLP techniques to process network logs, converting them into vector representations, and employs Transformer models to detect web application attacks with greater accuracy. Recent advancements in NLP, such as BERT, utilize transformer architecture to capture bidirectional context in text, thereby enhancing the performance of NLP tasks. These models have been successfully applied across various domains, including cybersecurity, to process and analyze network logs for anomaly detection. This study leverages NLP techniques to process network logs, converting them into vector representations, and employs transformer models to more accurately detect web application attacks.

Integration of Transformer models with NLP

This study proposes the integration of Transformer models with NLP techniques to detect attacks on web applications through a Network NIDS. The proposed model in this research is illustrated in Figure 1.



Figure 1. Intrusion Detection Architecture

Based on Figure 1, the steps for intrusion detection are further detailed in Algorithm 1. The initial stage involves initializing parameters for the Transformer and the DistilBERT tokenizer. The NLP preprocessing phase includes case folding, tokenization, stemming, and normalization to ensure that the text data is consistent and formatted

adequately for analysis. The DistilBERT tokenizer then converts the preprocessed text into appropriate tokens. The following equations are used in the process: Equation (5) for converting logs, including URLs, into lowercase (case folding). Equation (6) for tokenization. Equation (7) for stemming. Equation (8) for normalization

$$lower(T) = map(\lambda x: x \rightarrow lowercase(x)) \quad (5)$$

$$Tokenend = Tokenize(T, delimiter) \quad (6)$$

$$Stem = StemmingAlgoritm(T) \quad (7)$$

$$text \rightarrow \text{normalized text} \quad (8)$$

Next, the tokenized data is converted into tensors, enabling processing by the Transformer model. The training phase of the Transformer model involves several critical steps, including Multi-Head Attention to capture various aspects of relationships between words, Add & Norm for normalization and residual addition, and Feed Forward layers for further data transformation. After training, the model's performance is evaluated using metrics such as accuracy, recall, F1 score, and AUC to assess its effectiveness in detecting intrusions.

$$output_{residual} = input + Sublayer(input) \quad (9)$$

$$output_{norm} = \frac{output_{residual} - \mu}{\sigma} \cdot \gamma + \beta \quad (10)$$

$$FFN_1(x) = ReLU(W_1x + b_1) \quad (11)$$

Algorithm 1: Transformer NLP Integration

Input: Input: Dataset $D=\{(x_i, y_i)\}$

Output: Final model intrusion detection

1. Initialization:
 - Parameters for the Transformer and DistilBERT tokenizer are initialized.
2. NLP Preprocessing:
 - Case Folding
 - Tokenization
 - Steaming
 - Normalization
3. Tokenization
 - The DistilBERT Tokenizer is used to convert text into appropriate tokens:
4. Conversion to Tensors
 - The tokenized data is converted into tensors that the Transformer model can process
5. Train Transformer
 - The Transformer model is trained with the processed data

- a. Multi-Head Attention: use equation (1)
 - b. Add & Norm: Normalization and residual addition. Use equations (9) and (10)
 - c. Feed Forward. Use equation (11)
6. Model Evaluation
 - The model has evaluated the use of equations (12), (13), (14), (15), (16).
 7. Final Model
 - The final model is returned for intrusion detection

Evaluation

The next step in this research is to evaluate the performance of the developed intrusion detection model. The objective of this performance testing is to determine the extent to which the model is suitable for practical use. Several evaluation parameters are utilized, including Accuracy (Ac), Recall (Re), Precision (Pr), F1 Score (F1), and Area Under the Curve (AUC)[21][35]. These parameters provide a comprehensive assessment of the model's effectiveness and reliability in classification. The formulas for each parameter are given in equations (12), (13), (14), (15), and (16)[18]. Table 1 illustrates the prediction of target labels. The next step involves reporting the model's performance using the Receiver Operating Characteristic (ROC) curve to assess the intrusion detection model.

$$Accuracy = \frac{TP+TN}{TP+FP+TN+PN} \quad (12)$$

$$Precision = \frac{TP}{TP+TF} \quad (13)$$

$$Recall = \frac{TP}{TP+TN} \quad (14)$$

$$F1\ Score = \frac{2 \times Precision \times recall}{precision+recall} \quad (15)$$

$$AUC = \int_0^1 TPR(FPR)d(FPR) \quad (16)$$

Table1. Confusion Matrix

	True Normal	True Anomalous
Predict Normal	TP	FP
Predict Anomalous	TN	TN

Statistical Validation

In this study, statistical validation is performed using the Friedman Test and the

Paired T-test. The Friedman Test, a non-parametric test, is used to compare the performance of multiple classification models on the same dataset[36]. This test examines the null hypothesis that there is no significant difference in the performance of these models. If the Friedman Test results indicate a significant difference, further analysis is conducted using the Paired T-test to identify which pairs of models have significantly different performances[37]. The combination of these two tests provides comprehensive validation, ensuring that the developed model is not only statistically superior but also has practical significance in its application[34].

RESULT AND DISCUSSION

The proposed Transformer-NLP method demonstrates that the Transformer model excels in capturing contextual relationships in network logs, enhancing its ability to detect web application attacks. This success can be attributed to the Transformer's self-attention mechanism, which enables the model to identify intricate attack patterns by focusing on relevant sections of the input data, making it highly effective in distinguishing between normal and anomalous traffic.

Data Processing

At this stage, data cleaning was performed, where three records with missing data were removed, reducing the dataset from 61,065 to 61,062 records. The following process involved reducing the number of variables from 17 to 2, which were relevant to the context of the research. Table 1 shows the dataset after data preprocessing. Table 2 defines the target or label for classification, where 0 represents normal, and 1 represents anomalous.

Table 2. Pre-processing Result Dataset

	URL	Label
1	<s> http :// localhost : 8080 / tienda 1 / publico / vaciar . jsp ? b 2 = vac iar + carr ito http / 1 . 1 </s>	0
2	http://localhost:8080/?OpenServerHTTP/1.1	0
610	http://localhost:80	1
62	80/tienda1/miembros.Inc HTTP/1.1	

Text Representation Formation

In this stage, processing is conducted using NLP techniques, including tokenizing, case folding, stemming, and stop word normalization. First, tokenizing: The results of tokenization demonstrate how URLs are broken down into smaller parts that the transformer model can process. This process involves adding unique tokens, handling special characters and symbols, and sub-word tokenization to address words not present in the model's overall vocabulary. Table 3 provides a clear overview of how raw data is transformed into a format suitable for NLP modelling.

Table 3. Tokenization Results

Input Process	Output Process
http://localhost:8080/tienda1/publico/vaciar.jsp?B2=Vaciar+carrito HTTP/1.1	<s> http :// localhost : 8080 / tienda 1 / publico / vaciar . jsp ? B 2 = Vac iar + carr ito HTTP / 1 . 1 </s>

Next, all characters in the URL are converted to lowercase before tokenization using case folding. Table 4 shows the results of tokenization, demonstrating that all elements in the URL have been converted to lowercase and broken down into smaller tokens. This helps ensure consistency in text processing and makes the model more robust against variations in capitalization.

Table 4. Case Folding Results

Input Process	Output Process
<s> http :// localhost : 8080 / tienda 1 / publico / vaciar . jsp ? B 2 = Vac iar + carr ito HTTP / 1 . 1 </s>	<s> http :// localhost : 8080 / tienda 1 / publico / vaciar . jsp ? b 2 = vac iar + carr ito http / 1 . 1 </s>

Table 5. Stemming Results

Input Process	Output Process
<s> http :// localhost : 8080 / tienda 1 / publico / vaciar . jsp ? b 2 = vac iar + carr ito http / 1 . 1 </s>	<s> http :// localhost : 8080 / tienda 1 / publico / vaciar . jsp ? b 2 = vac iar + carr ito http / 1 . 1 </s>

The steaming process does not significantly alter the text in this case because most tokens are part of URLs or symbols. However, words like "vaciar" and "carr" will be processed if there are suffixes that can be removed. Table 5 presents the final results,

showing that tokenization and stemming have been applied, although minimal changes occurred due to the specific characteristics of the input text (URLs and symbols).

The stop word removal stage is omitted since most tokens are part of URLs. The normalization process at this stage includes converting all text to lowercase, removing punctuation, and eliminating numbers. Lowercasing ensures consistency, allowing 'HTTP' and 'http' to be treated identically. Punctuation marks, such as periods, slashes, and question marks, are removed to streamline the text. Table 6 presents the results of applying these normalization steps to the sample input.

Table 6. Normalization Results

Input Process	Output Process
<s> http :// localhost : 8080 / tienda 1 / publico / vaciar . jsp ? b 2 = vac iar + carr ito http / 1 . 1 </s>	<s> http :// localhost : 8080 / tienda 1 / publico / vaciar . jsp ? b 2 = vac iar + carr ito http / 1 . 1 </s>

Model Implementation

In this study, the implementation of the Transformer model with the integration of Natural Language Processing (NLP) for network intrusion detection is conducted through several key stages. The first stage is data processing, which includes normalization, batch processing, and splitting the data into training and testing sets with ratios of 70/30, 80/20, and 90/10. In the NLP processing, steps such as case folding, text normalization, tokenization, and stemming are performed to ensure the text is in a consistent format. Tokenization uses the DistilBERT Tokenizer to convert the text into tokens that the Transformer model can process.

As shown in Figure 1, the architecture for network intrusion detection with Transformer and NLP integration is implemented according to Algorithm 1. In the model training stage, DistilBERT, initialized with default parameters, is used to handle the Multi-Head Attention, Add & Norm, and Feed Forward layers. The model is trained using the Adam optimizer with a learning rate of 2e-5 and the Cross-Entropy loss function. Training is conducted over three epochs with a batch size of 8. Model evaluation is performed by measuring metrics such as accuracy, recall, F1 score, and ROC-AUC to ensure the model's performance in detecting network intrusion categories classified as "Normal" and "Anomalous." Evaluation results indicate that the integration of the Transformer model and NLP is effective in detecting web application attacks and significantly contributes to the improvement of

the network intrusion detection system's accuracy. The parameters of the Transformer model integrated with NLP are shown in Table 7.

Table 7. Parameter Model

Parameter	Value
Input Shape	Input_dim
NLP Pre-processing	Case Folding, Normalization, Tokenization, Stemming
Tokenization	DistilBERTTokenizer
Multi-Head Attention	Num_heads=8, dim_model=512
Add & Norm	Layer Normalization
Feed Forward	Dense (2048, Activation='ReLU')
Linear Layer	Dense (256, activation='softmax')
Softmax Layer	Dense(num_classes, activation='softmax')
Optimizer	AdamW (learning_rate=2e-5)
Loss Function	Cross-Entropy Loss
Training Parameter	Epoch=3, Batch Size=8
Evaluation Matrix	Accuracy, Recall, F1 Score, AUC

Evaluation

The implemented model is then evaluated to test its performance. Compared to traditional algorithms such as DNN, Random Forest, and SVM, the Transformer-NLP model showed marked improvements in accuracy and AUC. Previous studies using conventional methods often struggled to maintain high detection rates across varied datasets, while the Transformer model's adaptive architecture proved effective in handling diverse attack types, as evidenced by its consistently higher AUC scores across multiple data splits. The evaluation uses equations (12), (14), (15), and (16). The results are shown in Tables 8, 9, and 10. Subsequently, the model's performance is tested using the ROC curves, which are displayed in Figures 2, 3, and 4.

Table 8. Evaluation Using 80-20 Training Split

Algorithm	A _c	R _e	F ₁	AUC
DNN	0.76	0.78	0.74	0.83
RF	0.83	0.98	0.82	0.92
DT	0.82	0.93	0.80	0.88
SVM	0.80	0.89	0.72	0.82
KNN	0.81	0.94	0.80	0.90
XGBoost	0.83	0.96	0.82	0.93
NB	0.63	0.33	0.42	0.59
Trans+NLP	0.85	0.95	0.83	0.94

Table 9. Evaluation Using 70-30 Training Split

Algorithm	A _c	R _e	F ₁	AUC
DNN	0.79	0.78	0.74	0.83
RF	0.83	0.98	0.82	0.88
DT	0.82	0.93	0.80	0.88
SVM	0.73	0.89	0.72	0.82
KNN	0.81	0.94	0.72	0.90
XGBoost	0.83	0.96	0.82	0.93
NB	0.64	0.33	0.42	0.59
Trans+NLP	0.85	0.95	0.83	0.94

Table 10. Evaluation Using 90-10 Training Split

Algorithm	A _c	R _e	F ₁	AUC
DNN	0.77	0.52	0.65	0.85
RF	0.83	0.99	0.83	0.93
DT	0.83	0.94	0.82	0.90
SVM	0.72	0.86	0.72	0.84
KNN	0.80	0.87	0.78	0.89
XGBoost	0.83	0.94	0.82	0.92
NB	0.63	0.30	0.40	0.85
Trans+NLP	0.85	0.95	0.84	0.94

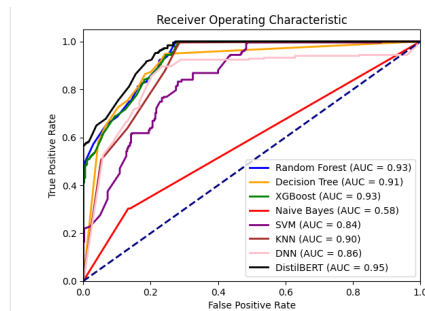


Figure 2. ROC for 90-10 Model

Statistical Validation

To test the reliability of the built model, we conducted evaluations using the Friedman test and t-test to compare its performance with other models[36]. We designated the proposed model as the control method in this experiment, and the significance level α for the statistical tests was set at 0.05. Generally, a smaller p-value indicates a significant difference between comparison methods. The results of the Friedman test and t-test are shown in Table 11.

Table 11. Friedman Test and T-test Results

	DNN	DT	XB	NB	SVM	KNN	RF
Friedman	0.0009	0.005	0.019	2.159	0.0001	0.006	0.04
T-Test	8.705	5.35	3.765	40.785	13.19	5.244	2.99

Table 12. Impact of Hyperparameter λ on Model Performance

λ	A _c	R _c	F ₁	Auc
1e-05	0.856	0.944	0.843	0.948
2e-05	0.852	0.944	0.840	0.950
3e-05	0.851	0.906	0.841	0.946
5e-05	0.849	0.952	0.838	0.946

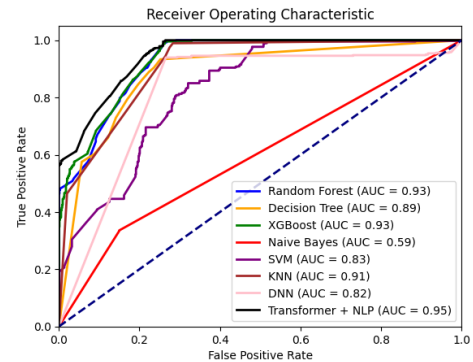


Figure 3. ROC for 80-20 Model

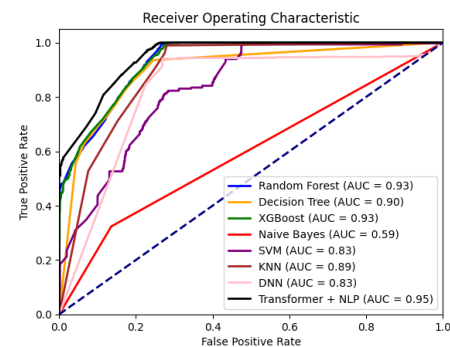


Figure 4. ROC for the 70-30 Model

Parameter Sensitivity

In this section, we examine the impact of the hyperparameter, denoted by λ , on the proposed detection model. This analysis aims to understand how variations in λ influence the model's performance and effectiveness. The study involves adjusting the λ values and observing changes in key performance metrics, such as accuracy, recall, F1 score, and ROC-AUC. The results of this hyperparameter tuning are presented in Table 12, illustrating the relationship between different λ values and the corresponding performance metrics. This detailed evaluation helps in identifying the optimal λ setting for achieving the best detection results.

Based on Table 12, although the AUC value remains the same (0.95) for several learning rate values, other metrics such as Accuracy, Recall, and F1 Score vary. The model with a learning rate of $2e-05$ shows the highest AUC of 0.9505, indicating slightly better performance compared to other learning rates. Models with learning rates of $1e-05$ and $3e-05$ exhibit nearly the same AUC values (around 0.9490) but with variations in Accuracy and Recall. The ROC curve, illustrating sensitivity, is shown in Figure 5.

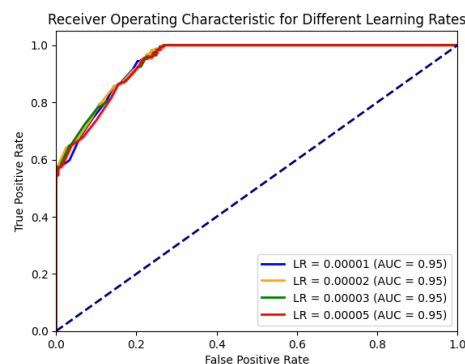


Figure 5. ROC Curve for Sensitivity Analysis of Parameters

Discussion

This study demonstrates that integrating the Transformer model with NLP techniques significantly enhances the performance of NIDS for web applications. The use of the Transformer model, with its self-attention mechanism, allows for capturing complex dependencies in sequential data, such as HTTP requests, which is crucial for detecting intricate attack patterns within dynamic and diverse web traffic. The CSIC 2010 dataset used in this study was processed through several pre-processing steps, including tokenization, stemming, lemmatization, and normalization, to ensure data consistency. Text representation techniques such as Word2Vec, BERT, and TF-IDF were employed to enable the Transformer model to effectively capture contextual relationships in network log data.

The model's performance evaluation demonstrated superior results compared to traditional algorithms like Deep Neural Network (DNN), Random Forest (RF), Decision Tree (DT), Support Vector Machine (SVM), k-nearest Neighbor (KNN), XGBoost, and Naive Bayes (NB). The Transformer-NLP model achieved higher accuracy (up to 85%), recall (95%), F1 score (83%), and AUC (0.95) across training/testing splits of 80/20, 70/30, and 90/10. This performance is especially significant when compared to traditional models, which showed

lower AUC values, indicating that the Transformer-NLP approach provides a more robust framework for intrusion detection across various scenarios, with the best AUC value of 0.9505 at a learning rate of $2e-05$, demonstrating its ability to adapt to different training scenarios. The ROC curve further illustrated the model's superior capability in distinguishing between normal and anomalous traffic, proving more reliable than the other models tested.

Statistical validation using the Friedman test and t-test confirmed the reliability and practical significance of the proposed model. Hyperparameter sensitivity analysis indicated that variations in the λ value impacted the model's performance, with a learning rate of $2e-05$ providing the optimal results. These findings suggest that the proposed Transformer-NLP model is not only effective in improving detection accuracy but also offers a robust framework for reducing false positives, enhancing the overall security posture of web applications in response to increasingly sophisticated cyber threats.

Additionally, the model effectively detects complex attack patterns, especially in text-based inputs like SQL injection and XSS, enhancing web application security, and preventing unauthorized access and malicious data manipulation. The Transformer-NLP model's unique integration of NLP for preprocessing and the self-attention mechanism significantly reduces false positive rates. This reduction enhances both efficiency and reliability in real-world scenarios, as it minimizes unnecessary alerts and focuses security resources on genuine threats. By improving precision and recall, this model presents a more reliable solution for continuous, real-time web application monitoring, minimizing unnecessary alerts and enabling security teams to focus on genuine threats. This improvement in detection accuracy directly bolsters the resilience of web applications against evolving attack methods, helping to maintain data integrity, confidentiality, and availability.

However, this study has certain limitations. First, the CSIC 2010 dataset, while useful for evaluating web application security, may not fully capture the range of modern web application attack techniques, potentially limiting the model's applicability to newer or more varied threats. Second, the computational demands of both Transformer models and NLP preprocessing may pose challenges for practical deployment, particularly in environments with constrained resources. Additionally, while this study focused on optimizing performance metrics such as accuracy and AUC, it did not extensively address potential overfitting, which can be a

concern with complex models trained on relatively limited datasets. Future research should explore the use of larger, more diverse datasets and further refine the model to balance computational efficiency with detection capability.

CONCLUSION

This study demonstrates that integrating the Transformer model with NLP techniques significantly improves NIDS performance for web applications by capturing complex contextual relationships in network log data. The Transformer-NLP model outperformed traditional algorithms, including DNN, RF, DT, SVM, KNN, XGBoost, and NB, across key metrics (accuracy, recall, F1 score, and AUC), addressing a crucial gap in current NIDS methods. Statistical validation using the Friedman and t-tests further supports the model's robustness and practical effectiveness, especially in handling the dynamic nature of web traffic.

However, limitations remain. The CSIC 2010 dataset may not fully reflect modern web application threats, which could affect generalizability. Additionally, the model's high computational demands pose challenges for real-world deployment. This study also did not deeply explore overfitting, which could impact performance given the dataset size. Future work should examine strategies such as regularization and cross-validation to enhance model robustness, along with architectural optimizations to improve computational efficiency for practical deployment in constrained environments.

REFERENCES

- [1] A. A. Bouramdane, "Cyberattacks in Smart Grids: Challenges and Solving the Multi-Criteria Decision-Making for Cybersecurity Options, Including Ones That Incorporate Artificial Intelligence, Using an Analytical Hierarchy Process," *J. Cybersecurity Priv.*, vol. 3, no. 4, pp. 662–705, 2023, doi: 10.3390/jcp3040031.
- [2] J. A. Dharma and Rino, "Network Attack Detection Using Intrusion Detection System Utilizing Snort Based on Telegram," *bit-Tech*, vol. 6, no. 2, pp. 118–126, 2023, doi: 10.32877/bt.v6i2.943.
- [3] O. J. Falana, I. O. Ebo, C. O. Tinubu, O. A. Adejimi, and A. Ntuk, "Detection of Cross-Site Scripting Attacks using Dynamic Analysis and Fuzzy Inference System," *2020 Int. Conf. Math. Comput. Eng. Comput. Sci. ICMCECS 2020*, 2020, doi: 10.1109/ICMCECS47690.2020.240871.
- [4] P. Dini, A. Elhanashi, A. Begni, S. Saponara, Q. Zheng, and K. Gasmi, "Overview on Intrusion Detection Systems Design Exploiting Machine Learning for Networking Cybersecurity," *Appl. Sci.*, vol. 13, no. 13, 2023, doi: 10.3390/app13137507.
- [5] N. Agarwal and S. Z. Hussain, "A Closer Look at Intrusion Detection System for Web Applications," *Secur. Commun. Networks*, vol. 2018, 2018, doi: 10.1155/2018/9601357.
- [6] Y. J. Park and J. C. Park, "Web Application Intrusion Detection System for input validation attack," *Proc. - 3rd Int. Conf. Conver. Hybrid Inf. Technol. ICCIT 2008*, vol. 2, pp. 498–504, 2008, doi: 10.1109/ICCIT.2008.338.
- [7] S. Sasipriya, L. R. Madhan Kumar, R. Raghuram Krishnan, and K. Naveen Kumar, "Intrusion Detection System in Web Applications (IDSWA)," *Proc. - 5th Int. Conf. Intell. Comput. Control Syst. ICICCS 2021*, no. Iciccs, pp. 311–314, 2021, doi: 10.1109/ICICCS51141.2021.9432086.
- [8] M. Verkerken, L. D'hooge, T. Wauters, B. Volckaert, and F. De Turck, "Towards Model Generalization for Intrusion Detection: Unsupervised Machine Learning Techniques," *J. Netw. Syst. Manag.*, vol. 30, no. 1, pp. 1–25, 2022, doi: 10.1007/s10922-021-09615-7.
- [9] L. Ashiku and C. Dagli, "Network Intrusion Detection System using Deep Learning," *Procedia Comput. Sci.*, vol. 185, no. June, pp. 239–247, 2021, doi: 10.1016/j.procs.2021.05.025.
- [10] R. Sudiyarno, A. Setyanto, and E. T. Luthfi, "Peningkatan Performa Pendeteksian Anomali Menggunakan Ensemble Learning dan Feature Selection Anomaly Detection Performance Improvement Using Ensemble Learning and Feature Selection," *Citec J.*, vol. 7, no. 1, pp. 1–9, 2020.
- [11] S. Das, M. Ashrafuzzaman, F. T. Sheldon, and S. Shiva, "Network Intrusion Detection using Natural Language Processing and Ensemble Machine Learning," *2020 IEEE Symp. Ser. Comput. Intell. SSCI 2020*, no. M1, pp. 829–835, 2020, doi: 10.1109/SSCI47803.2020.9308268.
- [12] R. Sujatha, A. Teja, P. Naveen, and J. M. Chatterjee, "Web Application for Traffic

- Monitoring and Guidance,” vol. 10, no. 4, pp. 1–14, 2020, doi: 10.33168/JSMS.2020.0403.
- [13] J. R. Tadhani, V. Vekariya, V. Sorathiya, S. Alshathri, and W. El Shafai, “Securing web applications against XSS and SQLi attacks using a novel deep learning approach,” *Sci. Rep.*, pp. 1–17, 2024, doi: 10.1038/s41598-023-48845-4.
- [14] T. Sowmya and M. A. E. A., “Measurement : Sensors A comprehensive review of AI based intrusion detection system,” *Meas. Sensors*, vol. 28, no. May, p. 100827, 2023, doi: 10.1016/j.measen.2023.100827.
- [15] J. Campino, “Unleashing the transformers: NLP models detect AI writing in education,” *J. Comput. Educ.*, no. 0123456789, 2024, doi: 10.1007/s40692-024-00325-y.
- [16] N. Patwardhan, S. Marrone, and C. Sansone, “Transformers in the Real World : A Survey on NLP Applications,” 2023.
- [17] Z. Long, H. Yan, G. Shen, X. Zhang, H. He, and L. Cheng, “A Transformer-based network intrusion detection approach for cloud security,” *J. Cloud Comput.*, vol. 13, no. 1, 2024, doi: 10.1186/s13677-023-00574-9.
- [18] Y. Liu and L. Wu, “Intrusion Detection Model Based on Improved Transformer,” *Appl. Sci.*, vol. 13, no. 10, 2023, doi: 10.3390/app13106251.
- [19] J. Kim, H. Kang, and P. Kang, “Time-series anomaly detection with stacked Transformer representations and 1D convolutional network,” *Eng. Appl. Artif. Intell.*, vol. 120, no. November 2022, p. 105964, 2023, doi: 10.1016/j.engappai.2023.105964.
- [20] N. Montes, G. Betarte, R. Martínez, and A. Pardo, “Web Application Attacks Detection Using Deep Learning,” *Lect. Notes Comput. Sci. (including Subser. Lect. Notes Artif. Intell. Lect. Notes Bioinformatics)*, vol. 12702 LNCS, pp. 227–236, 2021, doi: 10.1007/978-3-030-93420-0_22.
- [21] A. D. Y. SURYADI, “Pengembangan Intrusion Detection System (IDS) Berbasis Machine Learning,” vol. 13, no. 3, pp. 189–195, 2022, [Online]. Available: <https://repository.mercubuana.ac.id/63488/>.
- [22] A. Nurdin, B. Anggo Seno Aji, A. Bustamin, and Z. Abidin, “Perbandingan Kinerja Word Embedding Word2Vec, Glove, Dan Fasttext Pada Klasifikasi Teks,” *J. Tekno Kompak*, vol. 14, no. 2, p. 74, 2020, doi: 10.33365/jtk.v14i2.732.
- [23] S. R. Choi and M. Lee, “Transformer Architecture and Attention Mechanisms in Genome Data Analysis: A Comprehensive Review,” *Biology (Basel)*, vol. 12, no. 7, 2023, doi: 10.3390/biology12071033.
- [24] H. Salih Abdullah and A. Mohsin Abdulazeez, “Detection of SQL Injection Attacks Based on Supervised Machine Learning Algorithms: A Review,” *Int. J. Informatics, Inf. Syst. Comput. Eng.*, vol. 5, no. 2, pp. 152–165, 2024, doi: 10.34010/injiiscom.v5i2.12731.
- [25] H. Wang and W. Li, “DDosTC: A transformer-based network attack detection hybrid mechanism in SDN,” *Sensors*, vol. 21, no. 15, 2021, doi: 10.3390/s21155047.
- [26] Z. Gao, Y. Shi, and S. Li, “Self-attention and long-range relationship capture network for underwater object detection,” *J. King Saud Univ. - Comput. Inf. Sci.*, vol. 36, no. 2, p. 101971, 2024, doi: 10.1016/j.jksuci.2024.101971.
- [27] H. Kheddar, “Transformers and Large Language Models for Efficient Intrusion Detection Systems : A Comprehensive Survey,” pp. 1–34.
- [28] H. Zhang and M. O. Shafiq, “Survey of transformers and towards ensemble learning using transformers for natural language processing,” *J. Big Data*, 2024, doi: 10.1186/s40537-023-00842-0.
- [29] D. E. Cahyani and I. Patasik, “Performance comparison of TF-IDF and Word2Vec models for emotion text classification,” vol. 10, no. 5, pp. 2780–2788, 2021, doi: 10.11591/eei.v10i5.3157.
- [30] G. Zachos, I. Essop, G. Mantas, K. Porfyraakis, J. C. Ribeiro, and J. Rodriguez, “Anomaly-Based Intrusion Detection System for Internet of Medical Things Networks,” *Electronics*, no. June, pp. 1–25, 2021.
- [31] A. Aldallal, “Toward Efficient Intrusion Detection System Using Hybrid Deep Learning Approach,” *Symmetry*, 2022.
- [32] A. Chandra, L. Tünnermann, T. Löfstedt, and R. Gratz, “Transformer-based deep learning for predicting protein properties in the life sciences,” *Elife*, vol. 12, pp. 1–25, 2023, doi: 10.7554/eLife.82819.
- [33] T. Lin, Y. Wang, X. Liu, and X. Qiu, “A survey of transformers,” *AI Open*, vol. 3, no. October, pp. 111–132, 2022, doi:

- 10.1016/j.aiopen.2022.10.001.
- [34] R. Cao, J. Wang, M. Mao, G. Liu, and C. Jiang, "Feature-wise attention based boosting ensemble method for fraud detection," *Eng. Appl. Artif. Intell.*, vol. 126, no. PC, p. 106975, 2023, doi: 10.1016/j.engappai.2023.106975.
- [35] T. S. Lestari, I. Ismaniah, and W. Priatna, "Particle Swarm Optimization for Optimizing Public Service Satisfaction Level Classification," *J. Nas. Pendidik. Tek. Inform.*, vol. 13, no. 1, pp. 147–155, 2024, doi: 10.23887/janapati.v13i1.69612.
- [36] J. Liu and Y. Xu, "T-Friedman Test: A New Statistical Test for Multiple Comparison with an Adjustable Conservativeness Measure," *Int. J. Comput. Intell. Syst.*, vol. 15, no. 1, pp. 1–19, 2022, doi: 10.1007/s44196-022-00083-8.
- [37] W. Priatna, H. Dwi Purnomo, A. Iriani, I. Sembiring, and T. Wellem, "Optimizing Multilayer Perceptron with Cost-Sensitive Learning for Addressing Class Imbalance in Credit Card Fraud Detection," *Resti*, vol. 8, no. 4, pp. 19–25, 2024.